EP 150

Rubber acoustic isolation mount with metal bracket for the resilient attachment of independent wall linings. Simple installation and effective reduction of structure-borne sound.



The **EP 150** is a rubber acoustic isolation mount designed for the **resilient attachment of independent wall linings and acoustic wall assemblies**, reducing the transmission of vibration and **structure-borne sound** to the supporting structure.

Its design combines a **resilient rubber element with a metal bracket**, providing a simple and robust attachment for the supporting framing while maintaining acoustic decoupling at the attachment point.

The rubber element limits **acoustic bridges** and reduces vibration transmission between the framing and the supporting wall. Its compact design facilitates installation and integration into different wall assembly configurations.


The EP 150 provides a **simple, reliable, and economical solution** for independent wall linings, acoustic wall assemblies, and lightweight framing systems requiring localized resilient decoupling.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

Drawings

E.P. 150

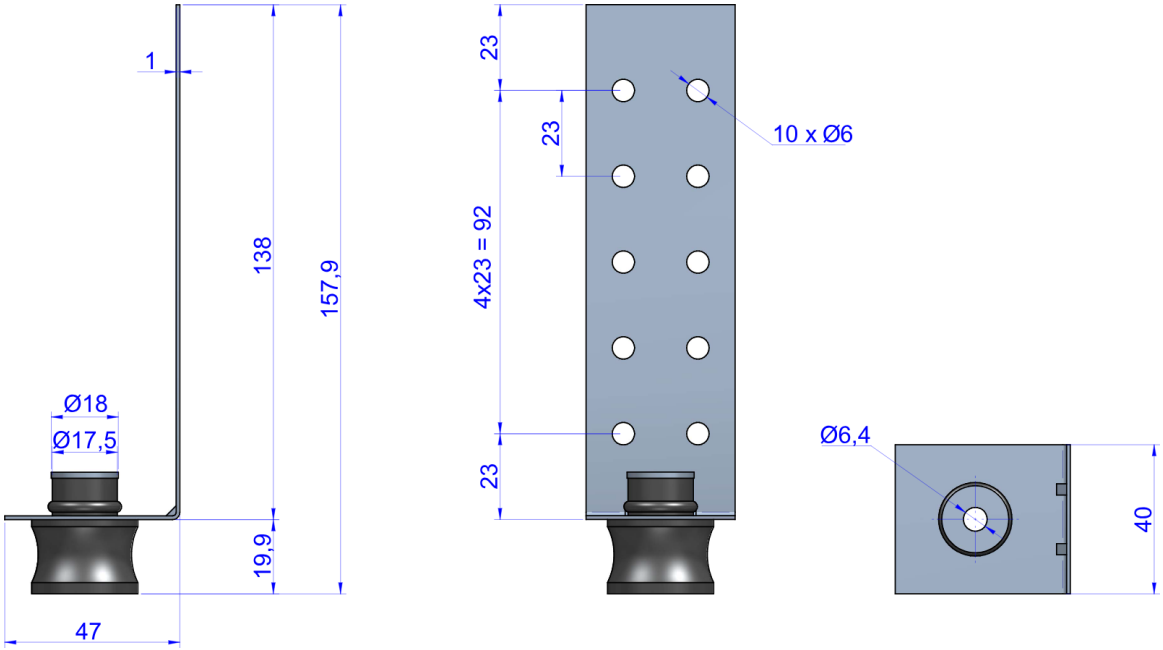

Type	SUMMARY	Max. Load (lbs)	Code	Weight(lbs)
E.P. 150	Mount designed for vibration damping of walls, equipped with long ring-attached screws for threading onto wooden or plastified walls. Maximum load per damper 10 kg.	-	24015	0.15

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

Technical characteristics

- Support with **L-shaped anchoring** for fixing to profiles
- Elastic element made of **natural rubber**
- Direct and cost-effective installation
- Effective reduction of vibrations in walls
- Ideal for **metal wall lining systems**
- Simple and robust solution

Advantages

Excellent value

This mount delivers very high performance for its cost compared to other possible solutions.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.