

# EP 400

Resilient rubber mount with metal bracket and double fixing for the acoustic decoupling of independent wall linings. Simple installation and effective reduction of structure-borne sound.



The **EP 400** is a resilient rubber mount designed for the **acoustic decoupling of independent wall linings and acoustic linings with metal framing**, reducing the transmission of vibrations and **structure-borne sound** to the supporting structure.


Its design combines a **resilient rubber element with a galvanised steel bracket**, allowing the framing to be fixed directly whilst maintaining acoustic decoupling at the fixing point.

The **double fixing point** provides a stable and robust connection for the framing. The resilient rubber element limits **acoustic bridges** and reduces the transmission of vibrations and structure-borne sound between the lining and the supporting wall.

The EP 400 provides a **reliable, robust and easy-to-install solution** for independent wall linings, acoustic linings and metal framing in residential buildings, technical rooms, commercial buildings and other applications requiring effective acoustic decoupling.

## Drawings

### E.P. 400

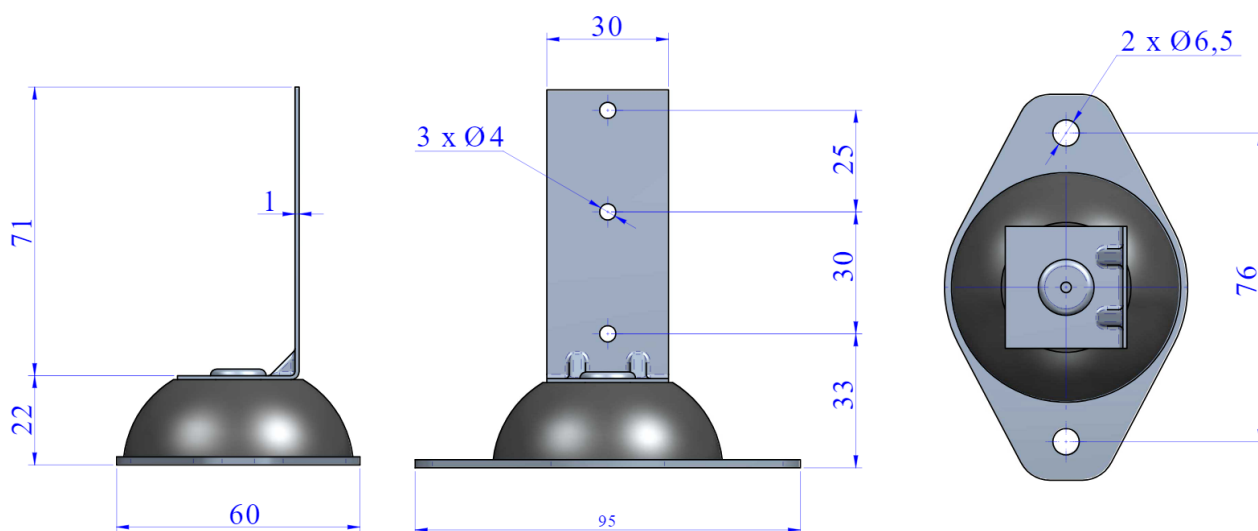

| Type     | SUMMARY                                                                                                                                                                                    | Max. Load(kg) | Code  | Weight(kg) |
|----------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|-------|------------|
| E.P. 400 | This mount is designed to be screwed to the profile, with the possibility of choosing different distances thanks to its 3 holes. The anchoring in to the wall is made by 2 fixing flanges. | -             | 24004 | 0,1        |