EP 500

Resilient rubber mount for the base of independent wall linings. Acoustically decouples the metal framing and plasterboard from the floor.



The **EP 500** is a resilient rubber mount designed for the **acoustic decoupling of independent wall linings and acoustic linings at floor level**, preventing rigid contact with the supporting structure.

The metal track is fixed directly to the upper part of the mount, while a **resilient rubber element provides acoustic decoupling from the floor**. Its design also keeps the plasterboard separated from the floor, helping to prevent the formation of **acoustic bridges**.

The EP 500 reduces the transmission of vibrations and **structure-borne sound** between the wall lining and the building structure. Its simple design facilitates installation and provides continuous acoustic decoupling along the base of the wall system.


It is particularly suitable for **independent wall linings, acoustic linings and metal framing systems** in residential buildings, commercial buildings, technical rooms and other applications requiring improved acoustic isolation.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Drawings

E.P. 500

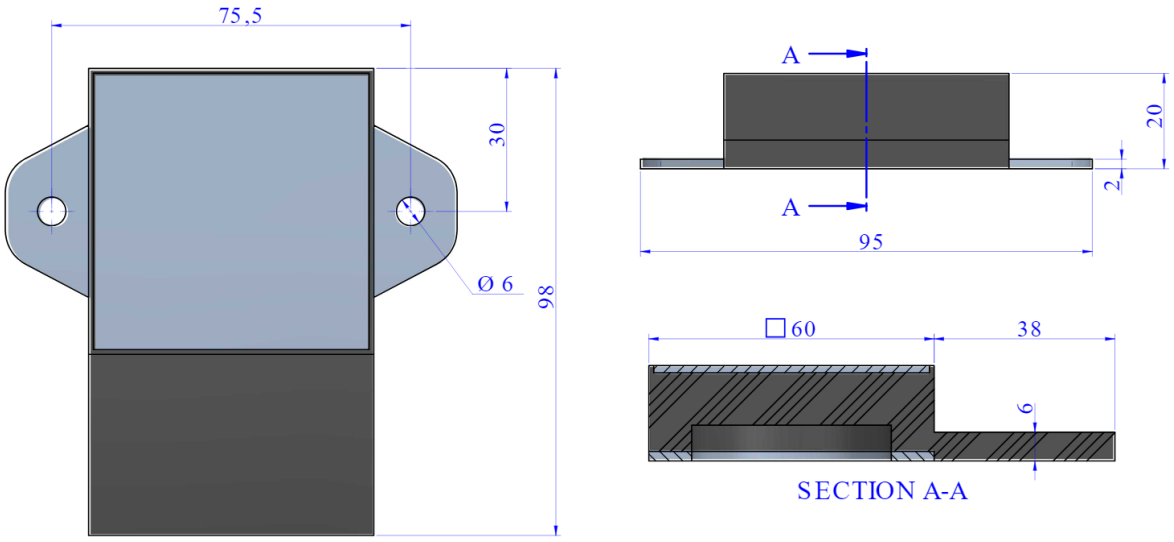

Type	SUMMARY	Max. Load(kg)	Code	Weight(kg)
E.P. 500	This mount is designed to be screwed to the profile, with the possibility of choosing different distances thanks to its 3 holes.The anchoring in to the wall is made by 2 fixing flanges.	-	23156	0,135

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Technical characteristics

- Support with **direct floor bearing** for wall linings
- Upper channel fixing by **screwing**
- **Rubber tongue** prevents rigid contact with the floor
- Improves insulation against **vibrations and structure-borne noise**
- Ideal for **plasterboard systems**
- Simple and effective installation

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Excellent value for money

This mount delivers very high performance for its cost compared with other possible solutions.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.