

FAI

Fire-resistant panel with Type F polyurethane foam and aluminised glass fibre facing. Ideal for acoustic isolation in demanding industrial environments.



The AKUSTIKABSORBER FAI range consists of panels manufactured from Type F fire-resistant polyurethane foam, with an aluminised glass fibre technical facing on the exposed surface. This configuration provides excellent fire performance together with high mechanical, thermal and chemical resistance, making it an effective and durable acoustic isolation material for demanding industrial and technical environments.

The Type F foam core provides a certain degree of sound absorption, particularly at medium and high frequencies, whilst the aluminised glass fibre facing acts as a protective barrier against aggressive agents such as oils, splashes and radiant heat. Although sound absorption is not its primary function, FAI provides an effective combination of protection and acoustic isolation, making it particularly suitable for applications requiring both fire safety and durability.

Thanks to its robust construction and technical finish, FAI is commonly used in acoustic enclosures, electrical cabinets, machinery rooms, technical enclosures and ventilation ducts where a protected surface exposed to the environment and an effective acoustic barrier are required.

Drawings

FAI-15 sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
FAI-15 sheet	26251	-	19	1,335

FAI-15 A sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
FAI-15 A sheet	26253	✓	19	1,335



FAI-25 sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
FAI-25 sheet	26252	-	23	2,085

FAI-25 A sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
FAI-25 A sheet	26254	✓	23	2,085

Elastic properties

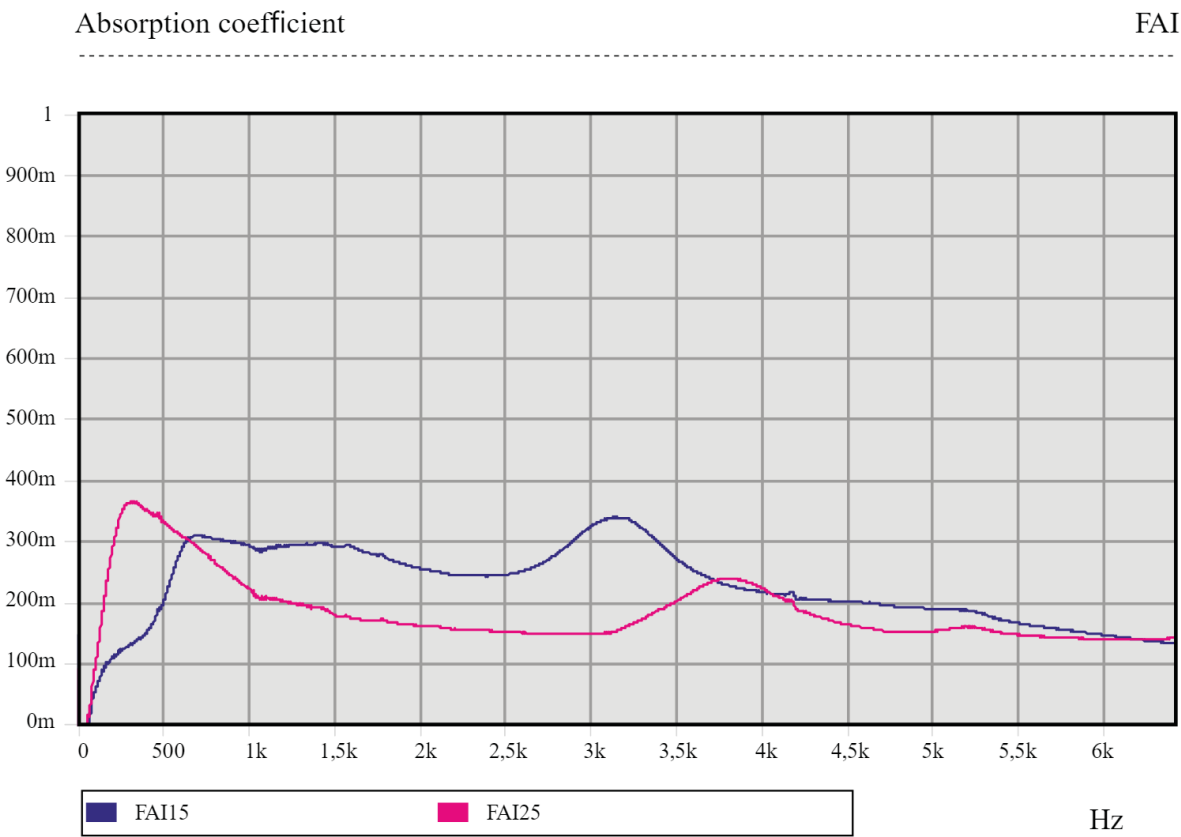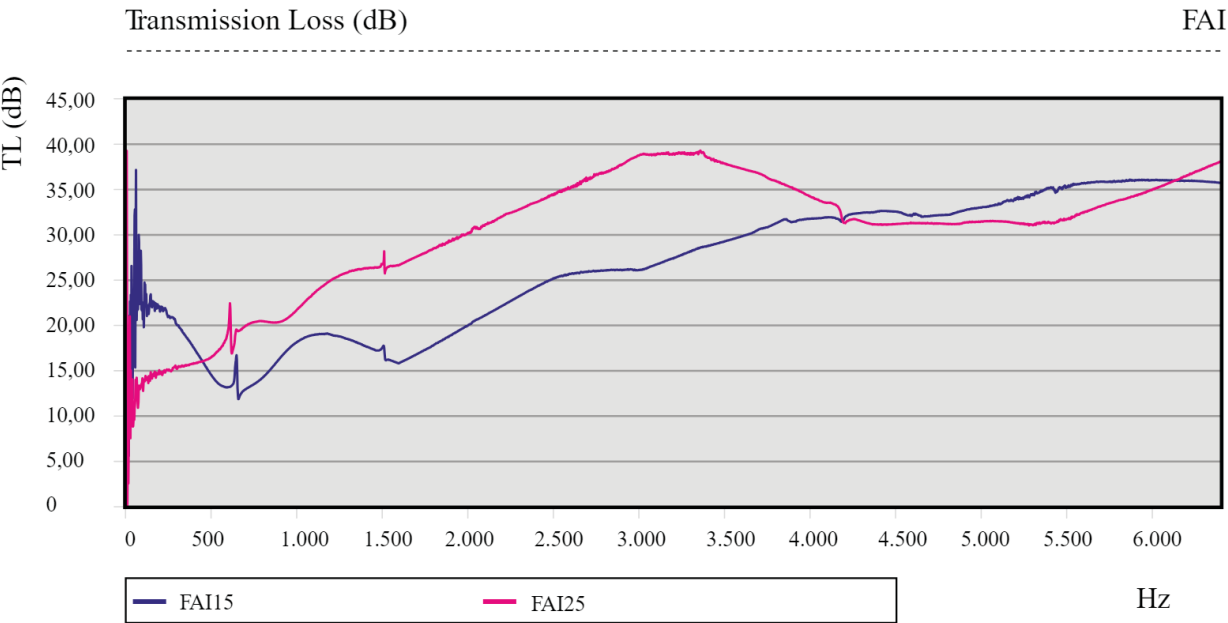

Technical characteristics

- Composition Aluminium facing with fibreglass support and M-1 class fire resistant absorbing polyurethane foam.
- Thicknesses 15mm 25mm

Formats

- Sheets 1200x1000 mm
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.