

FAR

Fire-resistant acoustic absorption panel with a black technical finish. Good sound absorption at medium and high frequencies, ideal for technical rooms and acoustic enclosures.



The FAR range consists of acoustic panels manufactured from Type F fire-resistant open-cell foam with a black non-woven polyester fibre facing. This combination provides excellent sound absorption at medium and high frequencies, together with a discreet appearance particularly suited to visible applications in technical or industrial environments.

The black non-woven polyester facing protects the foam against dust, dirt and light contact whilst remaining acoustically transparent, allowing sound to reach the absorbent core. Its dark colour also provides a neutral finish, making it particularly suitable for machinery interiors, acoustic enclosures, electrical cabinets and technical rooms where a light or reflective surface is not desirable.

The use of fire-resistant foam makes FAR suitable for applications subject to fire-safety requirements, including electrical and industrial environments. Installation is straightforward and can be carried out using technical adhesive or mechanical fixings, depending on the application surface.



Drawings

FAR-15 sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
FAR-15 sheet	26241	-	10	1,335

FAR-15 A sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
FAR-15 A sheet	26242	✓	10	1,335



FAR-25 sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
FAR-25 sheet	26243	-	10	2,085

FAR-25 A sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
FAR-25 A sheet	26244	✓	10	2,085

Elastic properties

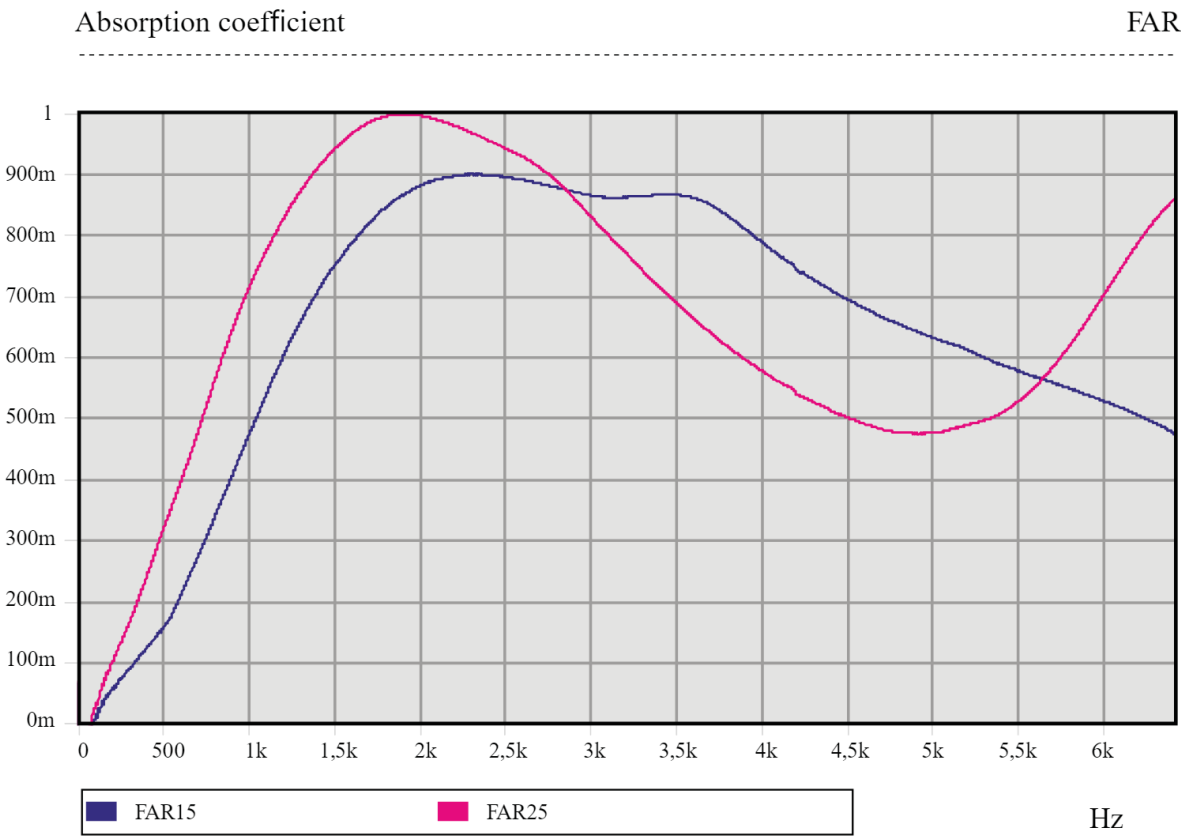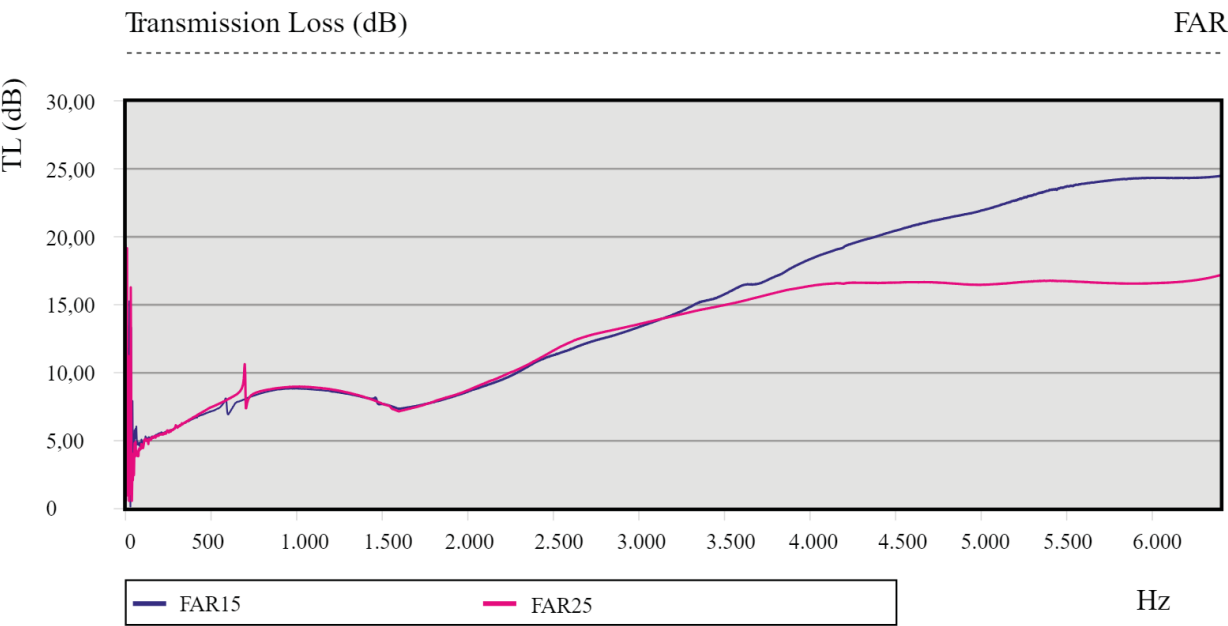

Technical characteristics

- Composition Black unwoven film and M-1 class fire resistant absorbing polyurethane foam.
- Thicknesses 15mm 25mm

Formats

- Sheets 1200x1000 mm
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.
- Rolls Consult for roll manufacturing.

