

G Anti-Vibration Blocks for Floating Floors

Rectangular rubber anti-vibration blocks for the isolation of floating floors. Free-standing installation with no anchoring or mechanical fixing required.



The G anti-vibration blocks are rectangular rubber elements designed for floating floors and other applications where anchoring or mechanical fixing is not required.


Installed beneath the floor profiles or supporting structure, they provide elastic decoupling and effectively reduce the transmission of vibration and structure-borne noise into the building structure.

Their simple design allows quick, free-standing installation while providing stable support and effective load distribution.


They are particularly suitable for framed floating floor systems and other applications requiring a simple, robust and easy-to-install vibration isolation system.

Drawings

G-060 / G-070 / G-080 / G-090 / G-110

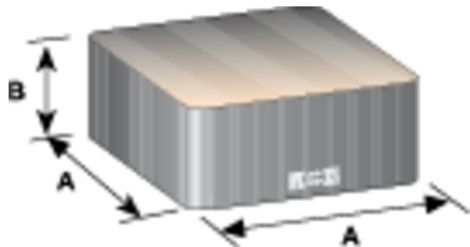

1

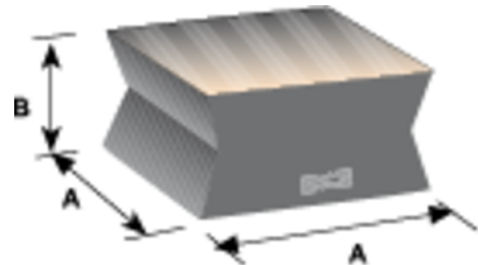

2

Type	Max.Load (kg)	A(mm)	B(mm)	Fig.	Code	Weight(kg)
G-060	400	70	30	1	152005	0,16
G-070	600	80	30	1	152006	0,218
G-080	300	80	50	2	152007	0,313
G-090	500	100	40	1	152008	0,359
G-110	800	110	30	1	152009	0,4



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13




sales@amcsa.es




www.mecanocaucho.com

Elastic properties


Load Deflection Graph

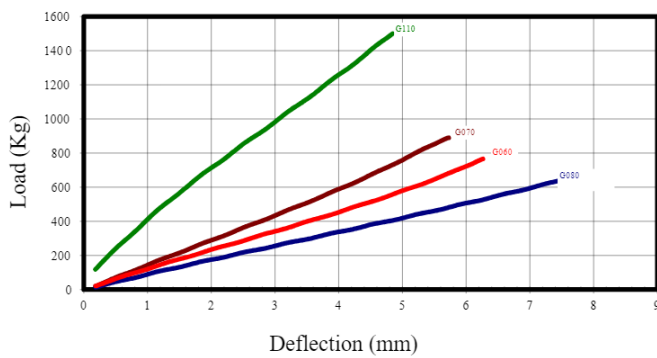

Natural Frequency Graph

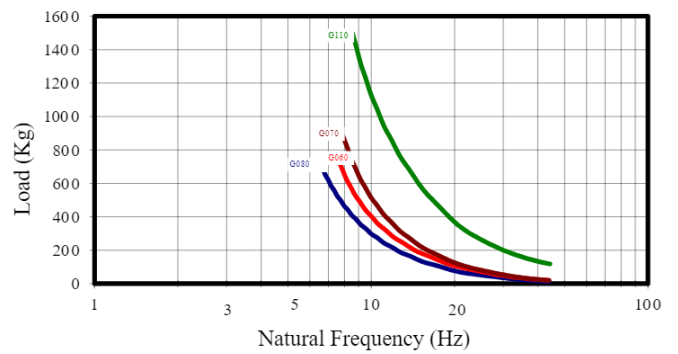

Isolation % and attenuation in dB

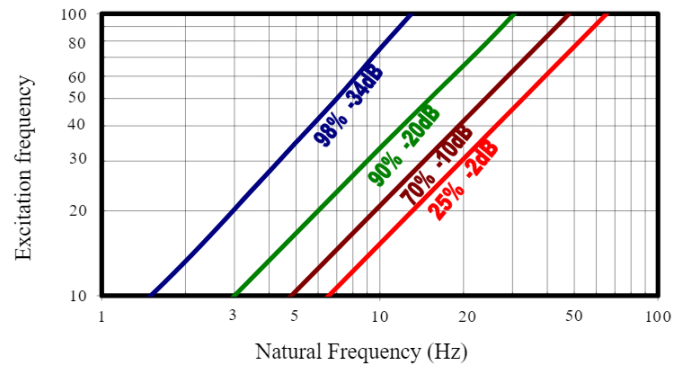

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13



sales@amcsa.es



www.mecanocaucho.com

