BF Vibration Isolators for Floating Floors

Cylindrical rubber vibration isolators for floating floors. Available in different diameters and heights to match isolation performance to project loads.



The BF vibration isolators are designed for floating floor systems requiring effective isolation of vibration and structure-borne noise.

Installed beneath the floating floor, they provide elastic decoupling from the supporting structure, reducing the transmission of vibration into the building.

They are manufactured from rubber with excellent mechanical and elastic properties and are available in different diameters and heights, allowing load capacity and isolation performance to be matched to the requirements of each project.


They can also be used for vibration isolation of machinery operating at speeds of 700 rpm and above, provided that the load and frequency characteristics of the installation are suitable.


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Drawings

BF 50 / BF 125 / BF 200 / BF 400 / BF 500

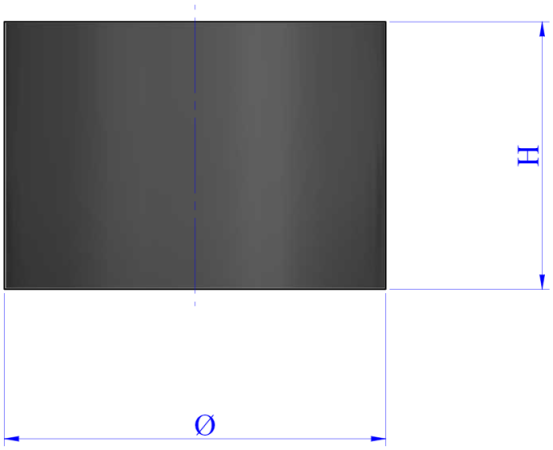

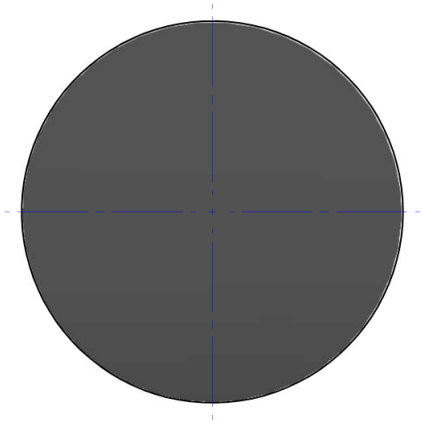



Type	Max. Permanent Load (lbs)	Height(in)	Ø(in)	Code	Weight(lbs)
BF 50	110	1.1	1.57	24201	0.09
BF 125	276	1.42	2.36	24202	0.26
BF 200	441	1.57	3.15	24203	1
BF 400	882	1.57	3.74	24204	1
BF 500	1102	1.97	3.15	24218	1


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Elastic properties

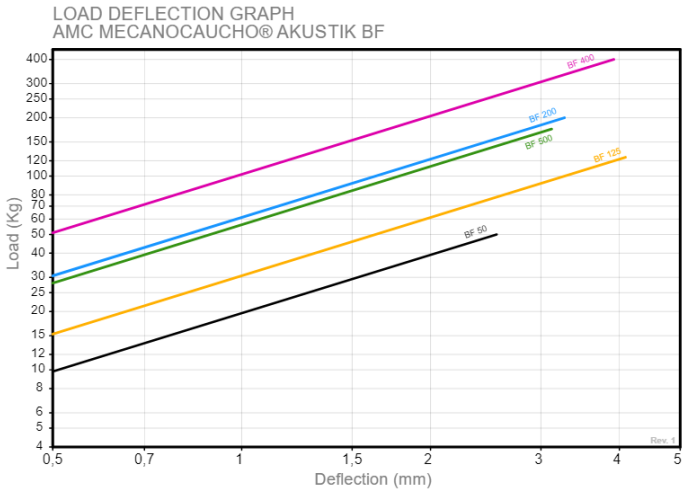

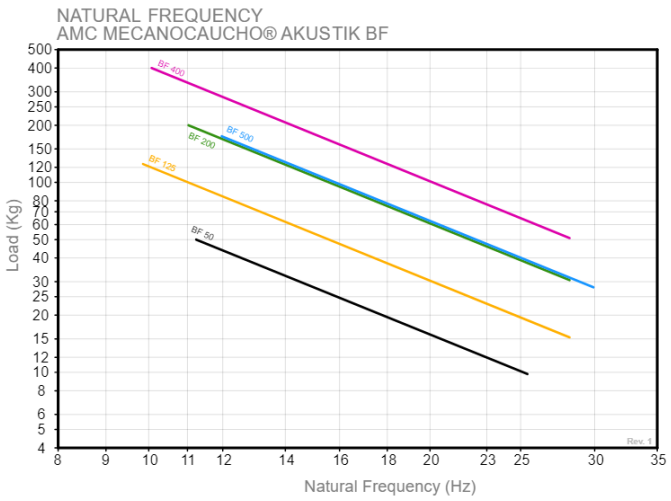

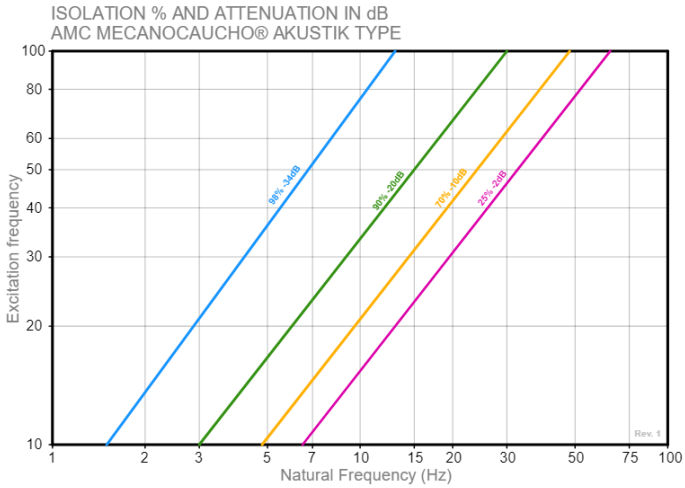

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Advantages

Easy installation

This mount requires no major modifications to the structure for installation.

Excellent value

This mount delivers very high performance for its cost compared to other possible solutions.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.