
MPR+Sylomer®

Resilient Sylomer® mounts for fitness equipment and weight training areas. Reduce vibration and impact noise transmission, particularly from dropped weights.

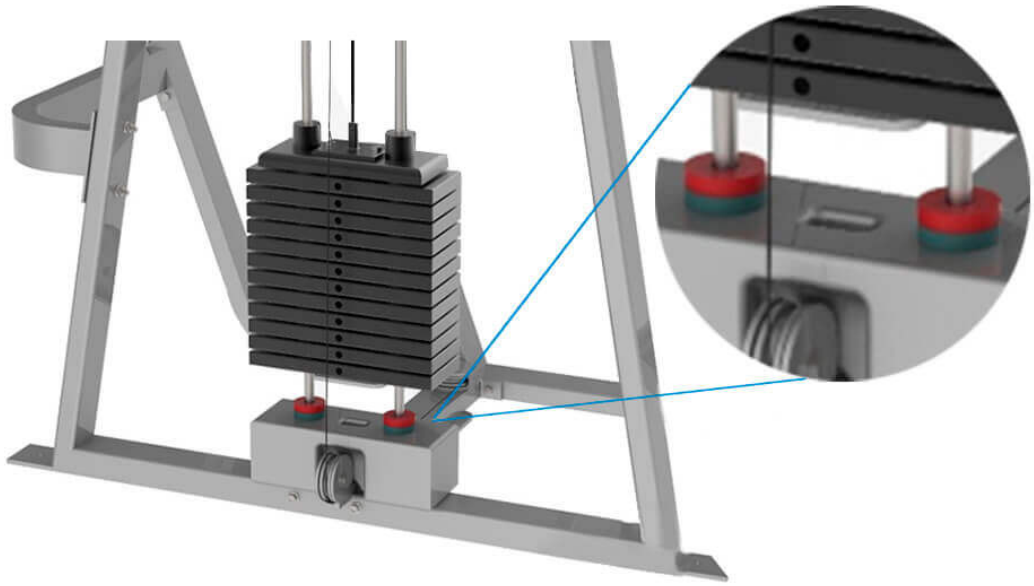

The **MPR + Sylomer® AMC-MECANOCAUCHO®** resilient mounts are specifically designed to **reduce the transmission of vibration, impact noise and structure-borne sound** generated by fitness equipment and weight training activities.

Installed beneath machines, platforms or weightlifting areas, they use the resilient properties of **Sylomer® to absorb the energy generated by impacts and dropped weights**, thereby reducing its transmission into the floor and building structure.

Different Sylomer® grades allow the mounts to be matched to the **load and required level of isolation**, optimising their performance for each application.


MPR + Sylomer® mounts are particularly suitable for **gyms, weight training areas, weightlifting areas and fitness facilities** where controlling vibration, impact noise and structure-borne sound is essential.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.


Drawings

MPR 110

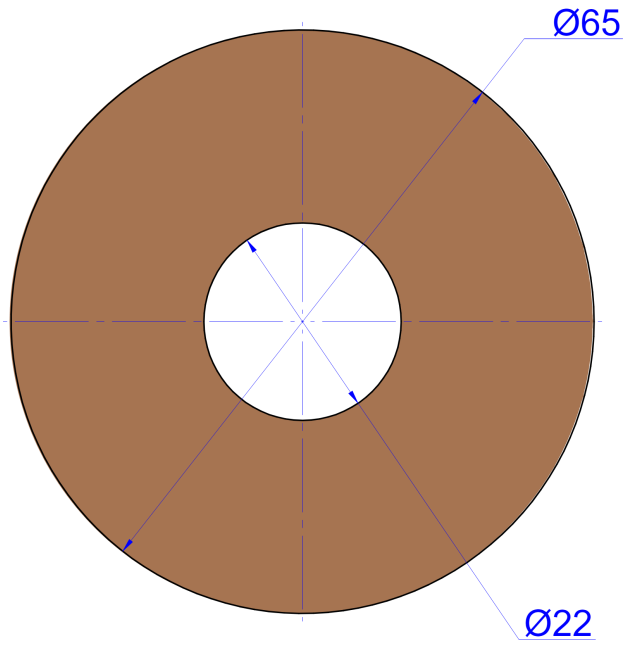

Type	Code	Max. Load(kg)	Color	Thickness(mm)
MPR 110	712386	30	Brown	12
	712321	30	Brown	25

MPR 220

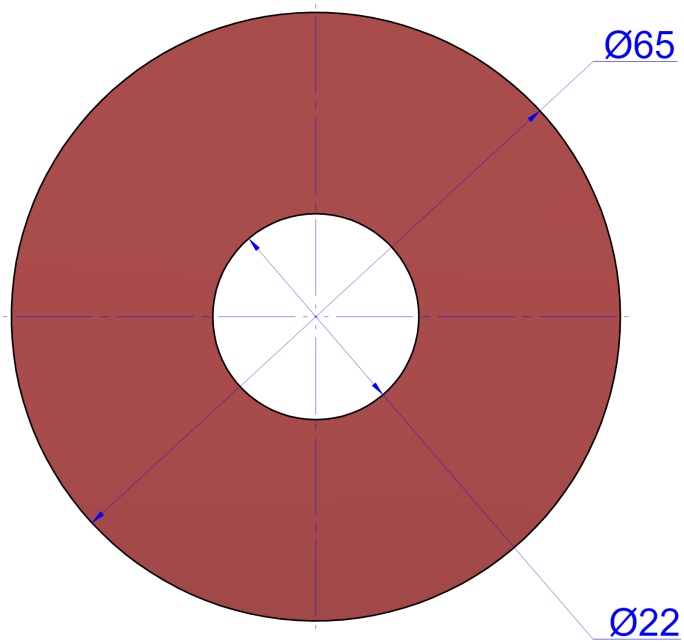


Type	Code	Max. Load(kg)	Color	Thickness(mm)
MPR 220	712387	50	RED	12
	712322	50	RED	25

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.

MPR 450

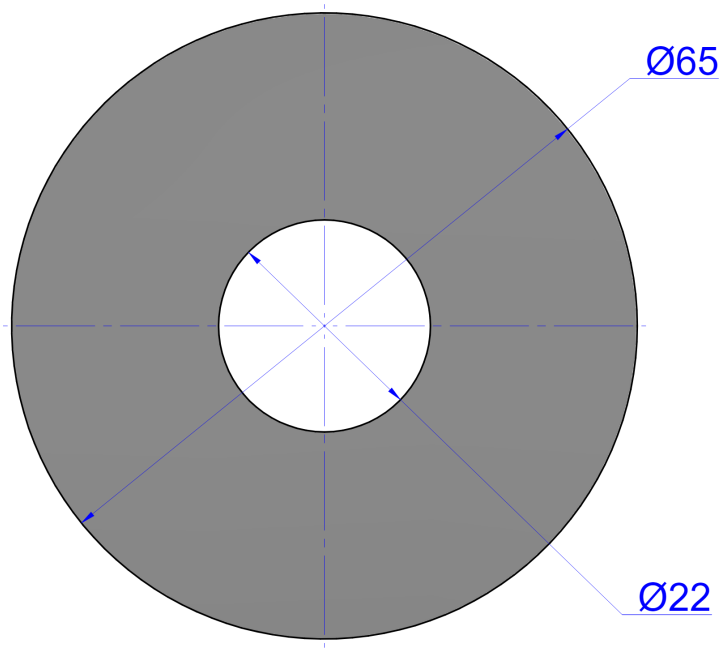



Type	Code	Max. Load(kg)	Color	Thickness(mm)
MPR 450	712388	100	GREY	12
	712323	100	GREY	25


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com


In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.

Elastic properties

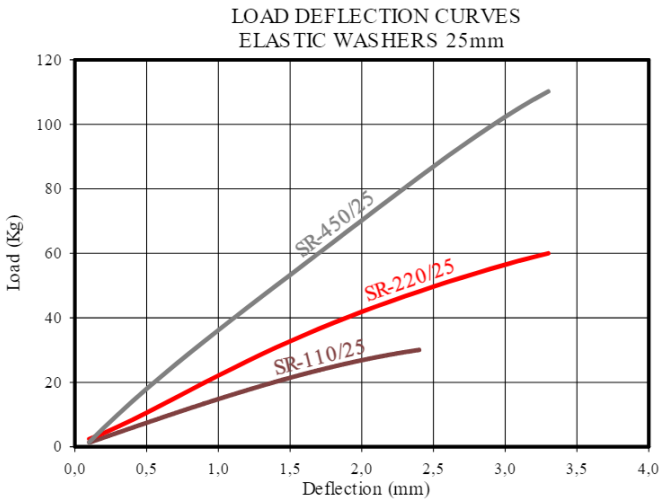

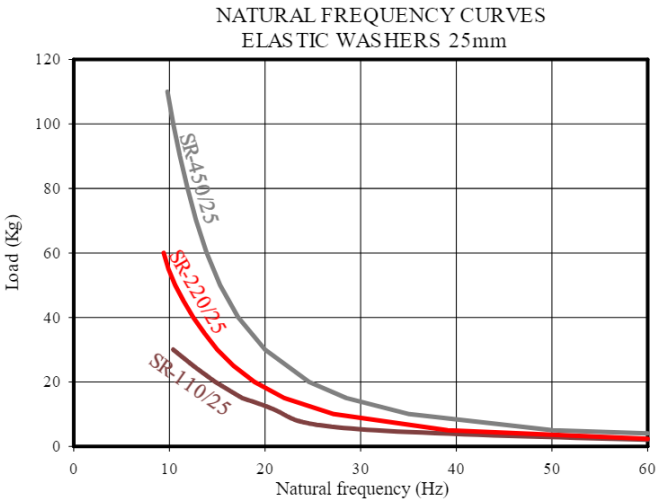

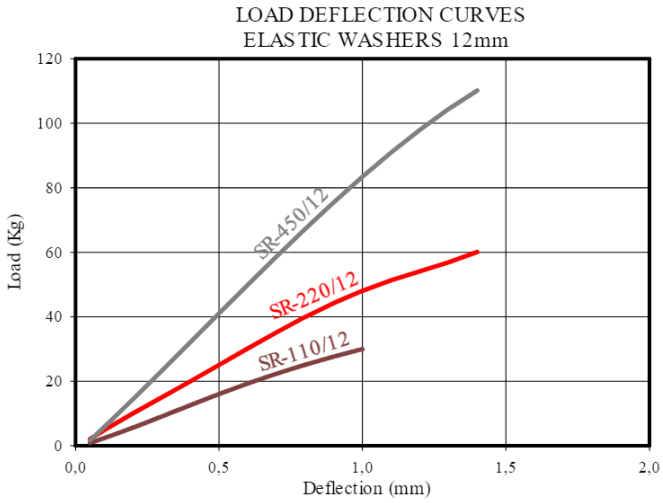

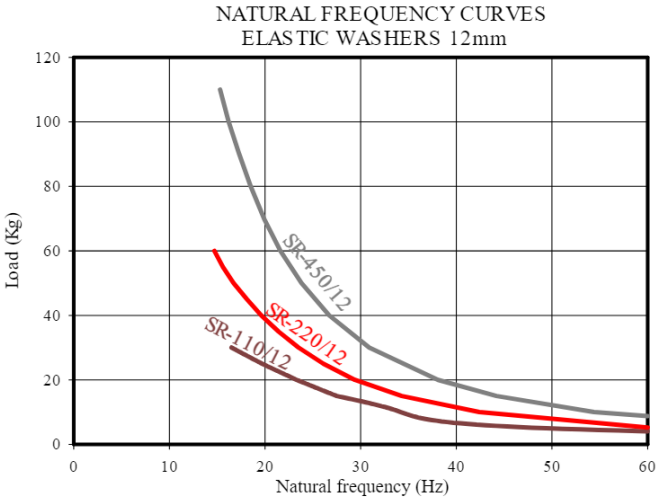

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 13/11/2026.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.