

Hi Sec

Reinforced adjustment system with oversized central nut, ideal for propulsion motors. Supports thrusts and vibrations with anti-corrosive zinc plating.




The **AMC-MECANOCAUCHO® Hi Sec height-adjustment system** is designed for applications requiring **precise engine alignment** and the ability to withstand **high thrust loads and dynamic forces**.

Its heavy-duty construction and **oversized center nut** make it particularly suitable for **marine propulsion engines**, where the mounting system must maintain accurate positioning while transmitting the forces generated by the propulsion system.

The Hi Sec system is **zinc-plated and chromated in accordance with DIN 50961 / ISO 2081**, providing effective corrosion protection for demanding marine and industrial environments.

Drawings

HI SEC

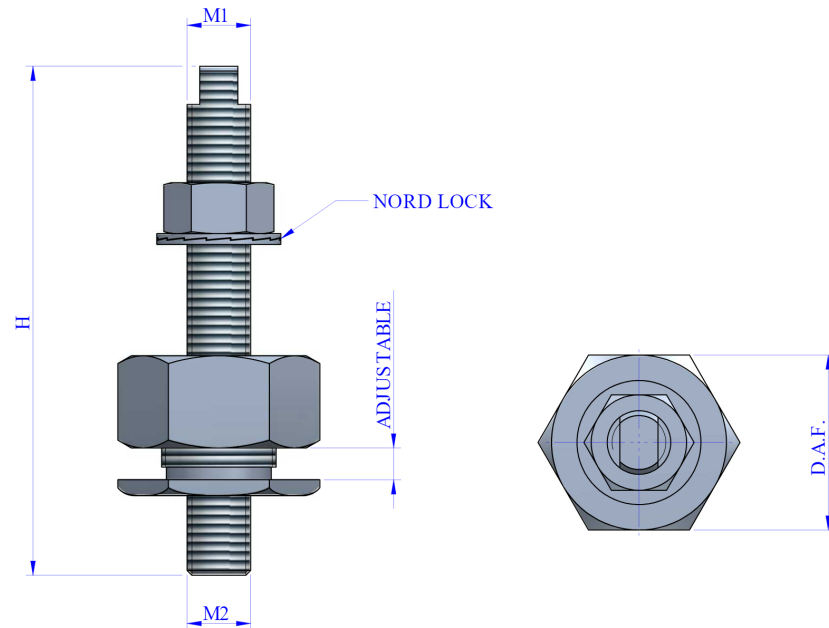

Type	Code	M1	M2	Adjustable(in)	H(in)	Machine Head	D.A.F.(in)	Weight(lbs)
HI SEC	708077	M16	M12	+ 5	4.33	Y	1.81	1
	708007	M16	M16	+ 5	4.33	Y	1.81	1
	708094	M20	M20	+ 5	5.12	N	1.81	2
	708079	M20	M16	+ 10	5.91	Y	2.17	2
	708029	M20	M20	+ 10	6.3	Y	2.17	2
	708005	M20	M20	+ 10	6.3	N	2.17	2
	708011	M24	M24	+ 10	7.87	N	4.72	8

Technical characteristics

DNV rules for ships/ High Speed light craft, Issue Jan 2016 Point 4 Chapter 3 Section1 F202, establishes that standard height adjusters are not acceptable for leveling, due to cyclic bending moments that the studs and bolts are subjected to. This is the reason why leveling of mounts using shims beneath the mounts is the only recommended method for leveling.

AMC-MECANOCAUCHO shares also this method and that is the reason why AMC-MECANOCAUCHO® **Shims** have been developed. In order to achieve a fine leveling **HI-SEC height adjusters** allow a final precise adjusting with security.



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13



sales@amcsa.es



www.mecanocaucho.com