

MD Captive Mounts

High-damping captive mounts designed to combine vibration isolation, stability and movement control.




The **AMC-MECANOCAUCHO® MD captive mounts** have a similar design to the BSB and BRB ranges. Their main distinguishing feature is the use of a **high internal damping synthetic elastomer compound**.

This formulation enables the mounts to **effectively dissipate vibrational energy and reduce movement amplitudes**, particularly during **transient conditions and when passing through resonance frequencies**. MD mounts therefore provide an excellent balance of **vibration isolation, damping and equipment stability**.

Thanks to their ability to control oscillations, they are particularly suitable for **engines, generator sets, pumps, compressors, and mobile or stationary machinery** subjected to dynamic loads and requiring a **stable, highly damped suspension**.



Drawings

A / B / C / D

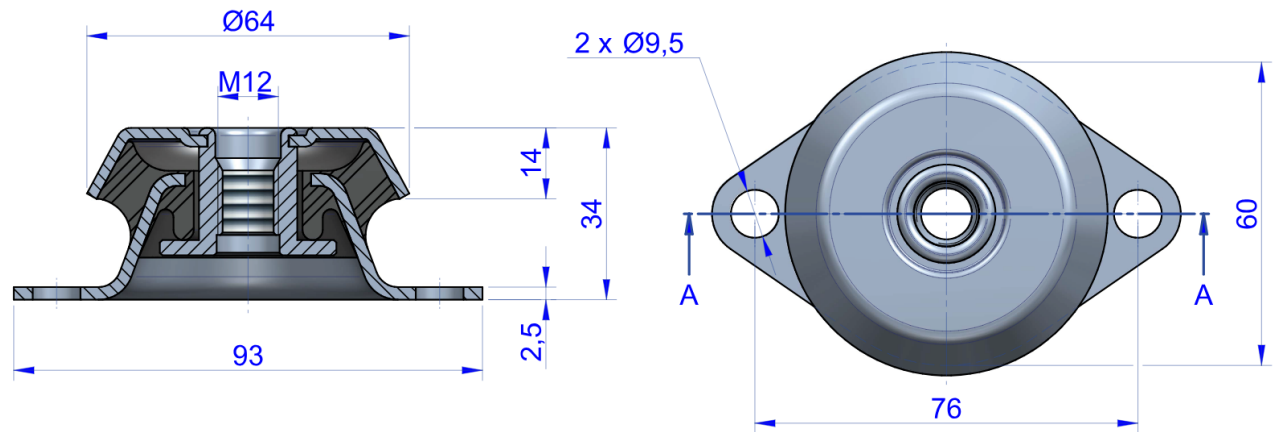

Type	Tightening torque Max. (Nm)	Max. Load(kg)	Weight(gr)	Code
A	55	130	238	135210
B	55	105	238	135212
C	55	70	238	135213
D	55	50	238	135219

Elastic properties

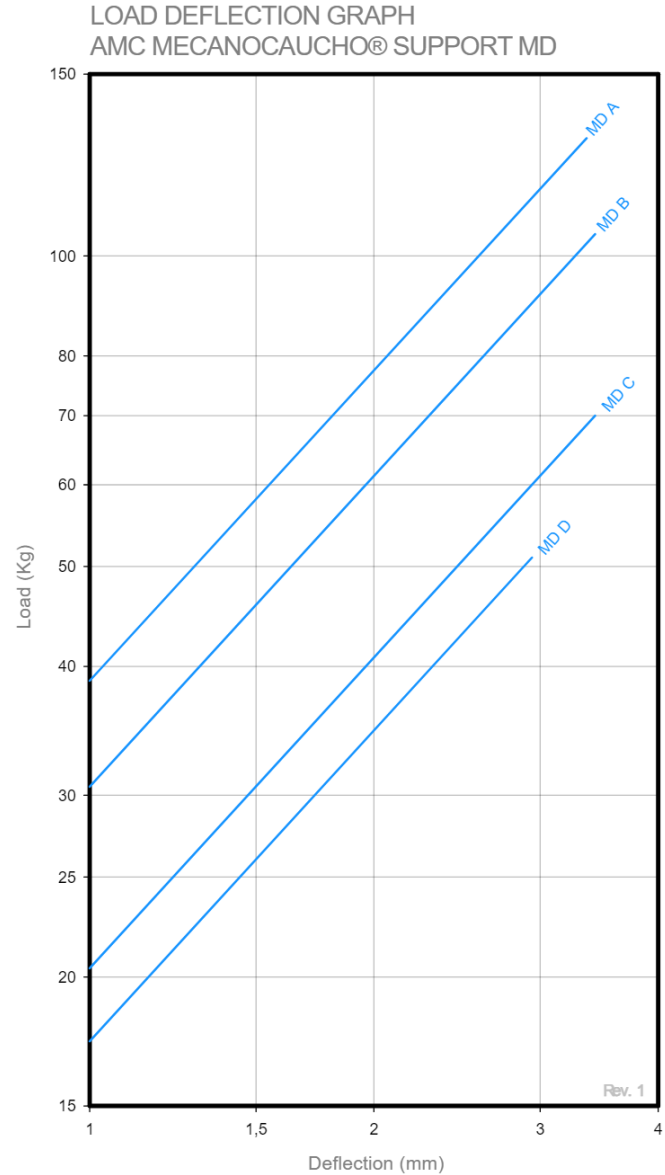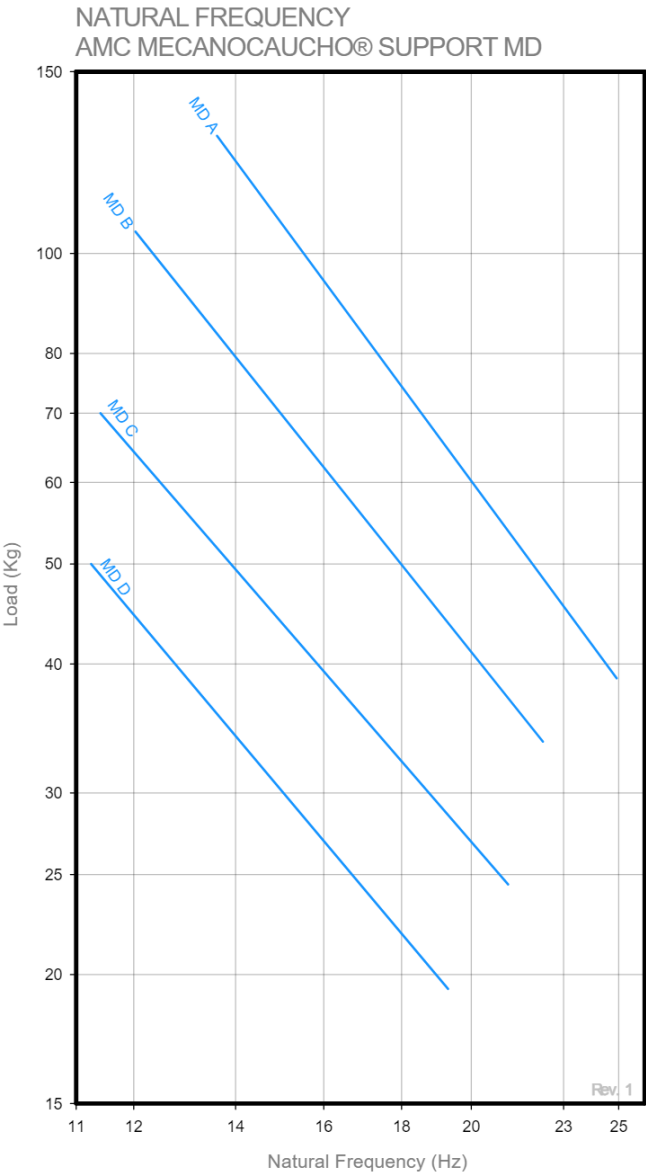

Technical characteristics

- The top metal cap protects the rubber section from possible deisel , oil splashes.
- It has an electrolytic coating that protects the metal parts against corrosion.
- The mounts have an interlocking metal component that provides fail-safe protection for mobile applications. This device limits vertical movement when the mounts are subjected to shock loads in transit .

