NF Adjustable Machine Mounts

Height-adjustable anti-vibration machine mounts with an oil-resistant NBR rubber pad, designed for installation without floor anchoring.



The **AMC-MECANOCAUCHO® NF Adjustable Machine Mounts** are designed to support and isolate **light and heavy industrial machinery where floor anchoring is not required**.

Their **height-adjustment system** allows the machine to be easily levelled while providing **elastic decoupling between the equipment and the floor**, helping to reduce the transmission of **vibration and structure-borne noise**.

NF mounts also incorporate a **tilting system** that allows them to accommodate **uneven or slightly inclined floors**, ensuring proper support of the machine.

The elastic element is manufactured from **nitrile butadiene rubber (NBR)**, providing **good resistance to oils** and making the mounts suitable for a wide range of industrial environments.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Drawings

NF-65 / NF-85 / NF-100 / NF-130 / NF-160 / NF-200 / NF-250

FIG. 1


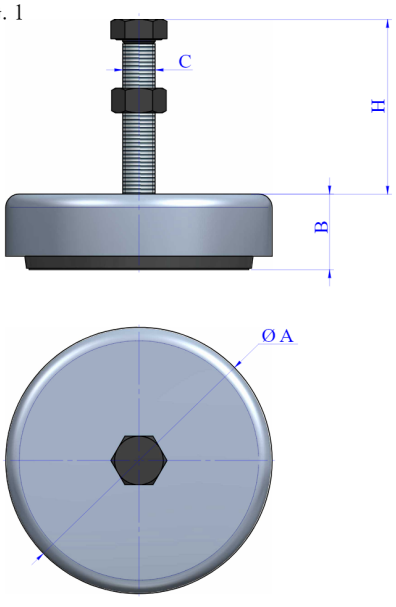


FIG. 2

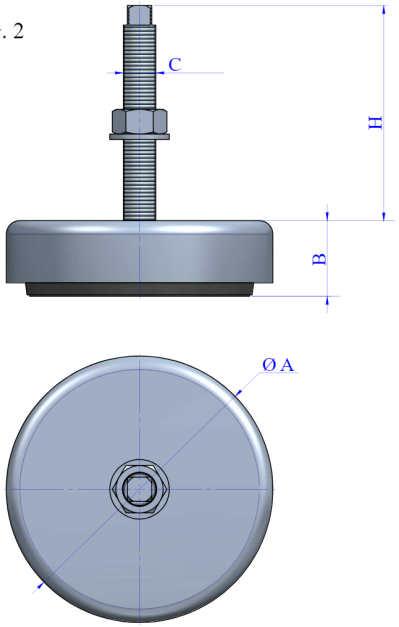

Type	Deflection(mm)	A(mm)	B Min.(mm)	B Max.(mm)	B (mm) Reglaje	Max. static load (Kg)	Weight(gr)	Code	C(mm)	H (mm) Min.	H (mm) Máx.	Fig.
NF-65	2	65	27	34	7	320	349	142001	M-12x1,75	105	110	1
								142017	M-12x1,75	78	85	2
NF-85	2	85	33	46	13	650	732	142002	M-16x2	114	127	1
								142018	M-16x2	82	95	2
NF-100	2	100	35	48	13	980	960	142003	M-16x2	120	130	1
								142019	M-16x2	82	95	2
NF-130	3	130	45	58	13	2500	1675	142004	M-20x2,5	130	140	1
								142023	M-16x1,5	67	80	2
								142028	M-16x1,5	99	112	2
NF-160	3	160	53	66	13	4000	3397	142005	M-20x2,5	130	140	1
								142024	M-20x1,5	62	75	2
								142026	M-20x1,5	135	145	2
NF-200	3	200	55	68	13	5000	4958	142006	M-24x3	158	176	1
NF-250	3	250	67	85	18	7000	8575	142007	M-30x2	94	117	2

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Mount offering high stability

Suspensions built with this mount barely move, thanks to a geometry designed to control the movement of the suspended element.

High protection against weathering and chemical contamination

The bell housing protects the rubber from ozone and UV radiation, while also preventing contact with diesel, oils or other chemicals that could damage it.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.