NGI Type M Machine Feet

Hygienic stainless steel levelling foot with FDA-compliant rubber and up to 5° articulation, designed for environments with high hygiene requirements.



The **AMC-MECANOCAUCHO® NGI Type M Machine Feet** are designed for **machinery and equipment subject to high hygiene and cleaning requirements**.

Manufactured from **stainless steel**, they feature a hygienic design with **smooth, rounded surfaces**, facilitating cleaning and minimising areas where residues may accumulate.

The base incorporates **FDA-compliant rubber**, providing stable contact with the floor. The **up to 5° articulation** compensates for minor floor slopes and irregularities whilst maintaining correct support of the machine.


Thanks to their **hygienic design, corrosion resistance and ease of cleaning**, NGI Type M machine feet are particularly suitable for **food processing machinery, pharmaceutical equipment and sanitary installations**.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Drawings

M-50 M-10X100 / M-50 M-12X100 / M-75 M-10X100 / M-75 M-12X100 / M-75 M-16X100 / M-75 M-16X150 / M-105 M-20X150 / M-100 M-12X150 / M-100 M-16X150 / M-100 M-20X150 / M-125 M-16X150 / M-125 M-20X150

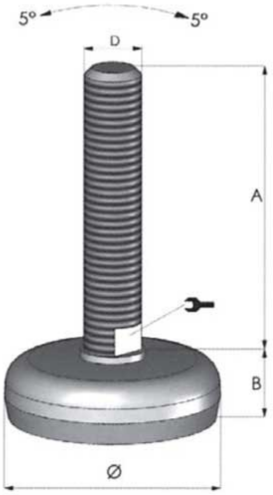

Type	Max. Load(kg)	A(mm)	B(mm)	D(mm)	Ø(mm)	Code	Weight(kg)
M-50 M-10X100	400	106	23	M-10	50	159001	0.148
M-50 M-12X100	400	106	23	M-12	50	159002	0.171
M-75 M-10X100	1000	106	24	M-10	75	159003	0.274
M-75 M-12X100	1000	106	24	M-12	75	159004	0.29
M-75 M-16X100	1000	106	24	M-16	75	159005	0.355
M-75 M-16X150	1000	147	24	M-16	75	159006	0.408
M-105 M-20X150	1200	147	32	M-20	105	159010	0.799
M-100 M-12X150	2200	147	34	M-12	100	159007	0.726
M-100 M-16X150	2200	147	34	M-16	100	159008	0.809
M-100 M-20X150	2200	147	34	M-20	100	159009	0.911
M-125 M-16X150	3000	147	39	M-16	125	159011	1.135
M-125 M-20X150	3000	147	39	M-20	125	159012	1.245

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Technical characteristics

The rubber compound is approved for food industry by the FDA.

Maximum inclination 5 degrees.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Superior corrosion protection

The metal parts of this anti-vibration mount are made of stainless steel to prevent corrosion in the most demanding environments.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.