


PD BEIGE

Acoustic absorption panel with a smooth beige film finish. Good mid- and high-frequency absorption with a technical finish for clean and visible applications.

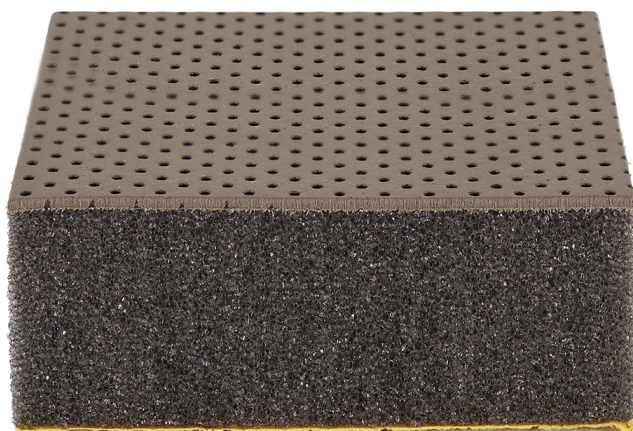

The **AKUSTIKABSORBER PD BEIGE** range consists of acoustic absorption panels made from **open-cell polyurethane foam**, designed to provide **good sound absorption at mid and high frequencies**, reducing reverberation and improving acoustic comfort in enclosed spaces. The panel features a **smooth beige PVC film facing**, which protects the foam against **dust, splashes and light mechanical contact**.

The **acoustically permeable film** allows sound waves to reach the absorbent foam whilst providing a uniform, clean and technical surface. Its light beige finish makes it particularly suitable for **visible installations, electrical cabinets, machinery enclosures, control cabinets and technical rooms**, where a neat and professional appearance is required.

Thanks to its **low weight, ease of installation and availability in different thicknesses**, PD BEIGE provides a versatile option for a wide range of **acoustic treatment applications** where no specific fire performance is required.

Drawings

PD-15 sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PD-15 sheet	26003	-	10	1,113

PD-15 A sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PD-15 A sheet	26071	✓	10	1,113

PD-15 roll

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PD-15 roll	26011	-	10	1,113

PD-25 sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PD-25 sheet	26006	-	8	1,415

PD-25 A sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PD-25 A sheet	26072	✓	8	1,415

PD-25 roll

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PD-25 roll	26013	-	8	1,415

PD-40 sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PD-40 sheet	26009	-	18	1,868

PD-40 A sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PD-40 A sheet	26073	✓	18	1,868

PD-40 roll

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PD-40 roll	26015	-	18	1,868





AMC MECANOCAUCHO
 Industrialdea Zona A - Pab. 35.
 Asteasu E-20159, Gipuzkoa
 Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

Elastic properties

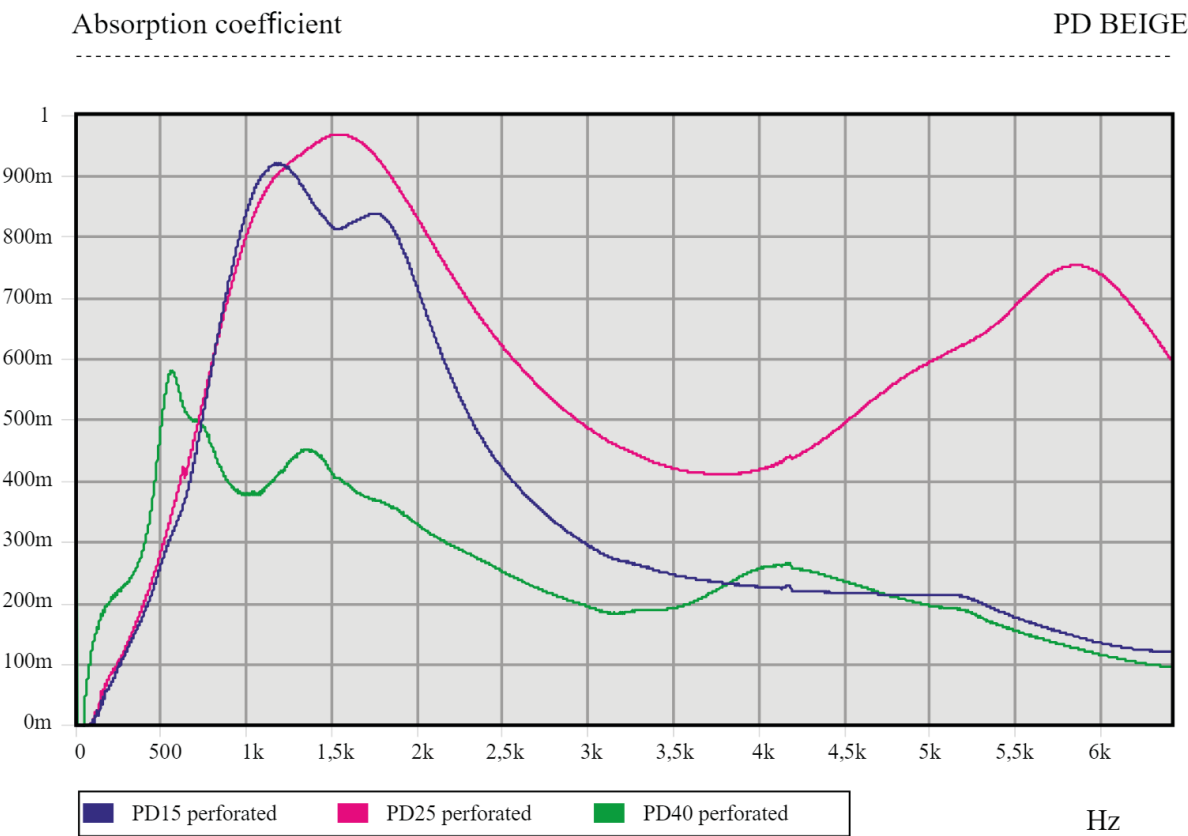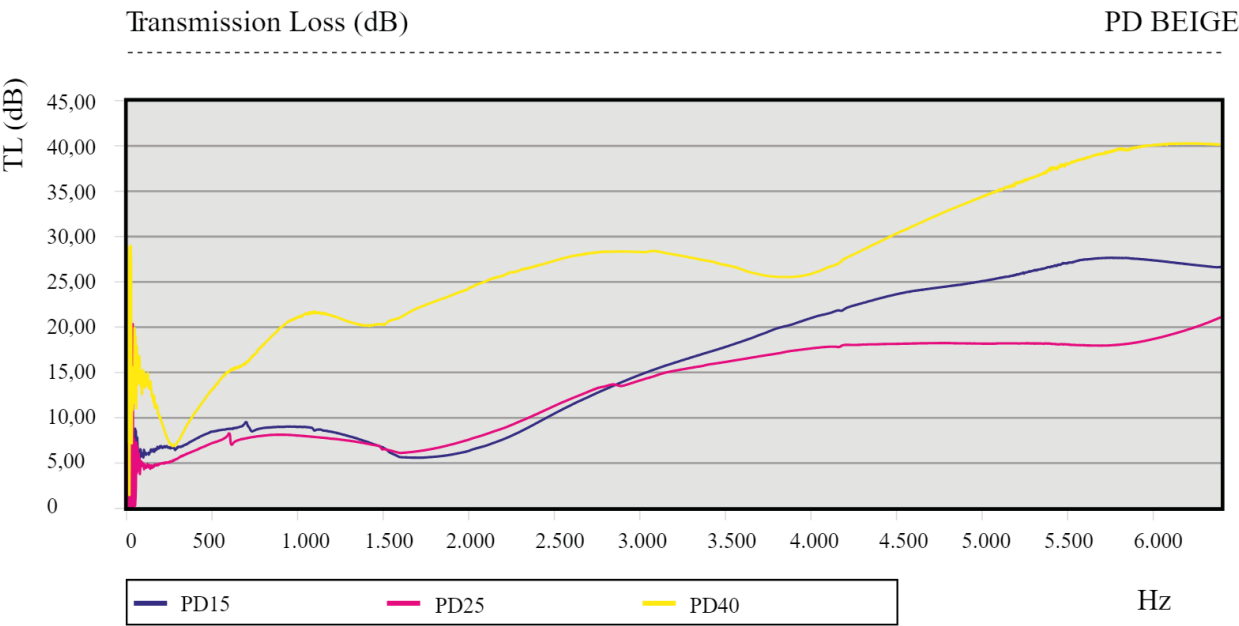

Technical characteristics

- Composition Perforated beige coloured PVC facing and absorbing polyurethane foam.
- Thicknesses 15mm 25mm 40mm

Formats

- Sheets 1200x1000 mm
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.
40mm thick, 3 Sheets per box.
- Rolls 15mm thick, 1500mm wide x approx. 25m long
25mm thick, 1500mm wide x approx. 25m long
40mm thick, 1500mm wide x approx. 20m long



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13



sales@amcsa.es



www.mecanocaucho.com