


PD CREAM

Acoustic absorption panel made from PU foam with a smooth cream PVC film. Good sound absorption and a clean finish for technical environments without specific fire requirements.

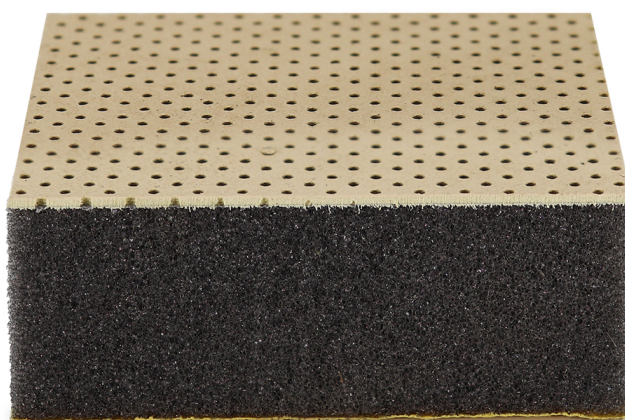

The **AKUSTIKABSORBER PD CREAM** is an acoustic absorption panel designed to **reduce reverberation and reflected sound** inside machinery, electrical cabinets, technical enclosures, and industrial spaces. It consists of **open-cell polyurethane foam** with a **smooth cream PVC film facing**, providing a bright, clean, and professional appearance.

The **acoustically permeable cream PVC film** allows sound waves to reach the absorbent foam while protecting the panel against **dust, light moisture, and minor mechanical contact**. Its surface also facilitates cleaning. The light color makes it particularly suitable for environments where a **bright and neat finish** is required without compromising acoustic performance.

PD CREAM is intended for **environments without specific fire performance requirements** and can be installed using technical adhesive or mechanical fasteners. It is particularly suitable for **machinery enclosures, technical cabinets, machine interiors, and visible enclosures** where a clean and discreet acoustic finish is required.

Drawings

PD-15 white sheet

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-15 white sheet	26075	-	10	2

PD-15 A white sheet

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-15 A white sheet	26078	✓	10	2

PD-15 roll white

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-15 roll white	26081	-	10	2

PD-25 white sheet

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-25 white sheet	26076	-	8	3

PD-25 A white sheet

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-25 A white sheet	26079	✓	8	3

PD-25 roll white

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-25 roll white	26082	-	8	3

PD-40 white sheet

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-40 white sheet	26077	-	18	4



PD-40 A white sheet

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-40 A white sheet	26080	✓	18	4

PD-40 roll white

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-40 roll white	26083	-	18	4

Elastic properties

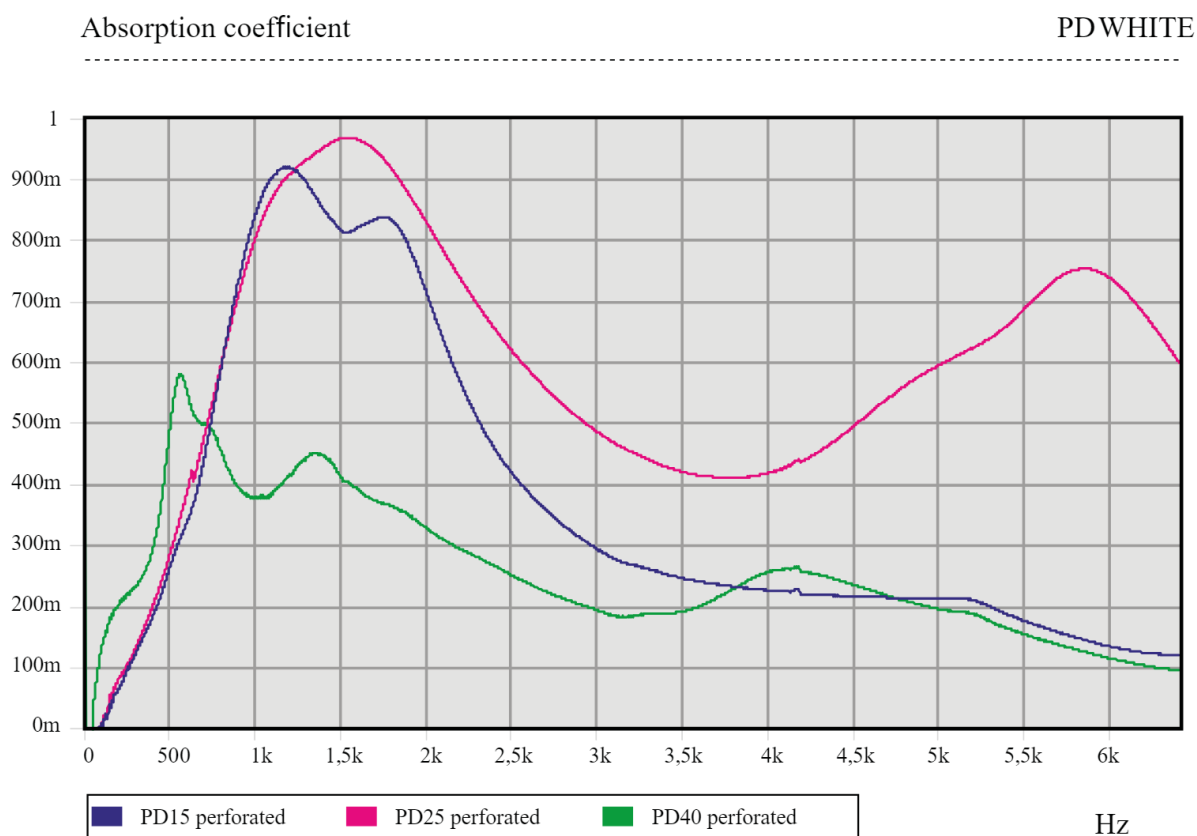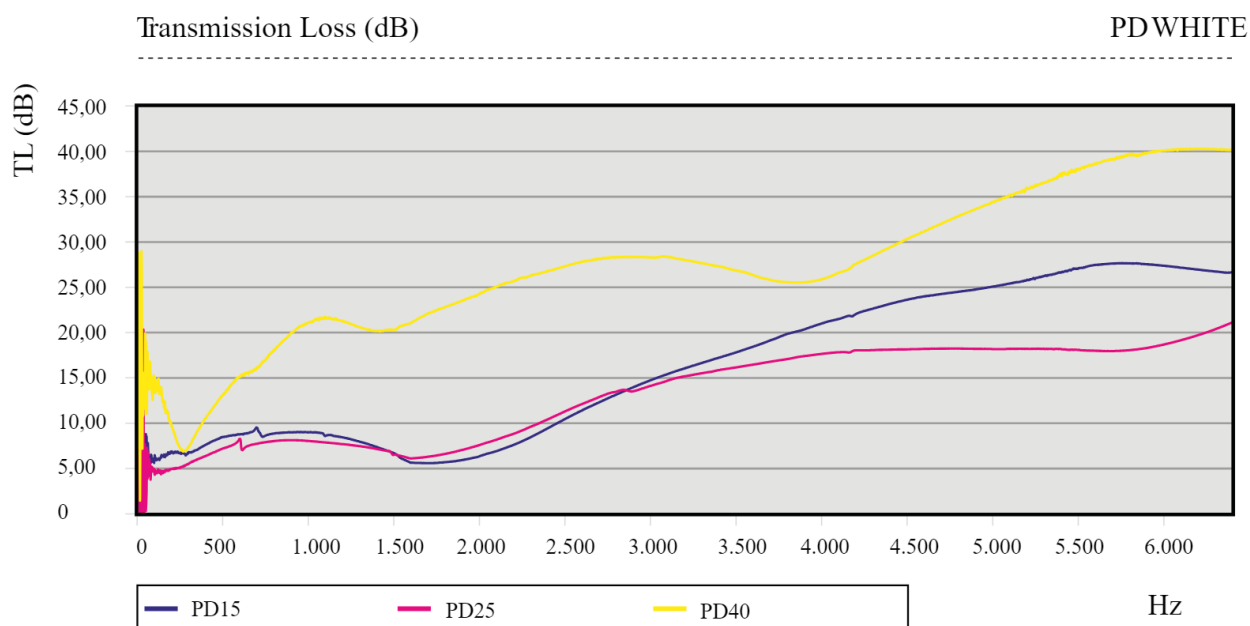

Technical characteristics

- Composition Perforated white coloured PVC facing and absorbing polyurethane foam.
- Thicknesses 15mm 25mm 40mm

Formats

- Sheets 1200x1000 mm
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.
40mm thick, 3 Sheets per box.

15mm thick, 1500mm wide x approx. 25m long

25mm thick, 1500mm wide x approx. 25m long

40mm thick, 1500mm wide x approx. 20m long