
PD CREAM

Acoustic absorption panel made from PU foam with a smooth cream PVC film. Good sound absorption and a clean finish for technical environments without specific fire requirements.

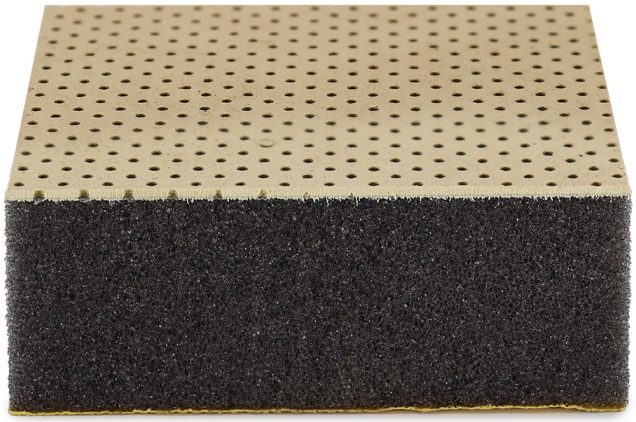

The **AKUSTIKABSORBER PD CREAM** is an acoustic absorption panel designed to **reduce reverberation and reflected sound** inside machinery, electrical cabinets, technical enclosures, and industrial spaces. It consists of **open-cell polyurethane foam** with a **smooth cream PVC film facing**, providing a bright, clean, and professional appearance.

The **acoustically permeable cream PVC film** allows sound waves to reach the absorbent foam while protecting the panel against **dust, light moisture, and minor mechanical contact**. Its surface also facilitates cleaning. The light color makes it particularly suitable for environments where a **bright and neat finish** is required without compromising acoustic performance.

PD CREAM is intended for **environments without specific fire performance requirements** and can be installed using technical adhesive or mechanical fasteners. It is particularly suitable for **machinery enclosures, technical cabinets, machine interiors, and visible enclosures** where a clean and discreet acoustic finish is required.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Drawings

PD-15 white sheet

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-15 white sheet	26075	-	10	2

PD-15 A white sheet

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-15 A white sheet	26078	✓	10	2

PD-15 roll white

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-15 roll white	26081	-	10	2

PD-25 white sheet

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-25 white sheet	26076	-	8	3

PD-25 A white sheet

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-25 A white sheet	26079	✓	8	3

PD-25 roll white

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-25 roll white	26082	-	8	3

PD-40 white sheet

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-40 white sheet	26077	-	18	4


PD-40 A white sheet


Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-40 A white sheet	26080	✓	18	4

PD-40 roll white

Type	Code	Self-adhesive	Rw(dB)	Weight /m2 (lbs)
PD-40 roll white	26083	-	18	4

Elastic properties

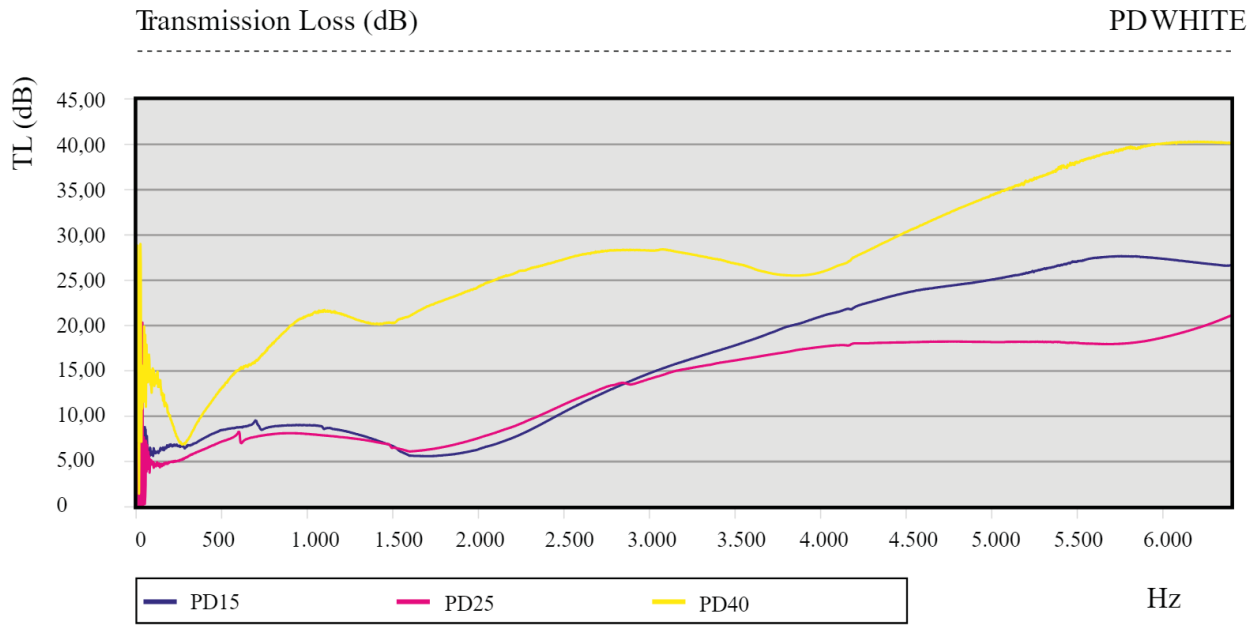

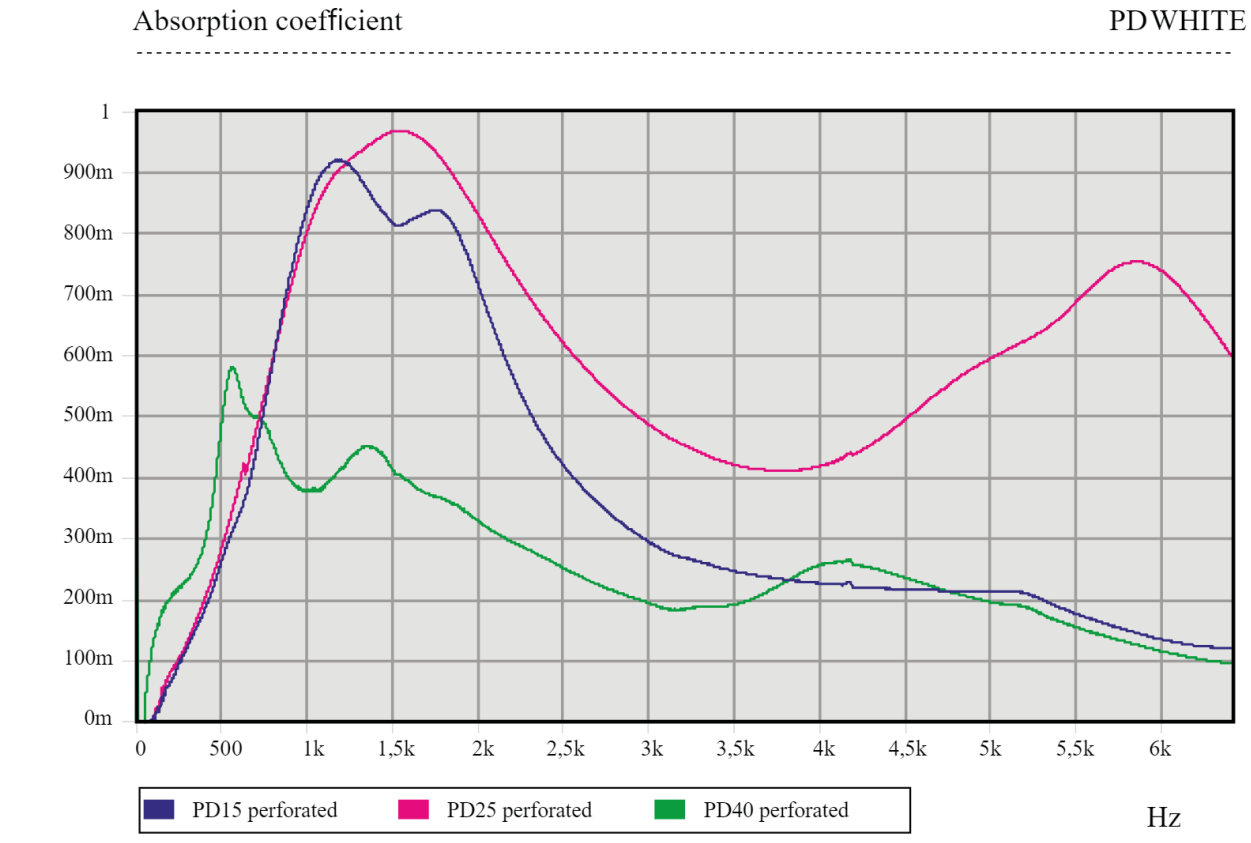

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Technical characteristics

- CompositionPerforated white coloured PVC facing and absorbing polyurethane foam.
- Thicknesses15mm 25mm 40mm

Formats

- Sheets1200x1000 mm
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.
40mm thick, 3 Sheets per box.

15mm thick,1500mm wide x approx. 25m long
25mm thick,1500mm wide x approx. 25m long
40mm thick,1500mm wide x approx. 20m long

Advantages

High absorption capacity

This material is highly porous and, thanks to its high absorption capacity, reduces reflections and reverberation time in enclosed spaces.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.