
PF BLACK

Acoustic absorption panel made from PU foam with a black polyester fibre facing. Good sound absorption and a technical finish for visible applications without specific fire requirements.

Description

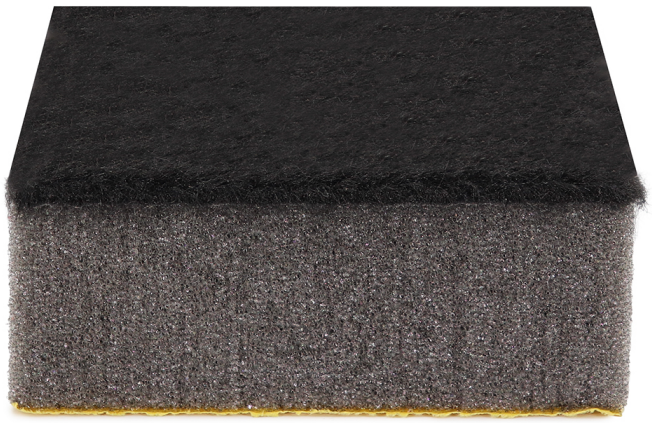

The **AKUSTIKABSORBER PF BLACK** is an acoustic absorption panel designed to **reduce reverberation and improve acoustic comfort** in technical spaces, machinery and enclosures, whilst providing a **durable, discreet and visually clean finish**. It consists of **open-cell polyurethane foam** covered with a **black non-woven polyester fibre facing**, which allows sound waves to reach the absorbent core.

The black textile facing provides **light protection against dust and dirt**, as well as improved resistance to surface wear caused by minor rubbing or contact. Its dark and uniform appearance makes it particularly suitable for **visible machinery enclosures, electrical cabinets, technical cabins, suspended ceilings and machine housings**, where a discreet appearance is required.

PF BLACK does not provide specific fire-resistant properties and is therefore recommended for **environments without particular fire performance requirements**, where a good balance between **sound absorption, appearance and surface durability** is required.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Drawings

PF-15 roll

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PF-15 roll	26160	-	11	0,463

PF-15 A roll

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PF-15 A roll	26163	✓	11	0,49

PF-25 roll

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PF-25 roll	26161	-	12	0,765

PF-25 A roll

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PF-25 A roll	26164	✓	12	0,81

PF-40 roll

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PF-40 roll	26162	-	11	1,218

PF-40 A roll

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PF-40 A roll	26165	✓	11	1,218

PF-15 A sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PF-15 A sheet	26291	✓	11	0,463

PF-25 A sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PF-25 A sheet	26292	✓	12	0,715

PF-40 A sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PF-40 A sheet	26193	✓	11	1,218

PF-15 sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PF-15 sheet	26166	-	11	0,463

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

PF-25 sheet

Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PF-25 sheet	26167	-	12	0,715


PF-40 sheet


Type	Code	Self-adhesive	Rw(dB)	Weight/m2 (kg)
PF-40 sheet	26168	-	11	1,218

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Elastic properties

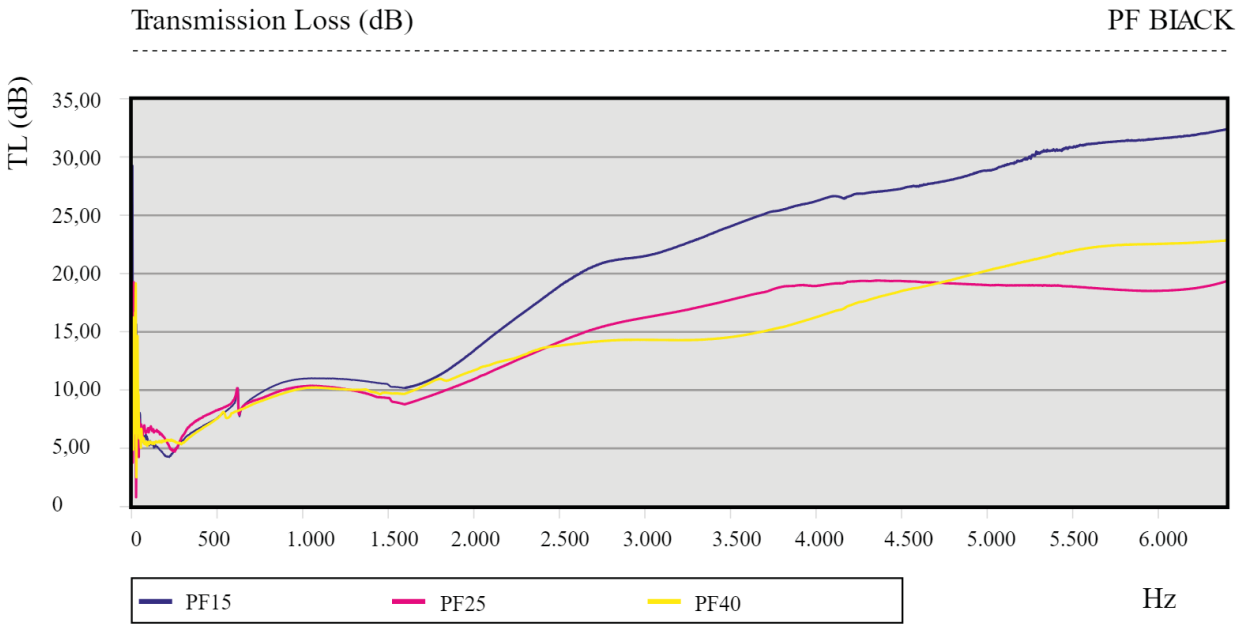

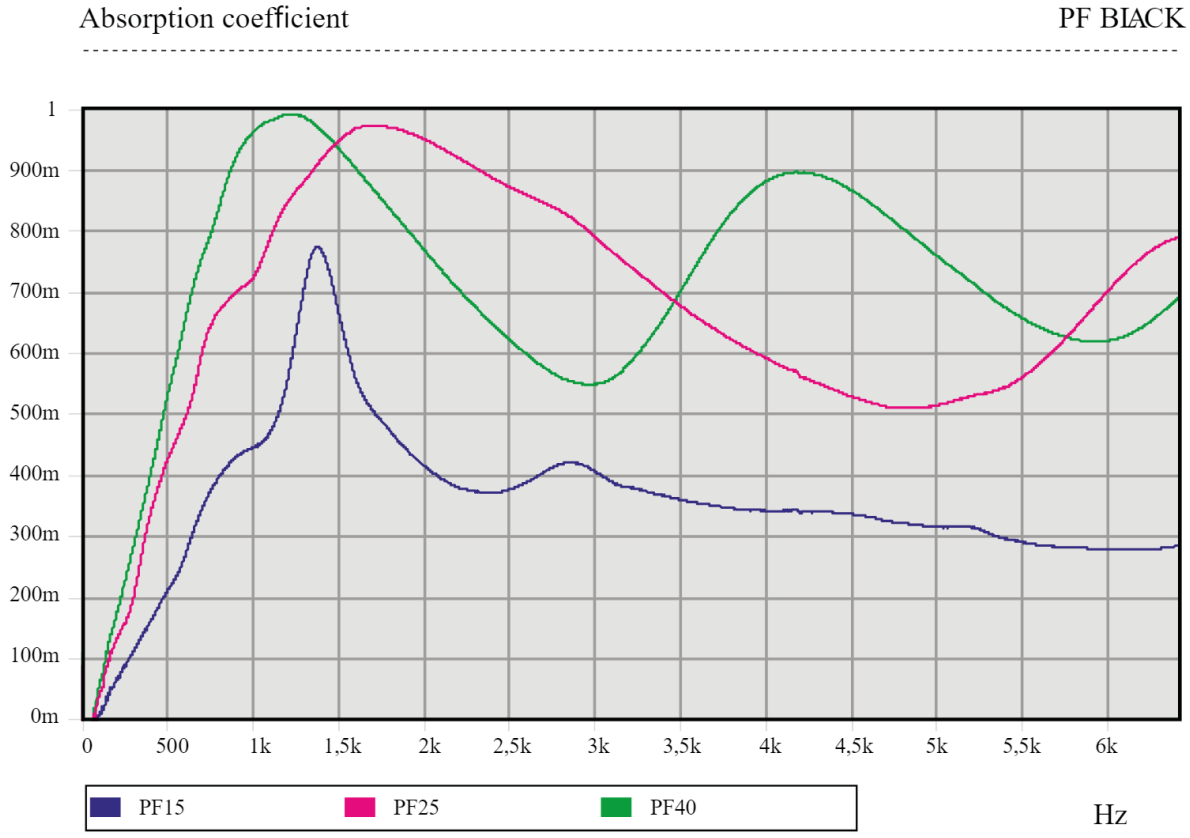

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Technical characteristics

- CompositionBlack unwoven fabric and absorbing polyurethane foam.
- Thicknesses15mm 25mm 40mm

Formats

- Sheets1200x1000 mm
15mm thick, 8 Sheets per box.
25mm thick, 5 Sheets per box.
40mm thick, 3 Sheets per box.
- Rolls1500mm wide x approx. 20m long

Advantages

High absorption capacity

This material is highly porous and, thanks to its high absorption capacity, reduces reflections and reverberation time in enclosed spaces.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.