

Articulated Polyamide Levelling Feet

Articulated levelling foot with glass-fibre reinforced polyamide base and steel or stainless steel stem, designed to accommodate sloping or uneven floors.



The **AMC-MECANOCAUCHO® Articulated Polyamide Levelling Feet** are designed to provide **stable levelling for machinery and equipment**, particularly where floors have minor slopes or irregularities.

The **glass-fibre reinforced polyamide base** combines low weight, mechanical strength and durability. The stem is available in **steel or stainless steel** to suit different operating conditions.

Thanks to the **articulated joint**, the base can accommodate floor inclination whilst maintaining correct contact with the supporting surface. This design facilitates levelling and contributes to **equipment stability**.

These feet are particularly suitable for **industrial machinery, conveyors, production equipment and structures** requiring simple levelling on sloping or uneven surfaces.

Drawings

STEEL / STAINLESS STEEL

FIG. 1


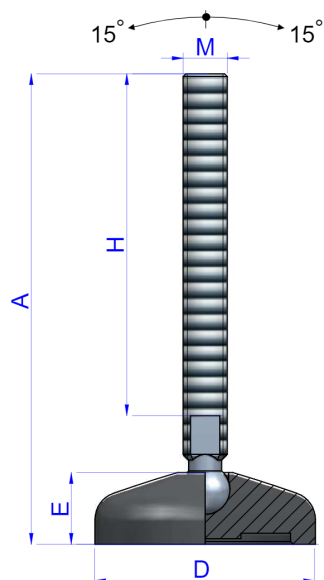


FIG. 2

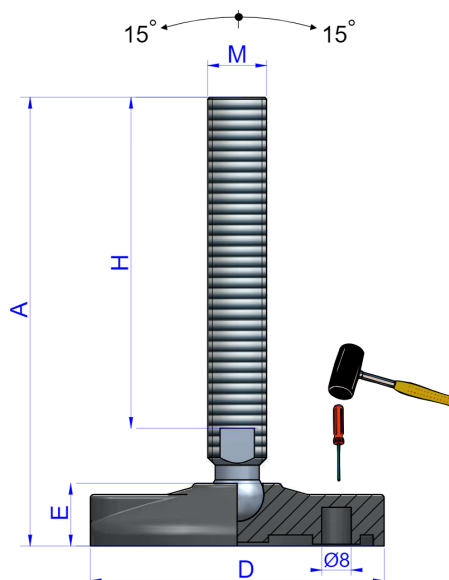

Type	Code	Max. Load(kg)	A(mm)	D(mm)	E(mm)	H(mm)	M	Weight(kg)	Fig.
STEEL	159521	1000	90	40	13	65	M8x65	0.039	1
	159522	1100	97	40	13	70	M10x70	0.051	1
	159523	1200	97	50	13	70	M10x70	0.055	1
	159524	1300	107	50	13	77	M12x77	0.079	1
	159525	1500	127	60	17	91	M14x91	0.128	1
	159526	1700	98	60	17	60	M16x60	0.13	1
	159527	1700	143	60	17	105	M16x105	0.185	1
	159528	1900	130	80	17	90	M16x90	0.178	2
	159529	1900	195	80	17	155	M16x155	0.26	2
	159530	2100	160	80	17	116	M20x116	0.33	2
	159531	2200	168	102	20	125	M16x125	0.26	2
	159532	2400	162	102	20	116	M20x116	0.35	2
	159533	2700	192	124	24	141	M20x141	0.46	2
	159534	2900	203	124	24	152	M24x152	0.65	2
STAINLESS STEEL	159541	1200	97	50	13	70	M10x70	0.055	1
	159542	1300	92	50	13	63	M12x63	0.07	1
	159543	1700	98	60	17	60	M16x60	0.13	1
	159544	1900	130	80	17	90	M16x90	0.178	2
	159545	1900	165	80	17	125	M16x125	0.22	2
	159546	2400	163	102	20	116	M20x116	0.36	2