Articulated Polyamide Levelling Feet

Articulated levelling foot with glass-fibre reinforced polyamide base and steel or stainless steel stem, designed to accommodate sloping or uneven floors.



The **AMC-MECANOCAUCHO® Articulated Polyamide Levelling Feet** are designed to provide **stable levelling for machinery and equipment**, particularly where floors have minor slopes or irregularities.

The **glass-fibre reinforced polyamide base** combines low weight, mechanical strength and durability. The stem is available in **steel or stainless steel** to suit different operating conditions.

Thanks to the **articulated joint**, the base can accommodate floor inclination whilst maintaining correct contact with the supporting surface. This design facilitates levelling and contributes to **equipment stability**.

These feet are particularly suitable for **industrial machinery, conveyors, production equipment and structures** requiring simple levelling on sloping or uneven surfaces.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Drawings

STEEL / STAINLESS STEEL

FIG. 1


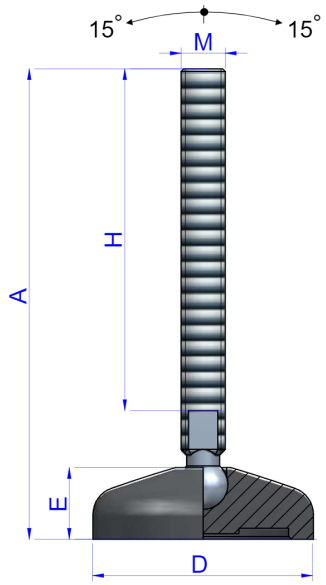


FIG. 2

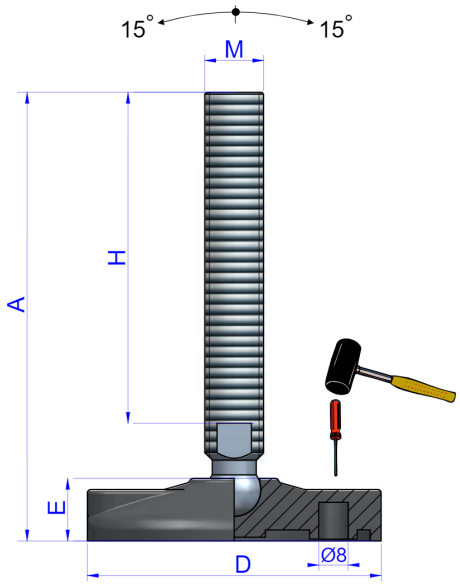

Type	Code	Max. Load(kg)	A(mm)	D(mm)	E(mm)	H(mm)	M	Weight(kg)	Fig.
STEEL	159521	1000	90	40	13	65	M8x65	0.035	1
	159522	1100	97	40	13	70	M10x70	0.05	1
	159523	1200	97	50	13	70	M10x70	0.055	1
	159524	1300	107	50	13	77	M12x77	0.079	1
	159525	1500	127	60	17	91	M14x91	0.128	1
	159526	1700	98	60	17	60	M16x60	0.13	1
	159527	1700	143	60	17	105	M16x105	0.185	1
	159528	1900	130	80	17	90	M16x90	0.175	2
	159529	1900	195	80	17	155	M16x155	0.26	2
	159530	2100	160	80	17	116	M20x116	0.33	2
	159531	2200	168	102	20	125	M16x125	0.257	2
	159532	2400	162	102	20	116	M20x116	0.35	2
	159533	2700	192	124	24	141	M20x141	0.46	2
	159534	2900	203	124	24	152	M24x152	0.65	2
STAINLESS STEEL	159541	1200	97	50	13	70	M10x70	0.055	1
	159542	1300	92	50	13	63	M12x63	0.07	1
	159543	1700	98	60	17	60	M16x60	0.13	1
	159544	1900	130	80	17	90	M16x90	0.176	2
	159545	1900	165	80	17	125	M16x125	0.22	2
	159546	2400	163	102	20	116	M20x116	0.36	2

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.