

Articulating Polyamide Leveling Feet

Articulating leveling foot with glass-fiber reinforced polyamide base and steel or stainless steel stem, designed to accommodate sloped or uneven floors.



The **AMC-MECANOCAUCHO® Articulating Polyamide Leveling Feet** are designed to provide **stable support and accurate leveling for machinery and equipment**, including installations on slightly sloped or uneven surfaces.

The base is manufactured from **glass-fiber reinforced polyamide**, providing an excellent combination of **low weight, mechanical strength, and durability**. Depending on the configuration, the stem is available in **steel or stainless steel**.

Thanks to their **articulating joint**, these feet can adapt to the slope of the floor while maintaining proper support beneath the machine. This design facilitates installation and improves equipment stability where the floor is not perfectly level.

They are particularly suitable for **industrial machinery, conveyors, production equipment, structures, and other installations requiring leveling on uneven surfaces**.

Drawings

STEEL / STAINLESS STEEL

FIG. 1


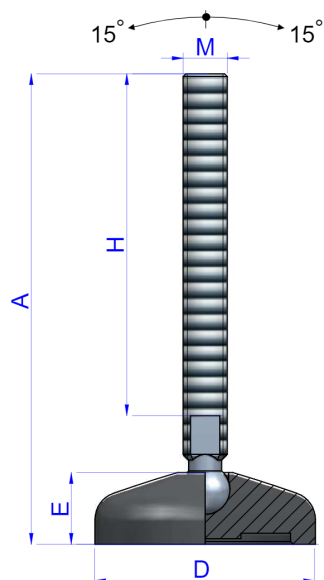


FIG. 2

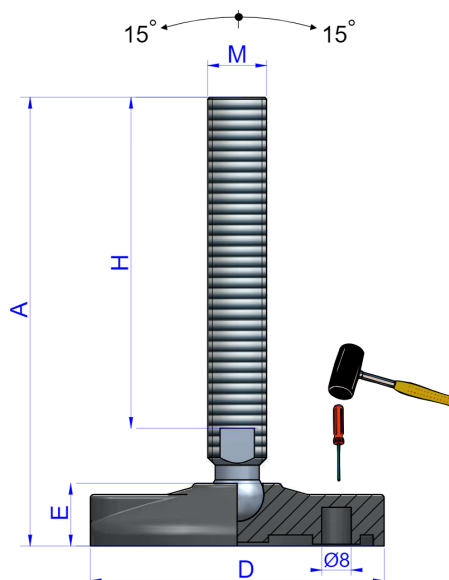

Type	Code	Max. Load(lbs)	A(in)	D(in)	E(in)	H(in)	M	Weight(lbs)	Fig.
STEEL	159521	2204	3.54	1.57	0.51	2.56	M8x65	0.09	1
	159522	2424	3.82	1.57	0.51	2.76	M10x70	0.11	1
	159523	2645	3.82	1.97	0.51	2.76	M10x70	0.12	1
	159524	2865	4.21	1.97	0.51	3.03	M12x77	0.17	1
	159525	3306	5	2.36	0.67	3.58	M14x91	0.28	1
	159526	3747	3.86	2.36	0.67	2.36	M16x60	0.29	1
	159527	3747	5.63	2.36	0.67	4.13	M16x105	0.41	1
	159528	4188	5.12	3.15	0.67	3.54	M16x90	0.39	2
	159529	4188	7.68	3.15	0.67	6.1	M16x155	1	2
	159530	4628	6.3	3.15	0.67	4.57	M20x116	1	2
	159531	4849	6.61	4.02	0.79	4.92	M16x125	1	2
	159532	5290	6.38	4.02	0.79	4.57	M20x116	1	2
	159533	5951	7.56	4.88	0.94	5.55	M20x141	1	2
	159534	6392	7.99	4.88	0.94	5.98	M24x152	1	2
STAINLESS STEEL	159541	2645	3.82	1.97	0.51	2.76	M10x70	0.12	1
	159542	2865	3.62	1.97	0.51	2.48	M12x63	0.15	1
	159543	3747	3.86	2.36	0.67	2.36	M16x60	0.29	1
	159544	4188	5.12	3.15	0.67	3.54	M16x90	0.39	2
	159545	4188	6.5	3.15	0.67	4.92	M16x125	0.48	2
	159546	5290	6.42	4.02	0.79	4.57	M20x116	1	2