Type C Progressive Buffers

Progressive rubber buffers with female fixing, designed to progressively absorb shocks, limit travel and reduce forces transmitted to the structure.



The **AMC-MECANOCAUCHO® Type C Progressive Buffers** are elastic rubber elements designed to **absorb shocks and limit the travel of moving parts** progressively.

Their **conical geometry** increases the contact area as the rubber deforms. As a result, **stiffness progressively increases with compression**, allowing a significant amount of energy to be absorbed while avoiding an excessively abrupt response to impact.

Compared with a rigid stop, this progressive deformation helps to **reduce forces transmitted to the structure, shocks and noise**, while providing effective motion control at the end of travel.


Equipped with a **female fixing**, Type C Progressive Buffers are particularly suitable for **industrial machinery, mobile equipment, doors and mechanisms subjected to repeated impacts** or requiring progressive energy absorption.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Drawings

T-25 / T-30xM6 / T-30xM8 / T-50x50 / T30x36 / T-50x58 / T-50x64 / T-70

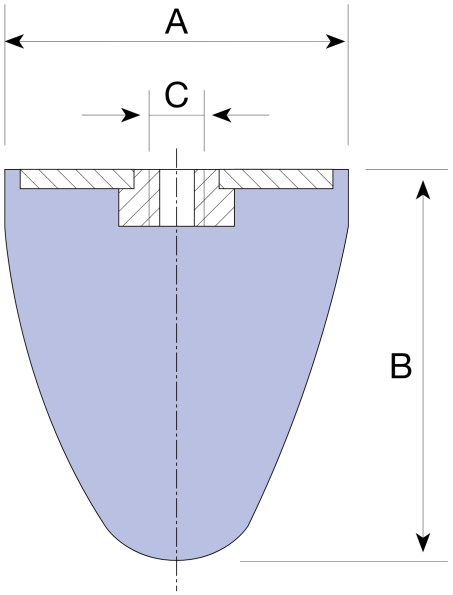


Type	Code	Max. Load(kg)	A(mm)	B(mm)	C(mm)	Weight(kg)	Energy(Nm)	Dynamic Deflection (mm)
T-25	115008	100	25	19	M-8	0.02	3	8
T-30xM6	115009	140	30	30	M-6	0.023	6	15
T-30xM8	113129	140	30	30	M-8	0.025	6	15
T-50x50	115010	340	50	50	M-8	0.104	30	25
T30x36	115034	140	30	36	M-8	0.027	12	13
T-50x58	115012	400	50	58	M-8	0.114	37	28
T-50x64	115011	370	50	64	M-8	0.134	40	32
T-70	115014	550	72	58	M-12	0.21	50	26

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com


In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

T - 85

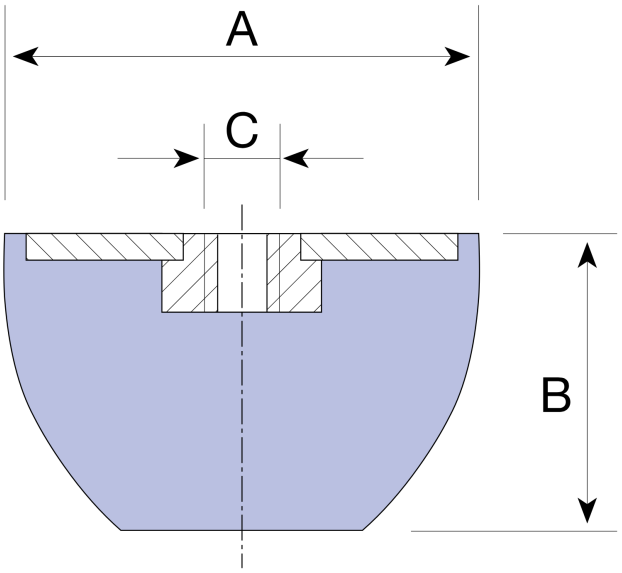

Type	Code	Max. Load(kg)	A(mm)	B(mm)	C(mm)	Weight(kg)	Energy(Nm)	Dynamic Deflection (mm)
T - 85	116011	1500	84	52	M-12	0.315	200	20

T-95

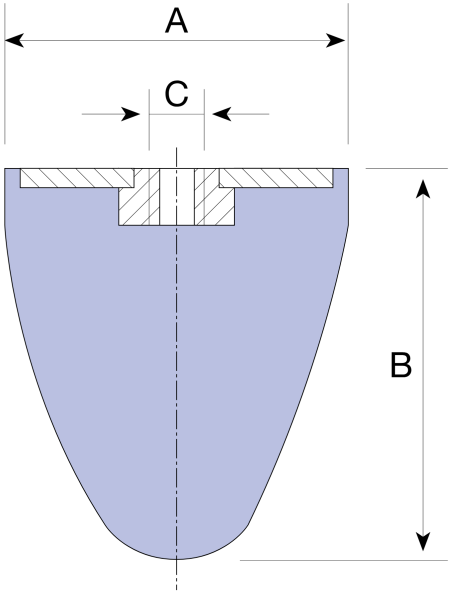


Type	Code	Max. Load(kg)	A(mm)	B(mm)	C(mm)	Weight(kg)	Energy(Nm)	Dynamic Deflection (mm)
T-95	115015	1100	94	80	M-16	0.497	120	37

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

T -120 / T - 220

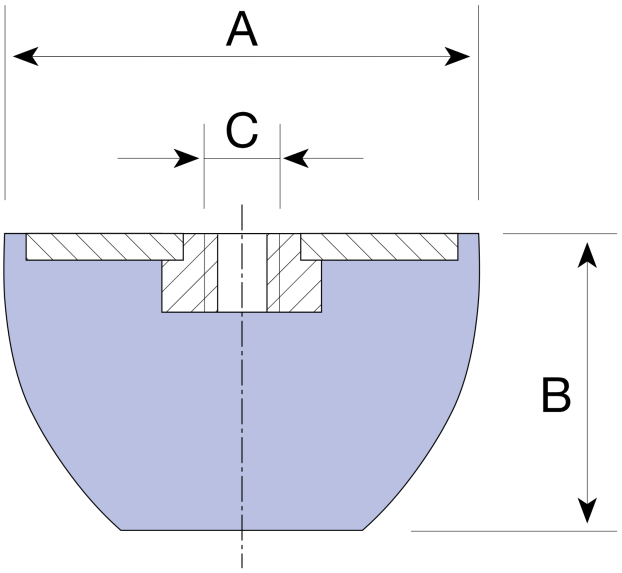

Type	Code	Max. Load(kg)	A(mm)	B(mm)	C(mm)	Weight(kg)	Energy(Nm)	Dynamic Deflection (mm)
T -120	116012	3000	120	75	M-16	0.903	340	22
T - 220	116013	15000	220	137	M-24	6.68	2500	40

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 16/11/2026.

Technical characteristics

These buffers are made with a rubber compound permitting major deformations under impact with notable absorption of energy. They can be made with high-damping rubber to order, however , absorption of energy inhigh damped compounds is performed with reduced rebound movement and with slightly higher transfer levels of stress to the structure .

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Improved isolation

It offers improved isolation compared with conventional anti-vibration mounts of similar geometry.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.