

PS +Sylomer® 1 AMC Preload

support with pre-compression system and Sylomer® base.
Installation without lifting the equipment for effective isolation in confined spaces.




The new Vibrabsorber PS+Sylomer® are spring mounts for anti-vibration purposes that have the capability to be pre-loaded. Thanks to the design of their metal parts, the Vibrabsorber PS+Sylomer® spring-mounts allow to add a pre stress on the anti-vibration mount.

The AMC-MECANOCAUCHO® type **Vibrabsorber PS+Sylomer®** are ideal for stationary applications where the anti-vibration mount must not exceed a certain height either for the installation or during the maintenance of the machine when liquids are extracted and the mount must not exceed a certain height. Thanks to their low stiffness, they are often used on applications where a high isolation degree is required at low disturbing frequencies (600 to 1000 rpm).


Drawings

1 AMC 150 / 1 AMC 200 / 1 AMC 250 / 1 AMC 350 / 1 AMC 500 / 1 AMC 750

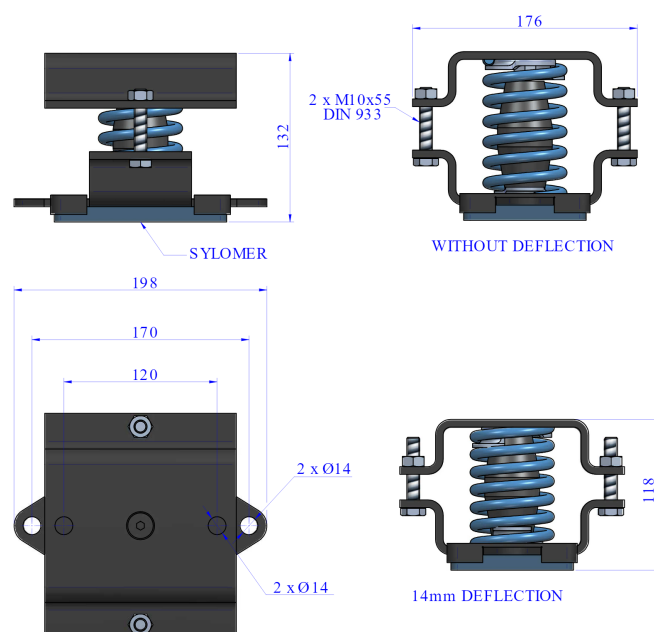

Type	Spring color	Max. Load(kg)	Code	K(N/mm)	Weight(kg)
1 AMC 150	BLUE	150	20522	52	1.138
1 AMC 200	WHITE	200	20523	66	1.138
1 AMC 250	BLACK	250	20524	83	1.138
1 AMC 350	CREAM	350	20525	114	1.138
1 AMC 500	LIGHT GREY	500	20526	268	4.7
1 AMC 750	GREEN	750	20527	407	5.07

Elastic properties

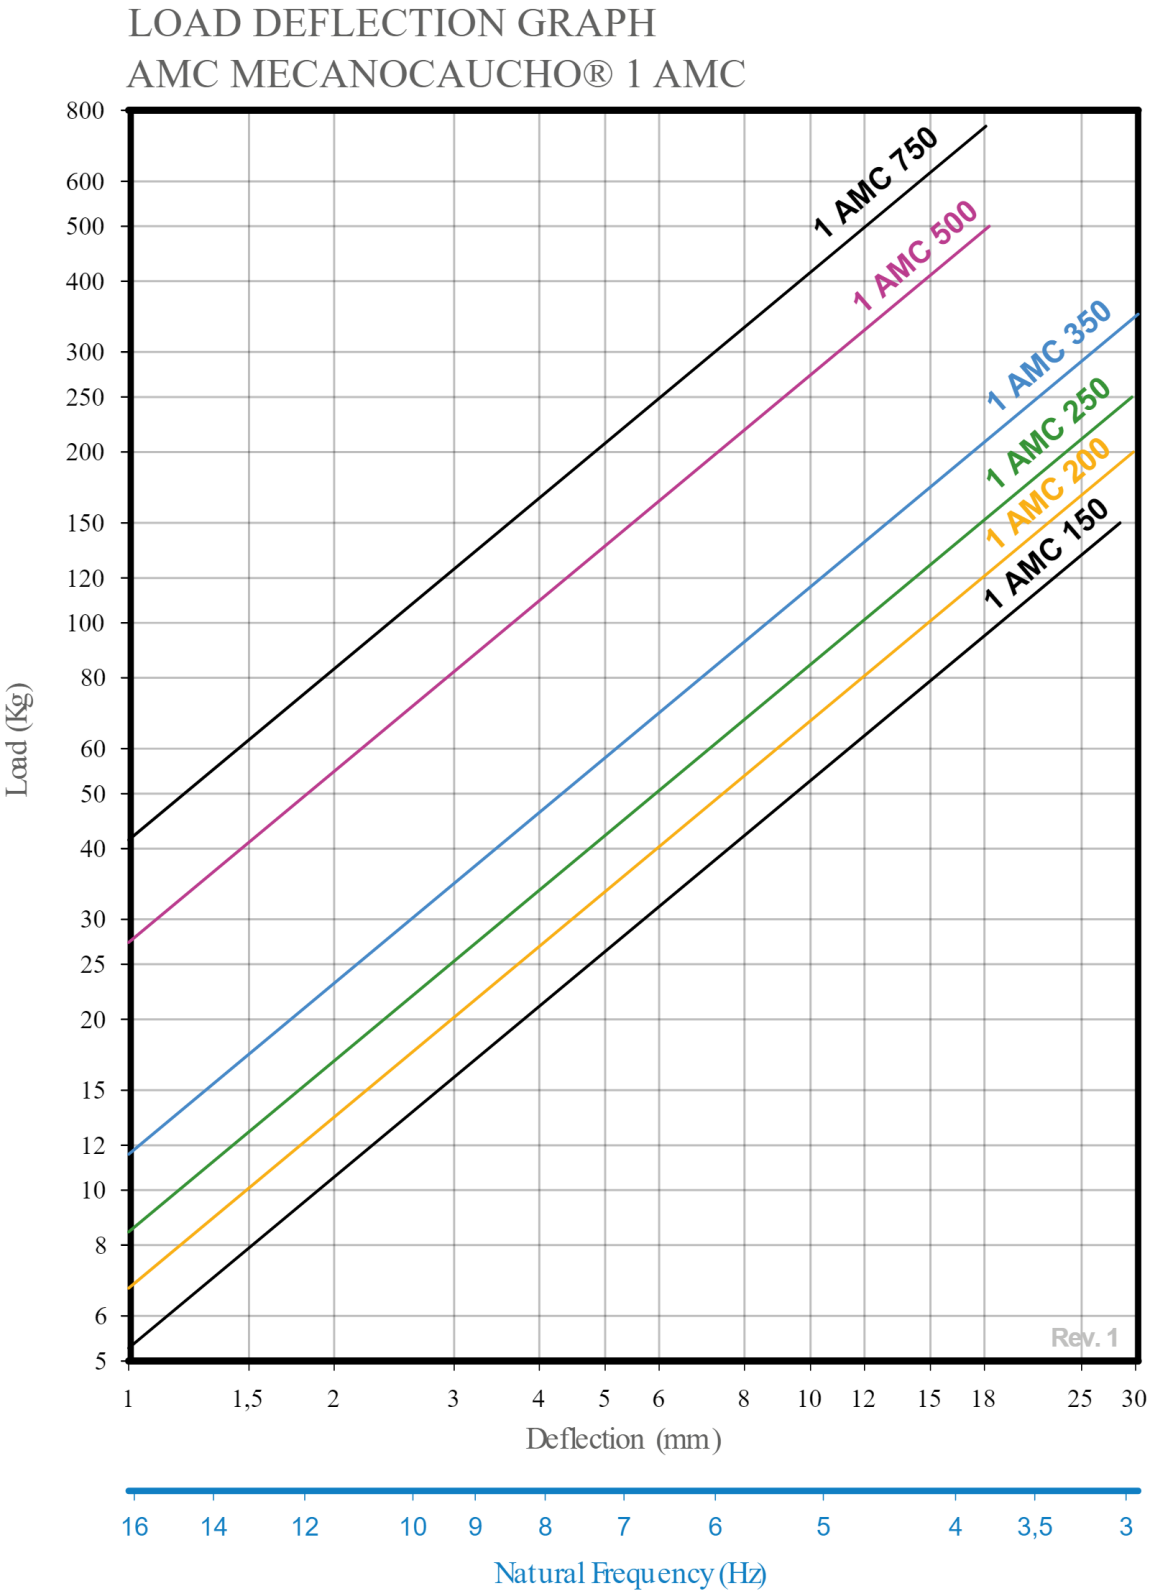

Technical characteristics

The design of these **anti vibration mounts** is composed of metal parts in omega shape that allow a preload of the mount. This is often necessary on HVAC equipment that is connected to piping and the mount must not raise during the maintenance, due to the extraction of liquids. For some cases when the spring mount must be inserted or slid on a gap, this feature is interesting for the assembly.

These mounts are equipped of Sylomer® pad for the isolation of high frequencies that may go through the coil springs.

The elastic properties remain the same as the actual range of our **Vibrabsorber spring mounts**. The load range of these mounts is from 50 to 750Kg per **anti-vibration mount**.

The metal parts are epoxy coated in order to withstand to arduous corrosive environments.