

PS +Sylomer® 2 AMC Preload

Spring support with pre-compression system and Sylomer® base. Installation without lifting the machine. Ideal for tight spaces or complex maintenance.




The new Vibrabsorber PS+Sylomer® are spring mounts for anti-vibration purposes that have the capability to be pre-loaded. Thanks to the design of their metal parts, the Vibrabsorber PS+Sylomer® spring-mounts allow to add a pre stress on the anti-vibration mount.

The AMC-MECANOCAUCHO® type **Vibrabsorber PS+Sylomer®** are ideal for stationary applications where the anti-vibration mount must not exceed a certain height either for the installation or during the maintenance of the machine when liquids are extracted and the mount must not exceed a certain height. Thanks to their low stiffness, they are often used on applications where a high isolation degree is required at low disturbing frequencies (600 to 1000 rpm).

Drawings


2 AMC 300 / 2 AMC 400 / 2 AMC 500 / 2 AMC 700 / 2 AMC 1000 / 2 AMC 1500

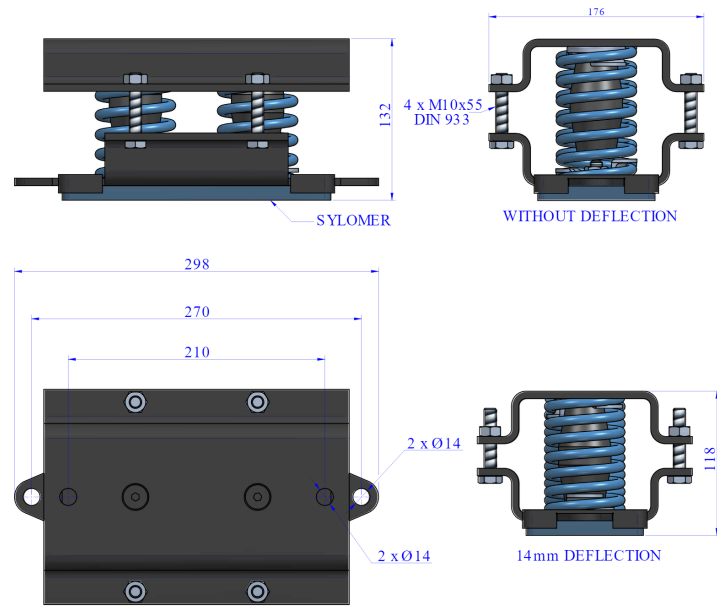

Type	Spring color	Max. Load(kg)	Code	K(N/mm)	Weight(kg)
2 AMC 300	BLUE	300	20532	103	6.7
2 AMC 400	WHITE	400	20533	132	6.8
2 AMC 500	BLACK	500	20534	166	7
2 AMC 700	CREAM	700	20535	227	7.2
2 AMC 1000	LIGHT GREY	1000	20536	536	7.8
2 AMC 1500	GREEN	1500	20537	813	8.3

Elastic properties

LOAD DEFLECTION GRAPH
AMC MECANOCAUCHO® 2 AMC

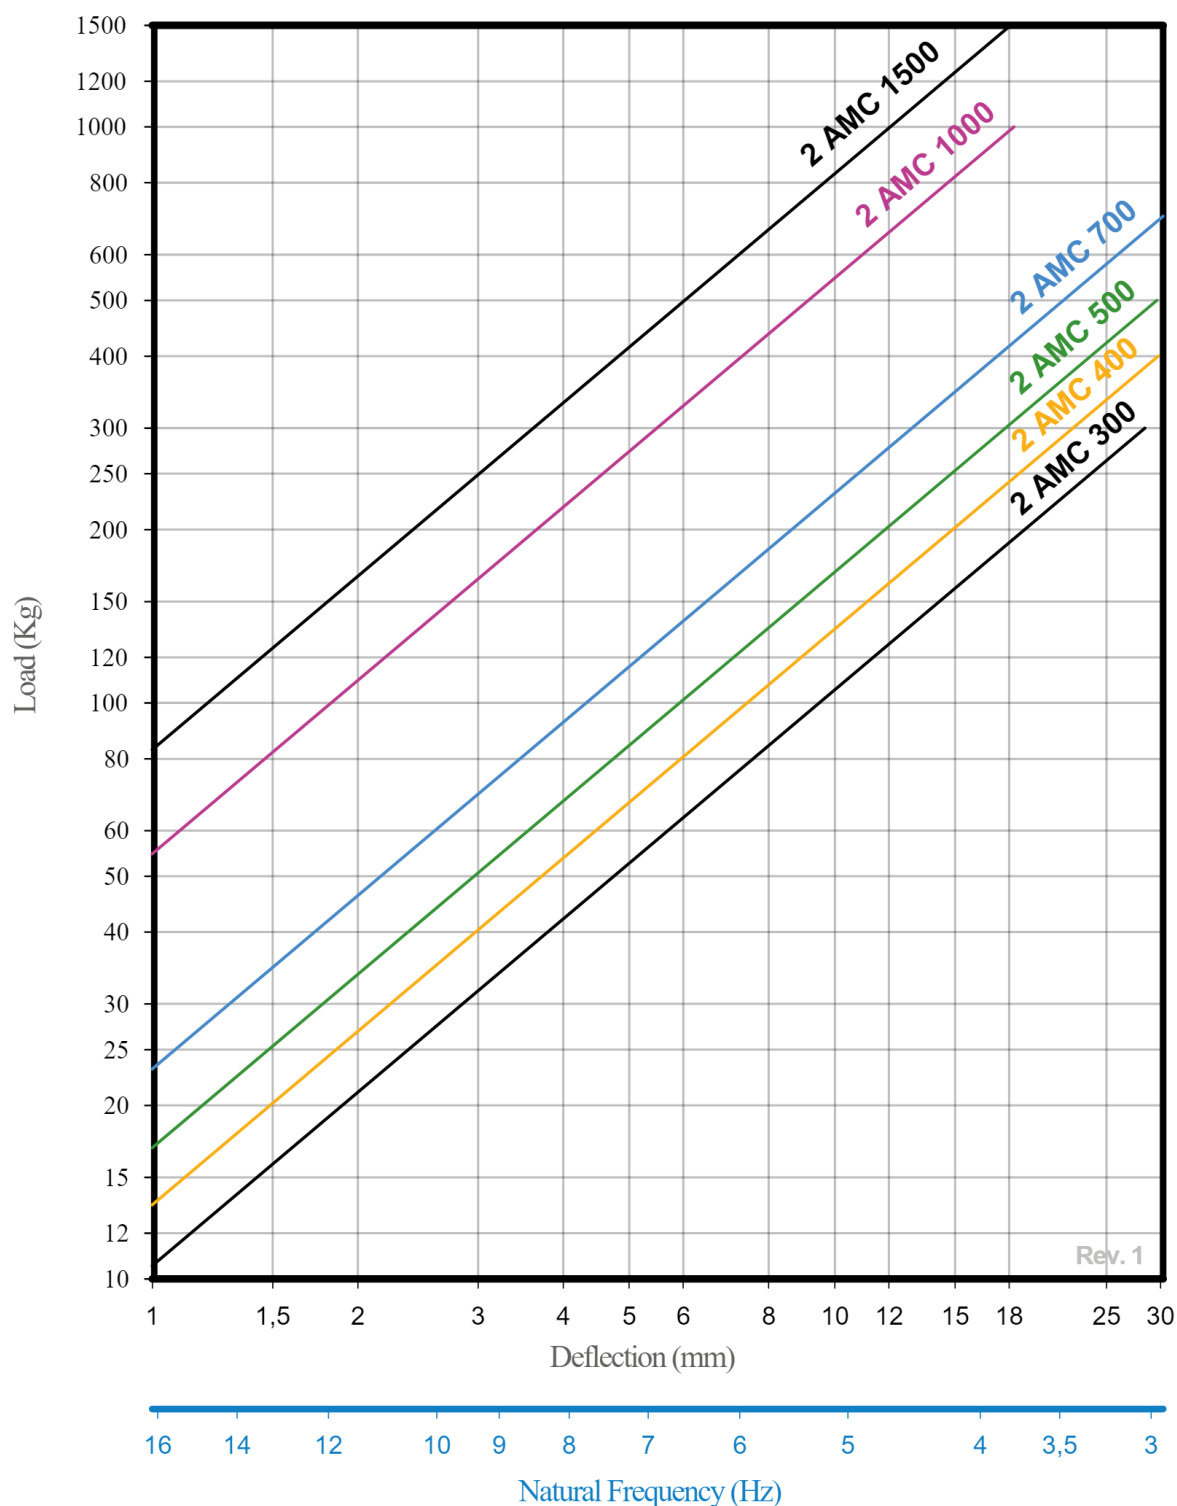

Technical characteristics

The design of these **anti vibration mounts** is composed of metal parts in omega shape that allow a preload of the mount. This is often necessary on HVAC equipment that is connected to piping and the mount must not raise during the maintenance, due to the extraction of liquids. For some cases when the spring mount must be inserted or slid on a gap, this feature is interesting for the assembly.

These mounts are equipped of Sylomer® pad for the isolation of high frequencies that may go through the coil springs.

The elastic properties remain the same as the actual range of our **Vibrabsorber spring mounts**. The load range of these mounts is from 50 to 750Kg per **anti-vibration mount**.

The metal parts are epoxy coated in order to withstand to arduous corrosive environments.