

Sistema di regolazione altezza standard

Sistema di regolazione composto da bullone, dadi e rondelle per regolazioni fini di livellamento con zincatura anticorrosiva.




Questo sistema di regolazione dell'altezza viene zincato e cromato secondo la norma DIN 50691/ISO 2081 per proteggerlo dalla corrosione.



Disegni

STUD

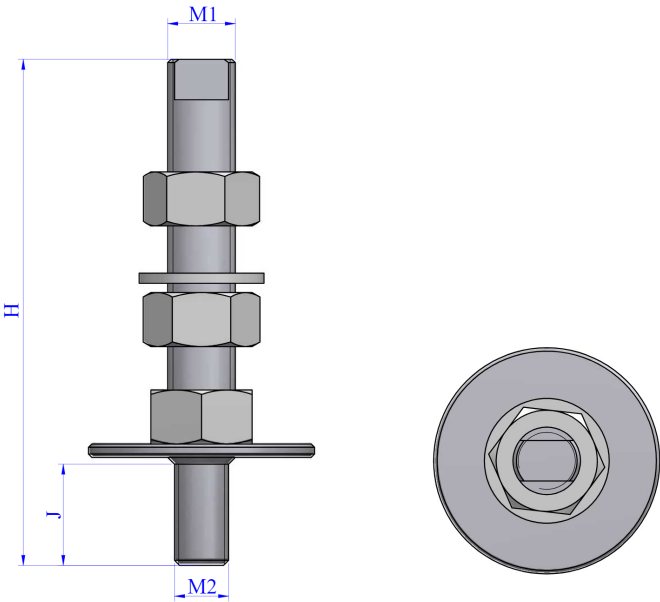

Tipo	Codice	M1	M2	H(mm)	Machine Head	J(mm)	Peso(gr)
STUD	708001	M12	M12	100	Y	-	147
	708008	M16	M12	110	Y	25	0
	708003	M16	M16	110	Y	-	285
	708078	M20	M16	150	Y	30	475
	708004	M20	M20	130	N	-	475
	708049	M24	M24	135	N	-	1027

Caratteristiche tecniche

DNV rules for ships/ High Speed light craft, Issue Jan 2016 Point 4 Chapter 3 Section1 F202, establishes that standard height adjusters are not acceptable for leveling, due to cyclic bending moments that the studs and bolts are subjected to. This is the reason why leveling of mounts using shims beneath the mounts is the only recommended method for leveling.

AMC-MECANOCAUCHO shares also this method and that is the reason why AMC-MECANOCAUCHO® **Shims** have been developed. In order to achieve a fine leveling **HI-SEC height adjusters** allow a final precise adjusting with security.

Standard height adjusters are not recommended by naval classification institutions neither by AMC-MECANOCAUCHO®. They are recommended only for static applications where leveling below 3mm is achieved.