SCBR Mount

Compact anti-vibration mount with expandable elastomer lip and metal reinforcement, designed for direct and durable installation in the chassis and improved protection against elastomer fatigue.



The **AMC-MECANOCAUCHO® SCBR anti-vibration mounts** are compact elastic elements designed to be **installed directly into a hole in the chassis**, providing a simple, reliable and cost-effective vibration isolation connection.

During tightening, the **lower rubber lip deforms and expands**, securing the mount within the chassis and creating a **multidirectional elastic connection** capable of absorbing vibration and shock.

The SCBR version incorporates **metal reinforcement around the neck**, protecting the elastomer against friction with the mounting hole. This design reduces the risk of **premature elastomer fatigue** and improves the **durability of the mount** in applications subjected to vibration, shock and repeated dynamic loads.


Its compact design and quick installation make the SCBR particularly suitable for **mobile machinery, industrial vehicles, cabs, enclosures and auxiliary equipment**.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Drawings

SCBR 38

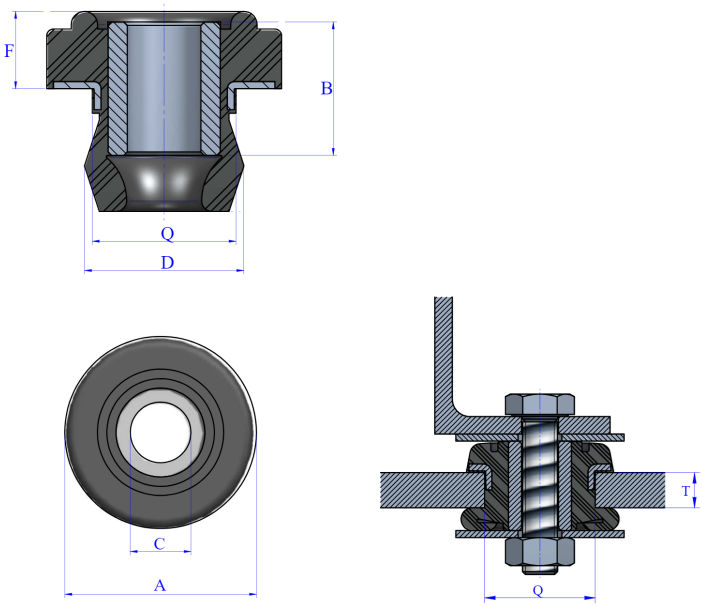


Type	Tightening torque Max. (Nm)	A(mm)	B(mm)	C(mm)	D(mm)	F(mm)	T Max. (mm)	Q(mm)	T Min. (mm)	Weight(gr)	Washer	Code	Max. Load(kg)	Shore
SCBR 38	41	34	19	10,75	20,75	11	5	20,5	3	30	611065	138045	35	45 Sh
												138047	60	60 Sh

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

SCBR 42 / SCBR 45

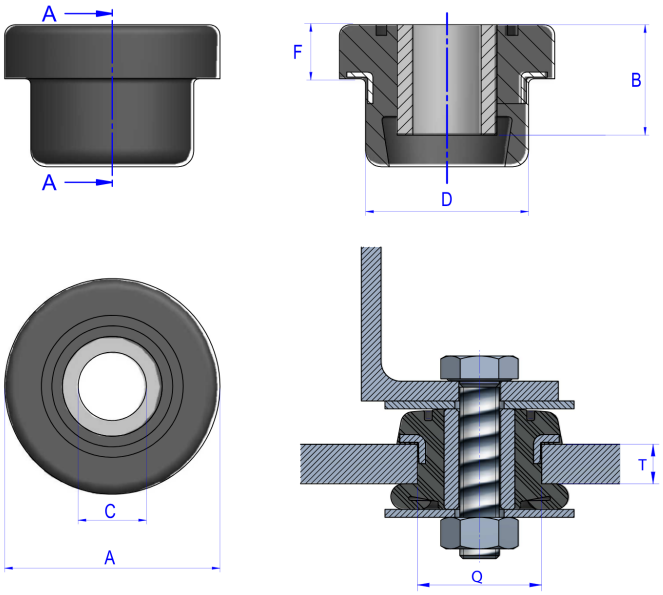



Type	Tightening torque Max. (Nm)	A(mm)	B(mm)	C(mm)	D(mm)	F(mm)	T Max. (mm)	Q(mm)	T Min. (mm)	Weight(gr)	Washer	Code	Max. Load(kg)	Shore
SCBR 42	71	42	21,7	13	31,5	9,5	6	31,5	6	40	611080	138051	75	60 Sh
SCBR 45	41	42	25,5	10,5	31,5	10	11	31,5	10	56	611080	138027	100	60 Sh

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Elastic properties

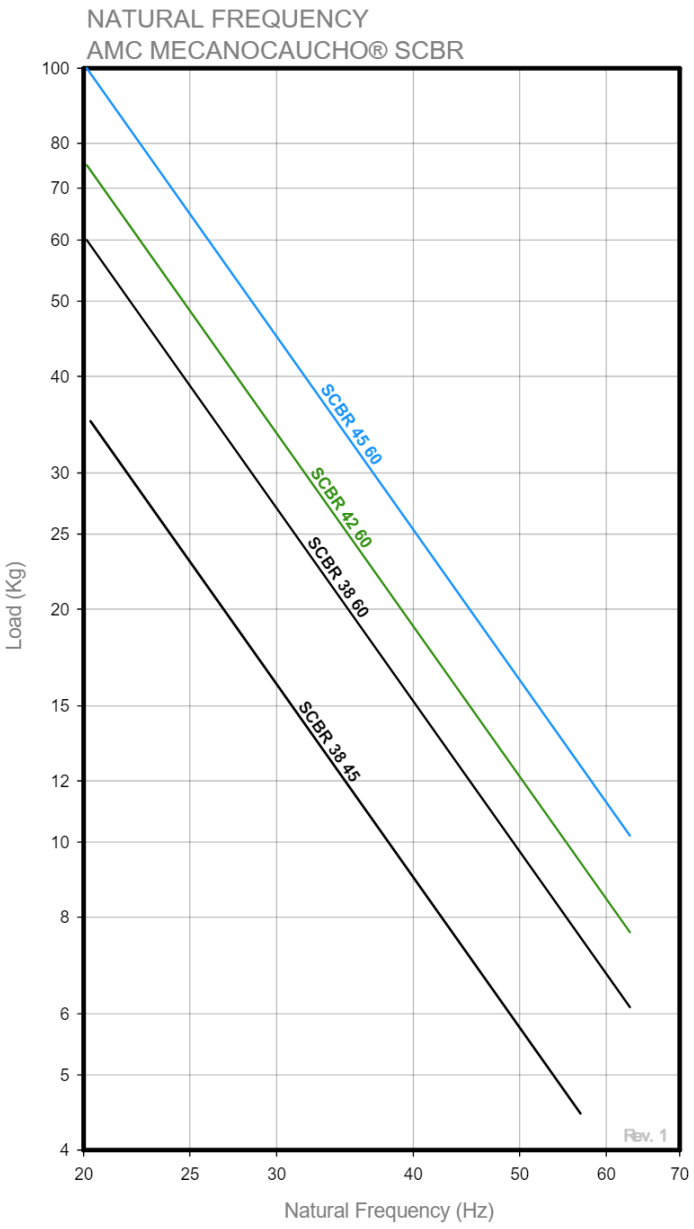

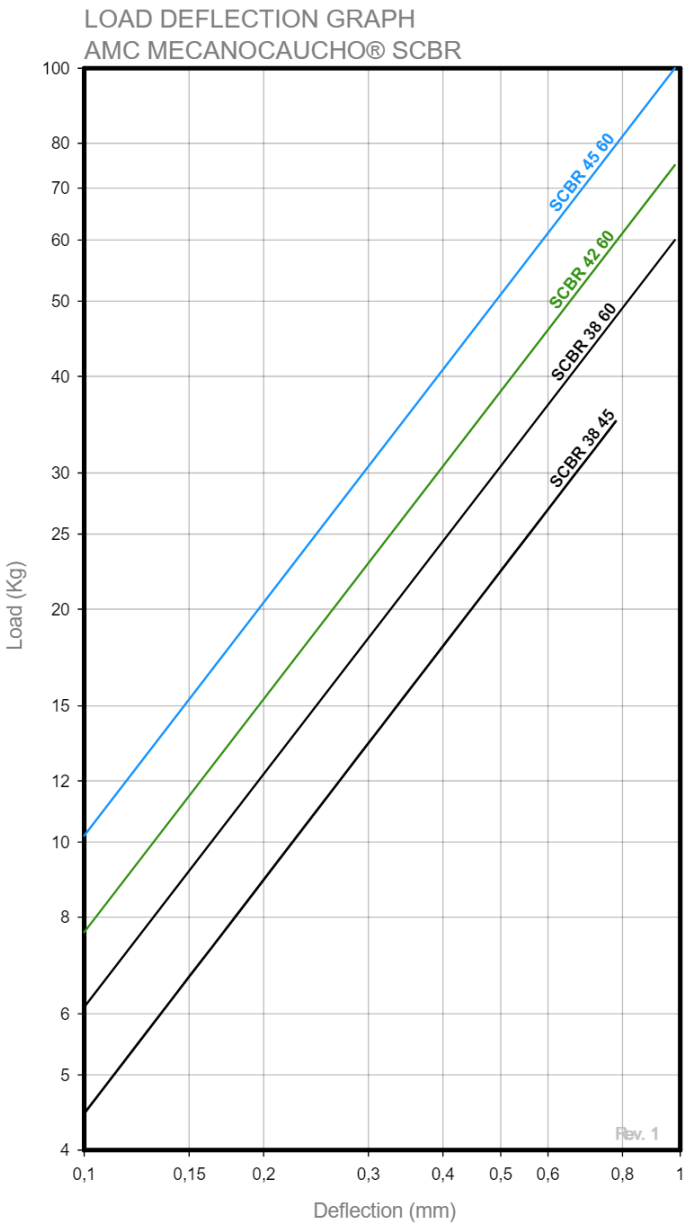

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Mount offering high stability

Suspensions built with this mount barely move, thanks to a geometry designed to control the movement of the suspended element.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.