

SCHR Vibration Isolator

Reinforced SCH vibration isolator with metal reinforcement around the mounting hole, providing increased durability under dynamic loads and protecting the elastomer against fatigue caused by friction with the frame.



The **AMC-MECANOCAUCHO® SCHR vibration isolators** consist of two rubber elements, one of which incorporates an **internal metal sleeve** to guide the mounting bolt.


The isolator is installed directly into a **machined hole in the frame**. When tightened, the rubber elements are **pre-compressed**, with the frame thickness "T" determining the level of pre-compression and ensuring a stable and secure installation.

Compared with the standard SCH vibration isolator, the SCHR incorporates **metal reinforcement around the mounting hole**, protecting the elastomer against **fatigue caused by friction with the frame**. This design improves the **durability of the isolator**, particularly in applications subjected to vibration, shock and repeated dynamic loads.

To ensure correct operation, **the frame thickness T and mounting hole diameter must comply with the values specified in the technical table.**

Drawings

SCHR 35 / SCHR 50 / SCHR 65 / SCHR 90 / SCHR 125 / SCHR 140

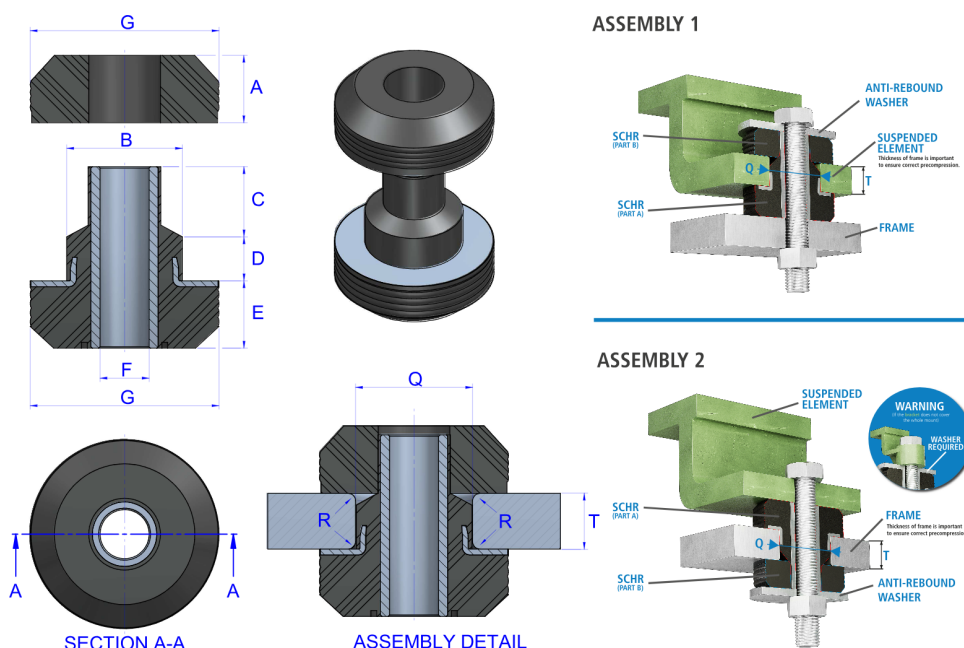

Type	Tightening torque Max. (Nm)	A(in)	B(in)	C(in)	D(in)	E(in)	F(in)	G(in)	T Max. (in)	Q(in)	T Min. (in)	Weight(lbs)	R(in)	Code	Max. Load (lbs)	Shore
SCHR 35	0.81	0.43	0.79	0.43	0.16	0.43	0.32	1.32	0.24	0.8	0.24	0.09	0.04	138621	88	45 Sh
														138623	176	60 Sh
SCHR 50	2.8	0.79	1.25	0.77	0.41	0.79	0.53	1.93	0.55	1.25	0.49	0.34	0.06	138535	176	45 Sh
														138534	331	65 Sh
														138559	441	75 Sh
														138551	353	50 Sh
SCHR 65	6.69	0.91	1.56	0.94	0.59	0.91	0.66	2.54	0.87	1.57	0.75	1	0.1	138552	661	65 Sh
														138658	992	75 Sh
														138547	573	45 Sh
SCHR 90	11.42	0.98	2.22	1.22	0.67	0.98	0.91	3.46	1.14	2.24	0.98	1	0.12	138548	992	60 Sh
														138216	1433	50 Sh
SCHR 125	34.65	1.26	2.57	1.26	0.87	1.26	1.06	4.94	1.26	2.59	0.98	3	0.12	138217	1763	60 Sh
														138508	1543	45 Sh
SCHR 140	46.85	1.38	2.76	1.22	0.51	1.38	1.22	5.51	0.79	2.8	0.79	4	0.12	138510	4408	60 Sh



AMC MECANOCAUCHO
 Industrialdea Zona A - Pab. 35.
 Asteasu E-20159, Gipuzkoa
 Spain


Tel.: +34 843 74 00 13

sales@amcsa.es


www.mecanocaucho.com

Elastic properties

NATURAL FREQUENCY
AMC MECANOCAUCHO® SCHR

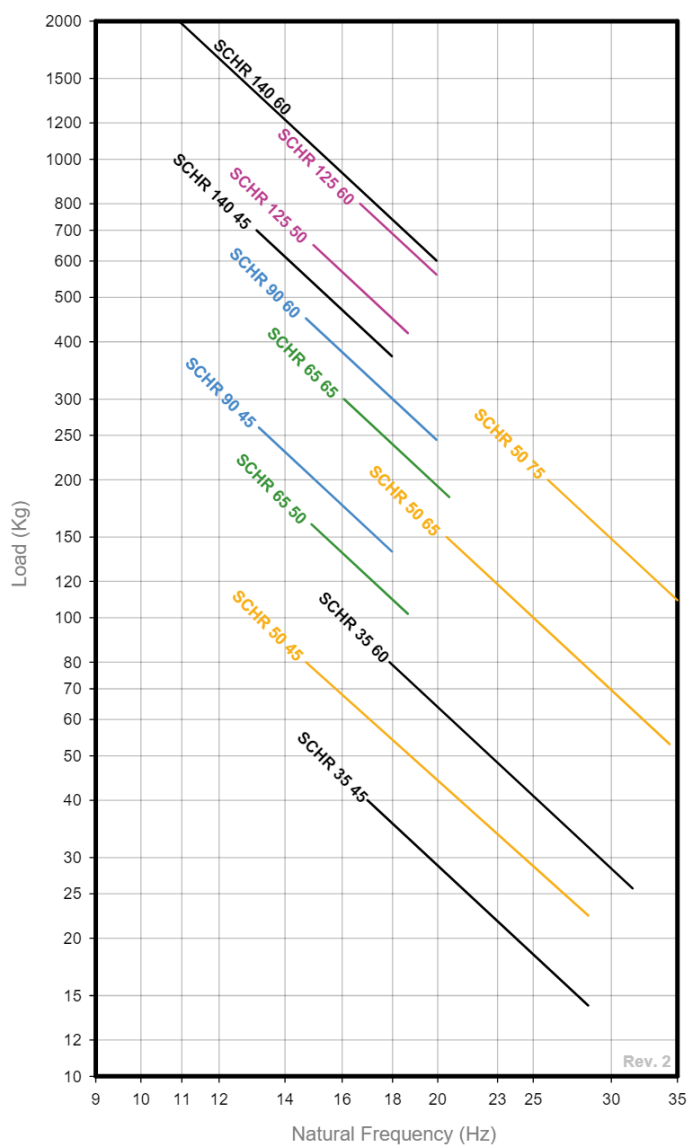

LOAD DEFLECTION GRAPH
AMC MECANOCAUCHO® SCHR

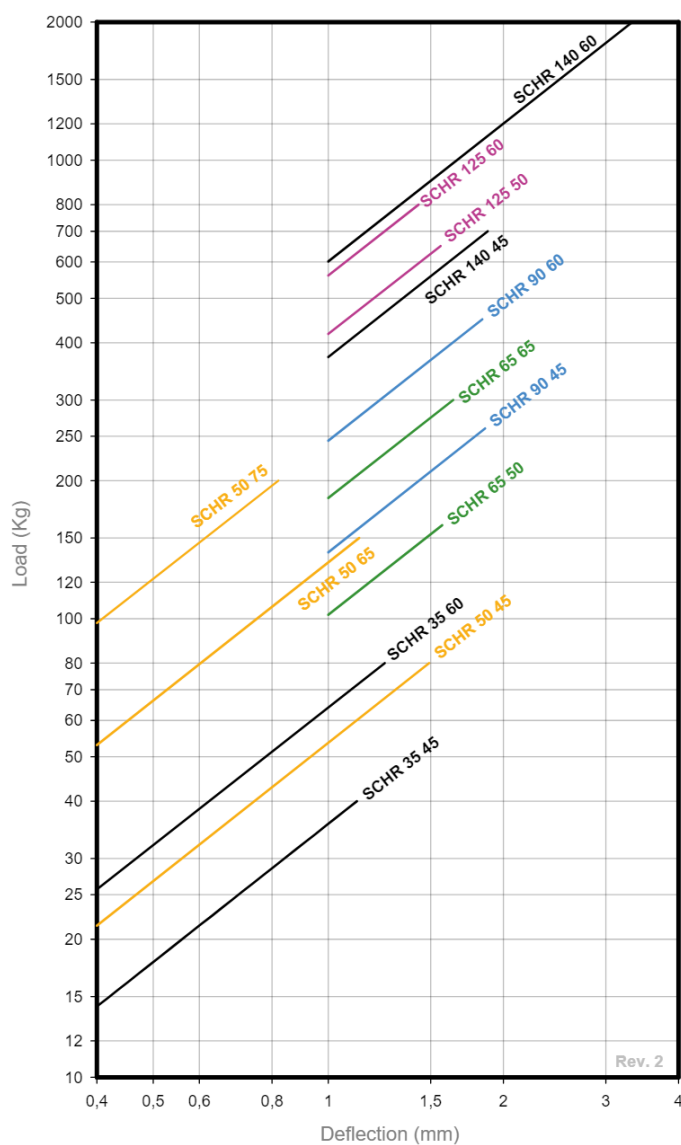

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13



sales@amcsa.es



www.mecanocaucho.com

Technical characteristics

This antivibration mount is ideal for applications of major dynamic loads where movement control is necessary, such as in the cabins of all types of mobile vehicles. It also offers optimal stability, as well as good attenuation of impacts and vibrations.



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13



sales@amcsa.es



www.mecanocaucho.com