

SV Low-Profile Machine Vibration Isolator

Low-profile machine vibration isolator with oil-resistant rubber pad, available in steel or stainless steel and designed for installation without floor anchoring.



The **AMC-MECANOCAUCHO® SV Low-Profile Machine Vibration Isolators** are compact isolators designed to support and isolate **machinery and equipment where floor anchoring is not required**.

Their **low-profile design** makes them particularly suitable for installations where **clearance beneath the machine is limited**, while providing **elastic decoupling between the equipment and the floor** to reduce the transmission of **vibration and structure-borne noise**.

The **oil-resistant rubber pad** also provides good grip on the floor, allowing stable installation without mechanical fastening.

Available with **steel or stainless-steel components**, SV Low-Profile vibration isolators can be adapted to different operating environments and are particularly suitable where **low installation height, stability, and vibration isolation** are required.



AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain


Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

Drawings

000 B / 00 B / 0 B / 1 B / 2 B / 3 B / 4 B / 5 B / 00 B STAINLESS STEEL / 0 B STAINLESS STEEL / 1 B STAINLESS STEEL / 2 B STAINLESS STEEL / 3 B STAINLESS STEEL / 4 B STAINLESS STEEL / 5 B STAINLESS STEEL

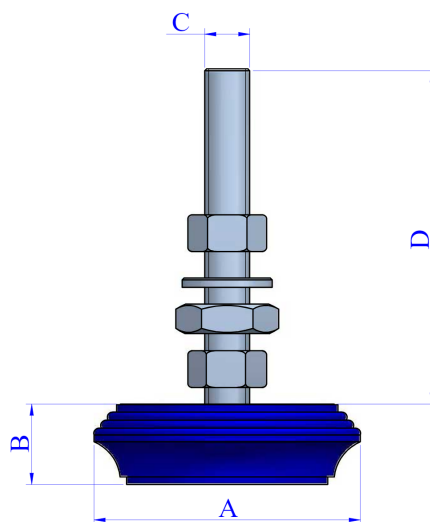

Type	Max. Load (lbs)	A(in)	B(in)	C(in)	D(in)	Min.Load (lbs)	Code	Weight(lbs)
000 B	176	1.69	0.63	M-8	1.77	88	147000	0.14
00 B	264	2.36	0.71	M-10	3.19	132	147001	0.41
0 B	353	2.76	0.79	M-12	3.5	198	147002	1
1 B	771	3.31	0.98	M-12	3.46	287	147003	1
2 B	1322	3.94	0.79	M-14	4.29	595	147004	1
3 B	1984	4.72	0.98	M-16	4.57	992	147005	2
4 B	2645	5.51	1.3	M-16	4.57	1543	147006	3
5 B	3857	6.3	1.42	M-16	4.57	2424	147007	3
00 B STAINLESS STEEL	264	2.36	0.71	M-10	3.19	132	147014	0.37
0 B STAINLESS STEEL	353	2.76	0.79	M-12	3.5	198	147013	1
1 B STAINLESS STEEL	771	3.35	0.98	M-12	3.5	287	147012	1
2 B STAINLESS STEEL	1322	3.94	0.79	M-14	4.29	595	147015	1
3 B STAINLESS STEEL	1984	4.72	0.98	M-16	4.57	992	147011	2
4 B STAINLESS STEEL	2645	5.51	1.3	M-16	4.57	1543	147016	3
5 B STAINLESS STEEL	3857	6.3	1.42	M-16	4.57	2424	147017	4



AMC MECANOCAUCHO
 Industrialdea Zona A - Pab. 35.
 Asteasu E-20159, Gipuzkoa
 Spain



Tel.: +34 843 74 00 13



sales@amcsa.es



www.mecanocaucho.com

Technical characteristics

The elastomer used is a mixture of oil-resistant synthetic Nitrile Butadiene Rubber (NBR).