
Akustik + Sylomer® Floor Mount – Structural noise Isolator for Floating Floors

Vibration-damping support with a 'U' profile for 50 mm battens. Ideal for floating wooden floors, with leveling and direct fixing to the floor.

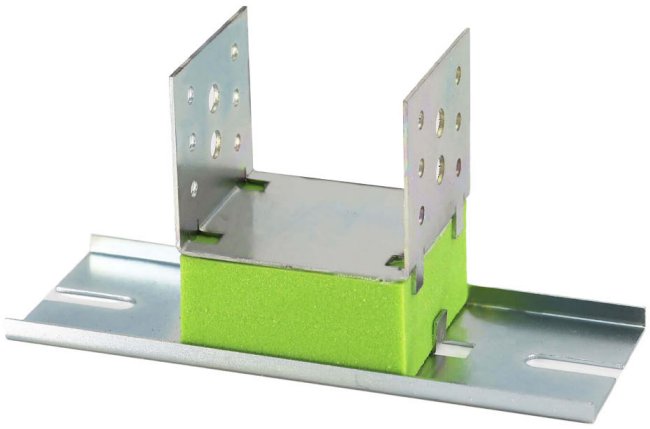

The **Akustik + Sylomer® Floor Mounts** are designed to provide **point-supported acoustic decoupling for floating floors** constructed on a batten system. Their low height allows particularly shallow floor build-ups.

As with all products in the **AMC Akustik range**, correct loading is essential to achieve optimum **structure-borne and impact sound isolation**. The Floor Mounts are therefore available in different load ratings, from **25 to 100 kg per mount**.

Under the appropriate load, **natural frequencies of up to 12 Hz** can be achieved, effectively reducing the transmission of structure-borne sound through the building structure and providing a **high level of impact sound reduction**.


According to measurements carried out by independent testing laboratories, **Akustik + Sylomer® Floor Mounts can provide an improvement in impact sound insulation of up to 30 dB**.


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Drawings


Akustik+Sylomer® 25 Floor Mount

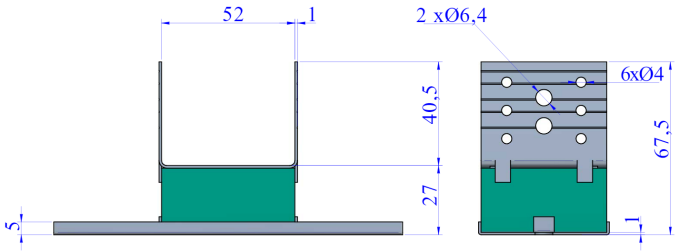


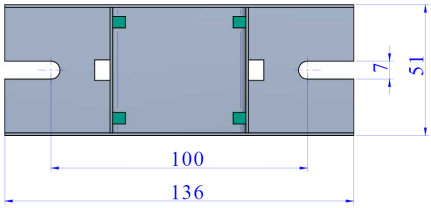

Type	SUMMARY	Code	Max. Load(lbs)	Weight(lbs)	Thickness(in)
Akustik+Sylomer® 25 Floor Mount	Mounts for installing wooden floors with batten system.	23562	55	0.29	0.98

Akustik+Sylomer® 30 Floor Mount

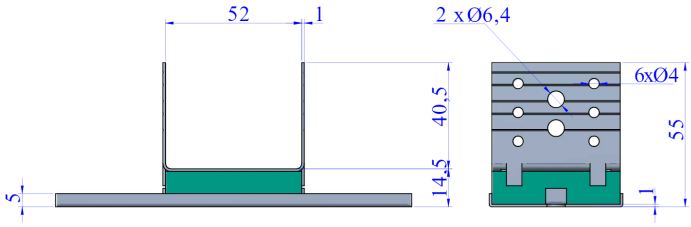

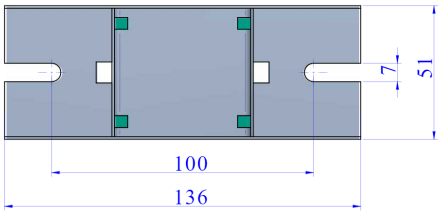


Type	SUMMARY	Code	Max. Load(lbs)	Weight(lbs)	Thickness(in)
Akustik+Sylomer® 30 Floor Mount	Mounts for installing wooden floors with batten system.	23561	66	0.27	0.47

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com


In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Akustik+Sylomer® 40 Floor Mount

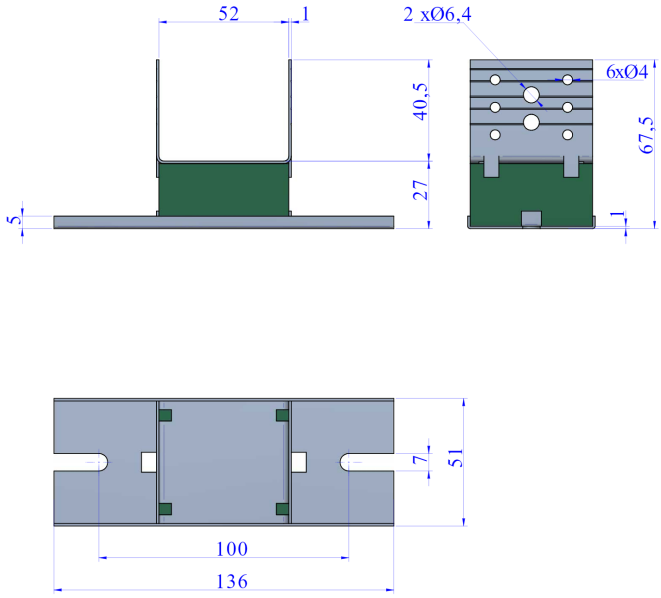

Type	SUMMARY	Code	Max. Load(lbs)	Weight(lbs)	Thickness(in)
Akustik+Sylomer® 40 Floor Mount	Mounts for installing wooden floors with batten system.	23261	88	0.29	0.98

Akustik+Sylomer® 75 Floor Mount

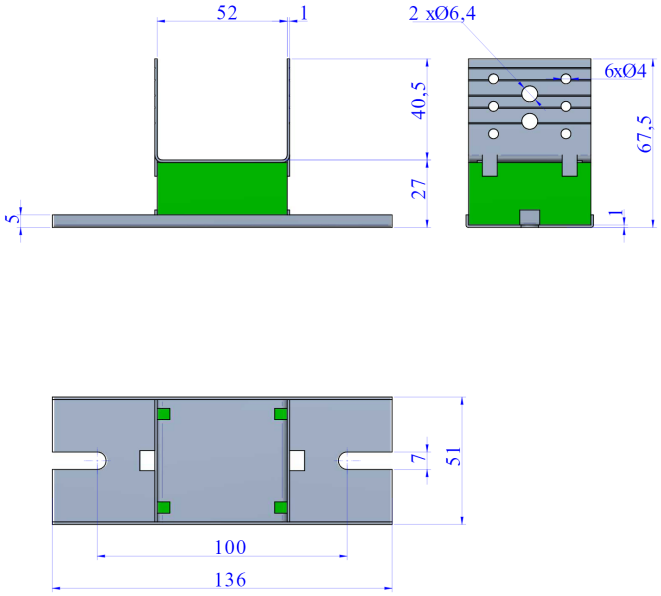



Type	SUMMARY	Code	Max. Load(lbs)	Weight(lbs)	Thickness(in)
Akustik+Sylomer® 75 Floor Mount	Mounts for installing wooden floors with batten system.	23564	165	0.28	0.98

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Akustik+Sylomer® 100 Floor Mount

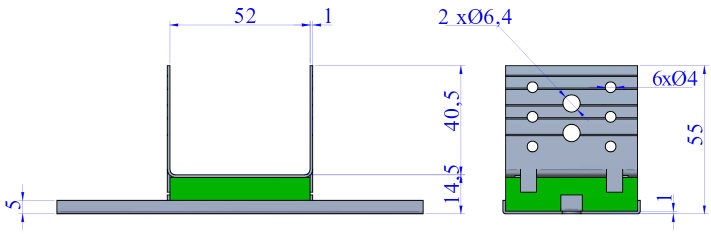

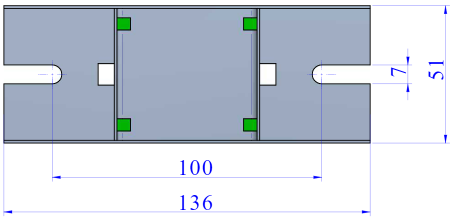


Type	SUMMARY	Code	Max. Load(lbs)	Weight(lbs)	Thickness(in)
Akustik+Sylomer® 100 Floor Mount	Mounts for installing wooden floors with batten system.	23563	220	0.28	0.47

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com


In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.


Elastic properties


NATURAL FREQUENCY GRAPH

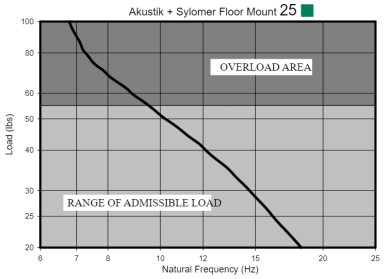



LOAD-DEFLECTION GRAPH

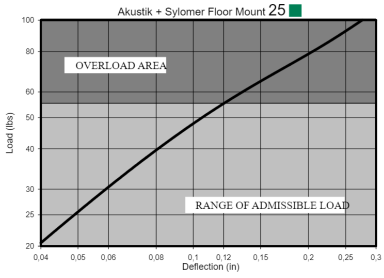


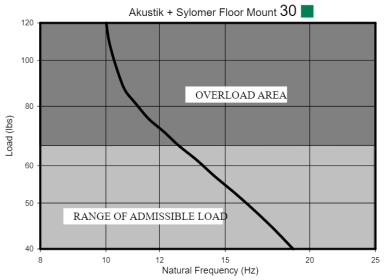


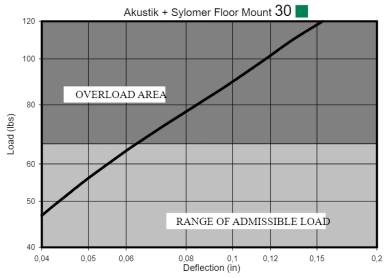


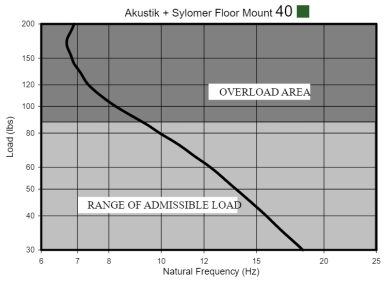


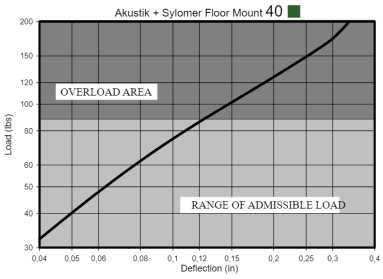

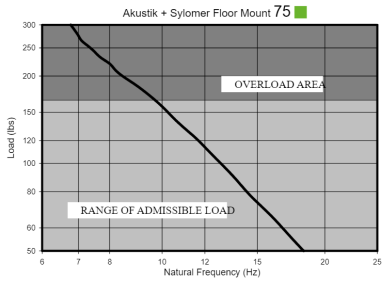

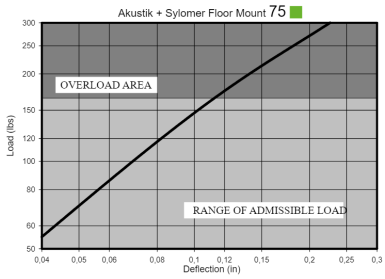

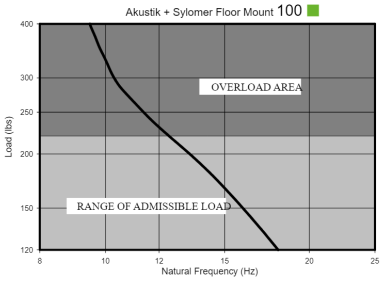

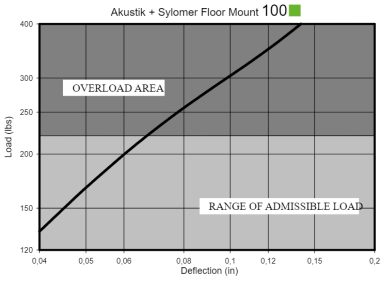

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.

Advantages

Easy installation

This mount requires no major modifications to the structure for installation.

Improved isolation

It offers improved isolation compared to conventional anti-vibration mounts of similar geometry.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 15/11/2026.