


TSR 40 x 40

Anti-vibration support 40×40 with internal thread, anti-slip plate and six models for different loads. Mechanical or support fixing.

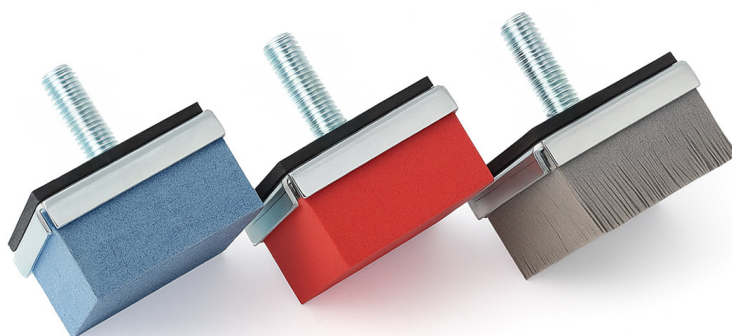

The AMC-MECANOCAUCHO® **TSR type anti vibration mounts** include a microcellular and resilient polyurethane compound for anti-vibration purposes called Sylomer®. This Sylomer® is oil resistant and with a temperature range of -30°C/+70°C.


The TSR mounts can be fixed mechanically thanks to the internal nut incorporated to the metallic part that is treated with an antioxidant coat. This coating complies to the RoHs regulations.

The above Chloroprene based rubber that is bonded to the metal acts as an anti-skid surface for those application where a mechanical fixation is not possible to be made. This layer provides an additional anticorrosive protection.

In order to match the application, 6 different densities are supplied for a wide range of loads.



Drawings

TSR 55 40X40 / TSR 110 40X40 / TSR 220 40X40 / TSR 450 40X40 / TSR 850 40X40

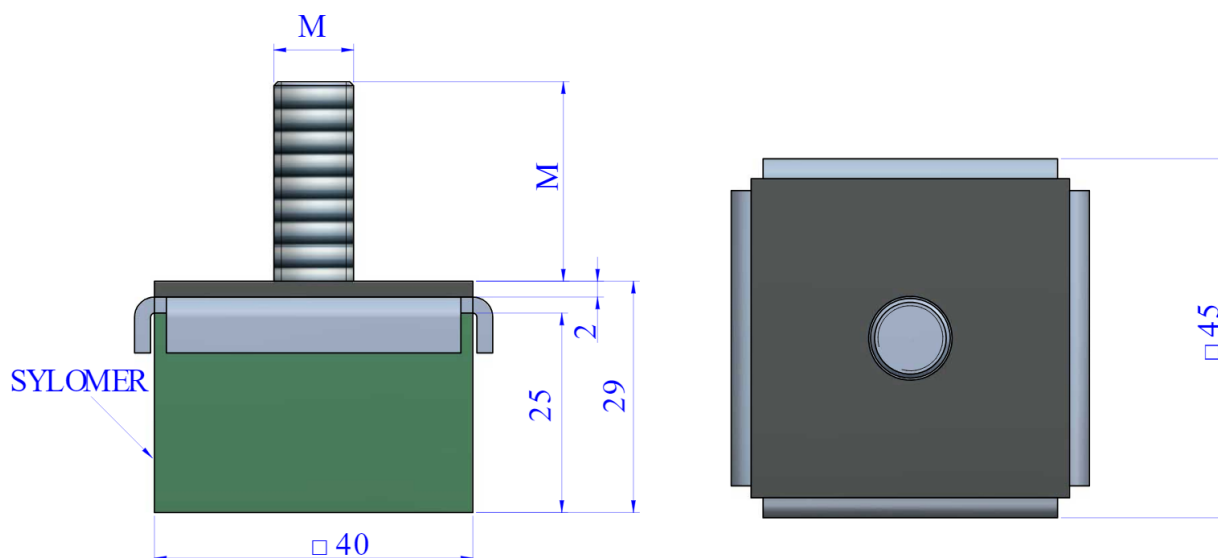

Type	Max. Load(kg)	Deflection(mm)	Nat Freq. (Hz)	Code	M
TSR 55 40X40	7.5	1.6	13.6	157035	M-8x20
				157066	M-10x25
TSR 110 40X40	15	2	11.7	157036	M-8x20
				157067	M-10x25
TSR 220 40X40	25	2,1	11.5	157037	M-8x20
				157070	M-10x25
TSR 450 40X40	45	2,4	11.6	157223	M-8x20
				157224	M10x25
TSR 850 40X40	70	2,4	11.1	157039	M-8x20
				157222	M10x25

Elastic properties

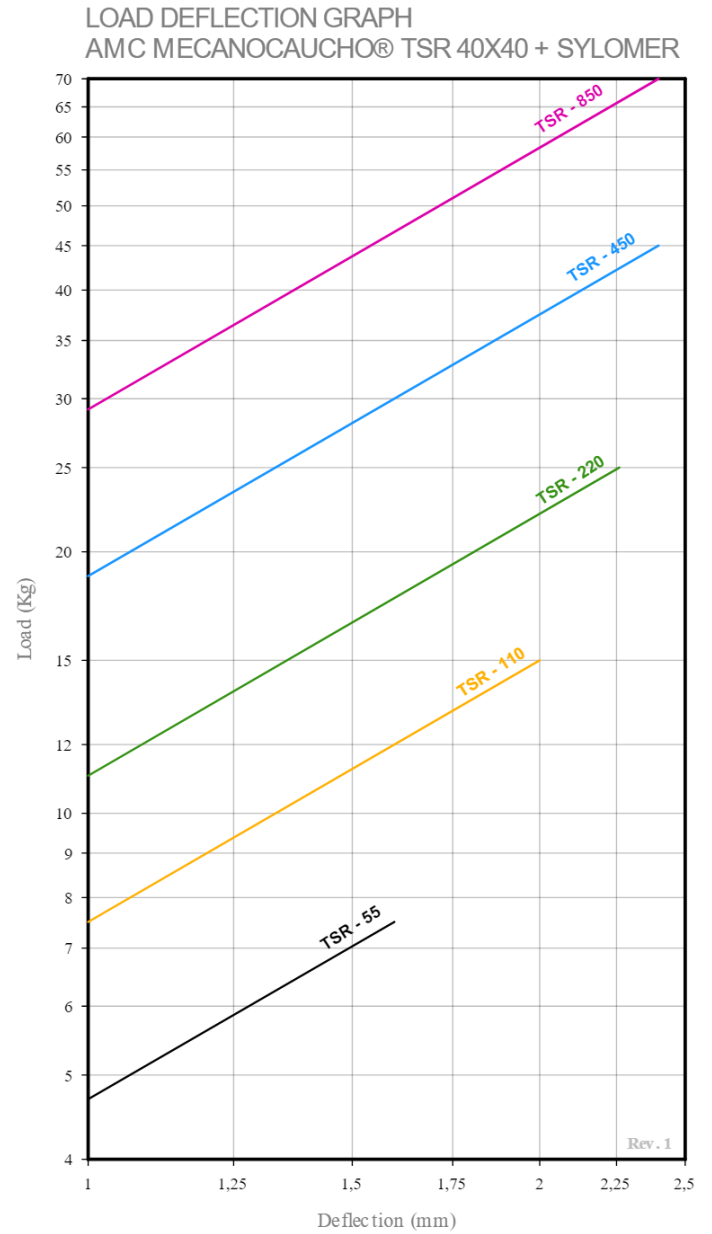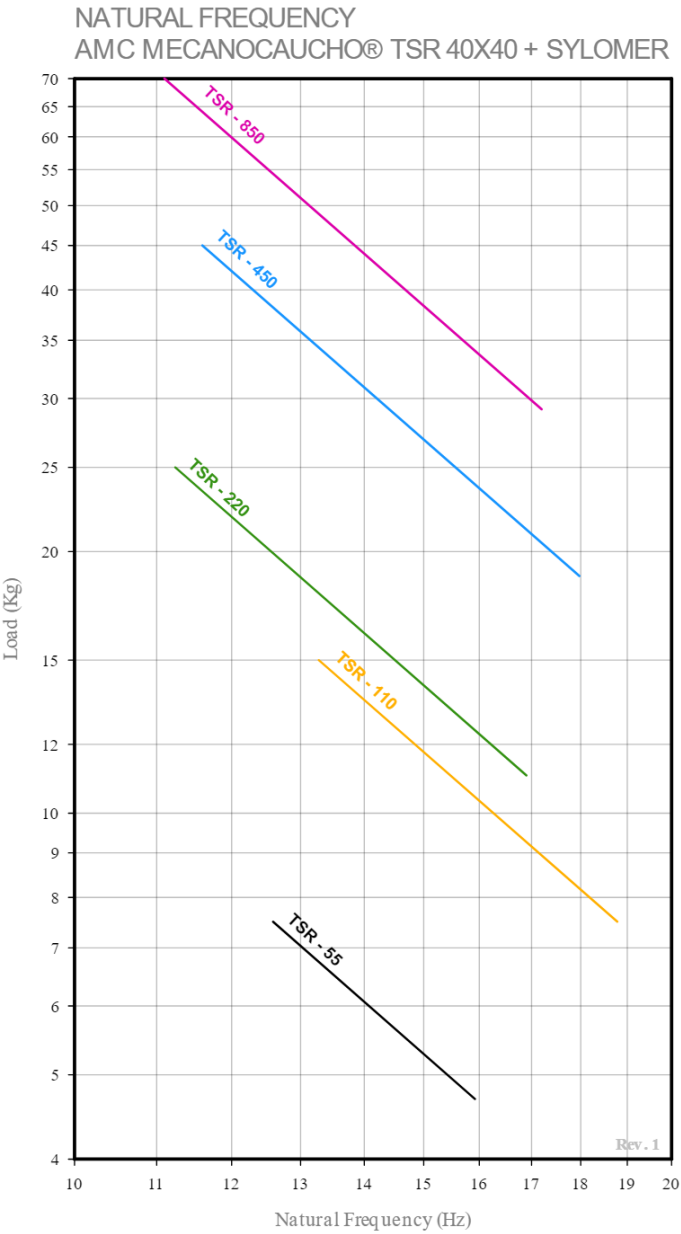

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com