5V-SH Spring Mount

Open high-deflection spring mount for very low-frequency vibration isolation. Static deflection up to 50 mm (2 inches) and natural frequencies as low as 3 Hz.



The **AMC-MECANOCAUCHO® 5V-SH spring mount** is designed for applications requiring **very low-frequency vibration isolation** and high load capacity.

With a **static deflection of up to 50 mm (2 inches)**, the springs can achieve **natural frequencies as low as 3 Hz**, providing highly effective isolation for low-speed equipment or machinery generating very low-frequency vibrations.

Its open design provides **no lateral restraint**, so particular attention must be paid to **equipment stability and the position of its centre of gravity**.


The spring mount incorporates a **levelling system** and a **Sylomer® pad**, complementing the action of the springs by improving vibration isolation at medium and high frequencies.


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Drawings

5V-SH

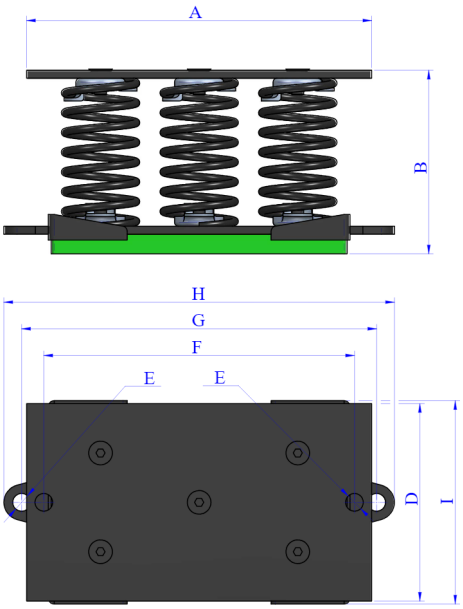

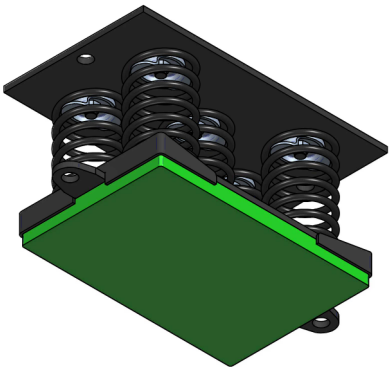


Type	Code	Spring color	Max. Load (kg)	K(N/mm)	A(mm)	B(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)	I(mm)	Weight(kg)
5V-SH	21040	BLUE	335	67	350	180	200	18	315	360	396	206	13.071
	21041	WHITE	475	93	350	180	200	18	315	360	396	206	13.356
	21042	BLACK	615	125	350	180	200	18	315	360	396	206	13.476
	21043	BEIGE	865	173	350	180	200	18	315	360	396	206	13.926
	21044	RED	1115	215	350	180	200	18	315	360	396	206	15.781
	21045	GREY	1675	342	350	180	200	18	315	360	396	206	16.786
	21046	GREEN	2230	439	350	180	200	18	315	360	396	206	18.116
	21049	BROWN	3500	752	350	180	200	18	315	360	396	206	18.116

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Elastic properties

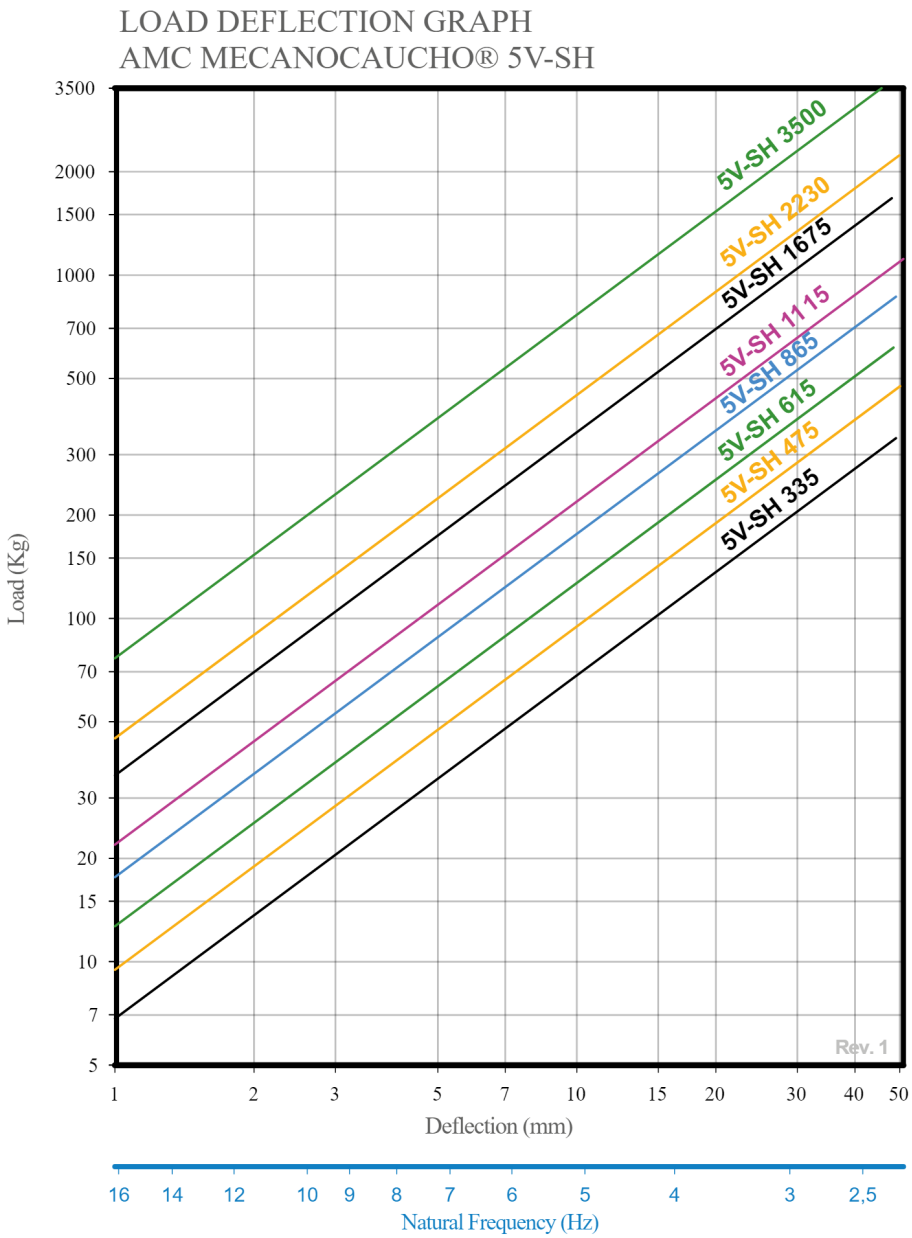

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Technical characteristics

The mounts are able to reach low natural frequencies from 2 to 5 Hz. The spring combined with sylomer® is able to provide high isolation at low and medium frequencies.

The curves are showing the deflection and natural frequencies according to the load of the spring. Temperature working range from -30 to 70º. Short term higher temperatures are possible.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Improved isolation

It offers improved isolation compared with conventional anti-vibration mounts of similar geometry.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.