

6V-SH Spring Isolator

Open high-deflection spring isolator for very low-frequency vibration isolation. Static deflection up to 2 inches (50 mm) and natural frequencies as low as 3 Hz.



The **AMC-MECANOCAUCHO® 6V-SH spring isolator** is designed for applications requiring **very low-frequency vibration isolation** and high load capacity.


With a **static deflection of up to 2 inches (50 mm)**, the springs can achieve **natural frequencies as low as 3 Hz**, providing highly effective isolation for low-speed equipment or machinery generating very low-frequency vibrations.

Its open design provides **no lateral restraint**, so particular attention must be paid to **equipment stability and the position of its center of gravity**.

The spring isolator incorporates a **leveling system** and a **Sylomer® pad**, complementing the action of the springs by improving vibration isolation at medium and high frequencies.


Drawings

6V-SH

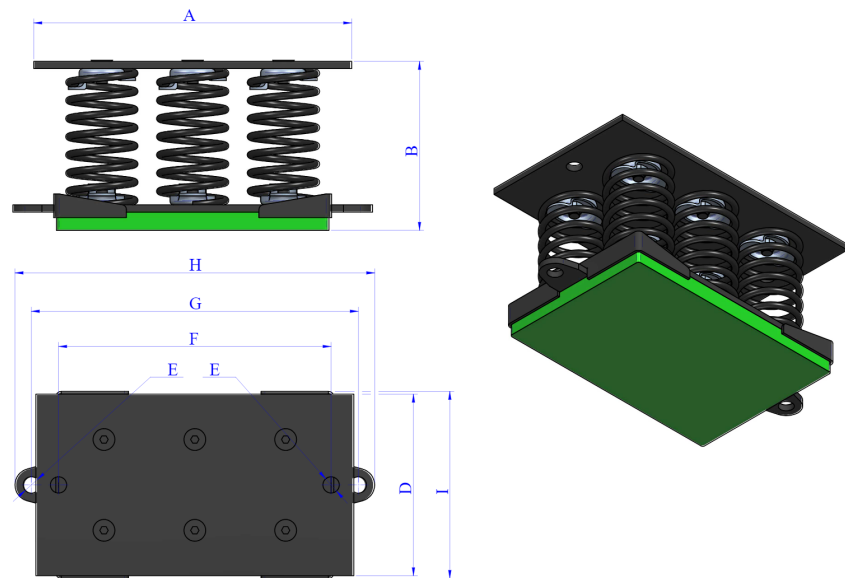

Type	Code	Spring color	Max. Load (lbs)	K(N/mm)	A(in)	B(in)	D(in)	E(in)	F(in)	G(in)	H(in)	I(in)	Weight(lbs)
6V-SH	21050	BLUE	886	80	13.78	7.09	7.87	0.71	11.81	14.17	15.59	8.11	31
	21051	WHITE	1256	112	13.78	7.09	7.87	0.71	11.81	14.17	15.59	8.11	31
	21052	BLACK	1627	149	13.78	7.09	7.87	0.71	11.81	14.17	15.59	8.11	32
	21053	BEIGE	2288	208	13.78	7.09	7.87	0.71	11.81	14.17	15.59	8.11	33
	21054	RED	2949	258	13.78	7.09	7.87	0.71	11.81	14.17	15.59	8.11	38
	21055	GREY	4430	410	13.78	7.09	7.87	0.71	11.81	14.17	15.59	8.11	40
	21056	GREEN	5898	527	13.78	7.09	7.87	0.71	11.81	14.17	15.59	8.11	44
	21059	BROWN	9257	902	13.78	7.09	7.87	0.71	11.81	14.17	15.59	8.11	44

Elastic properties

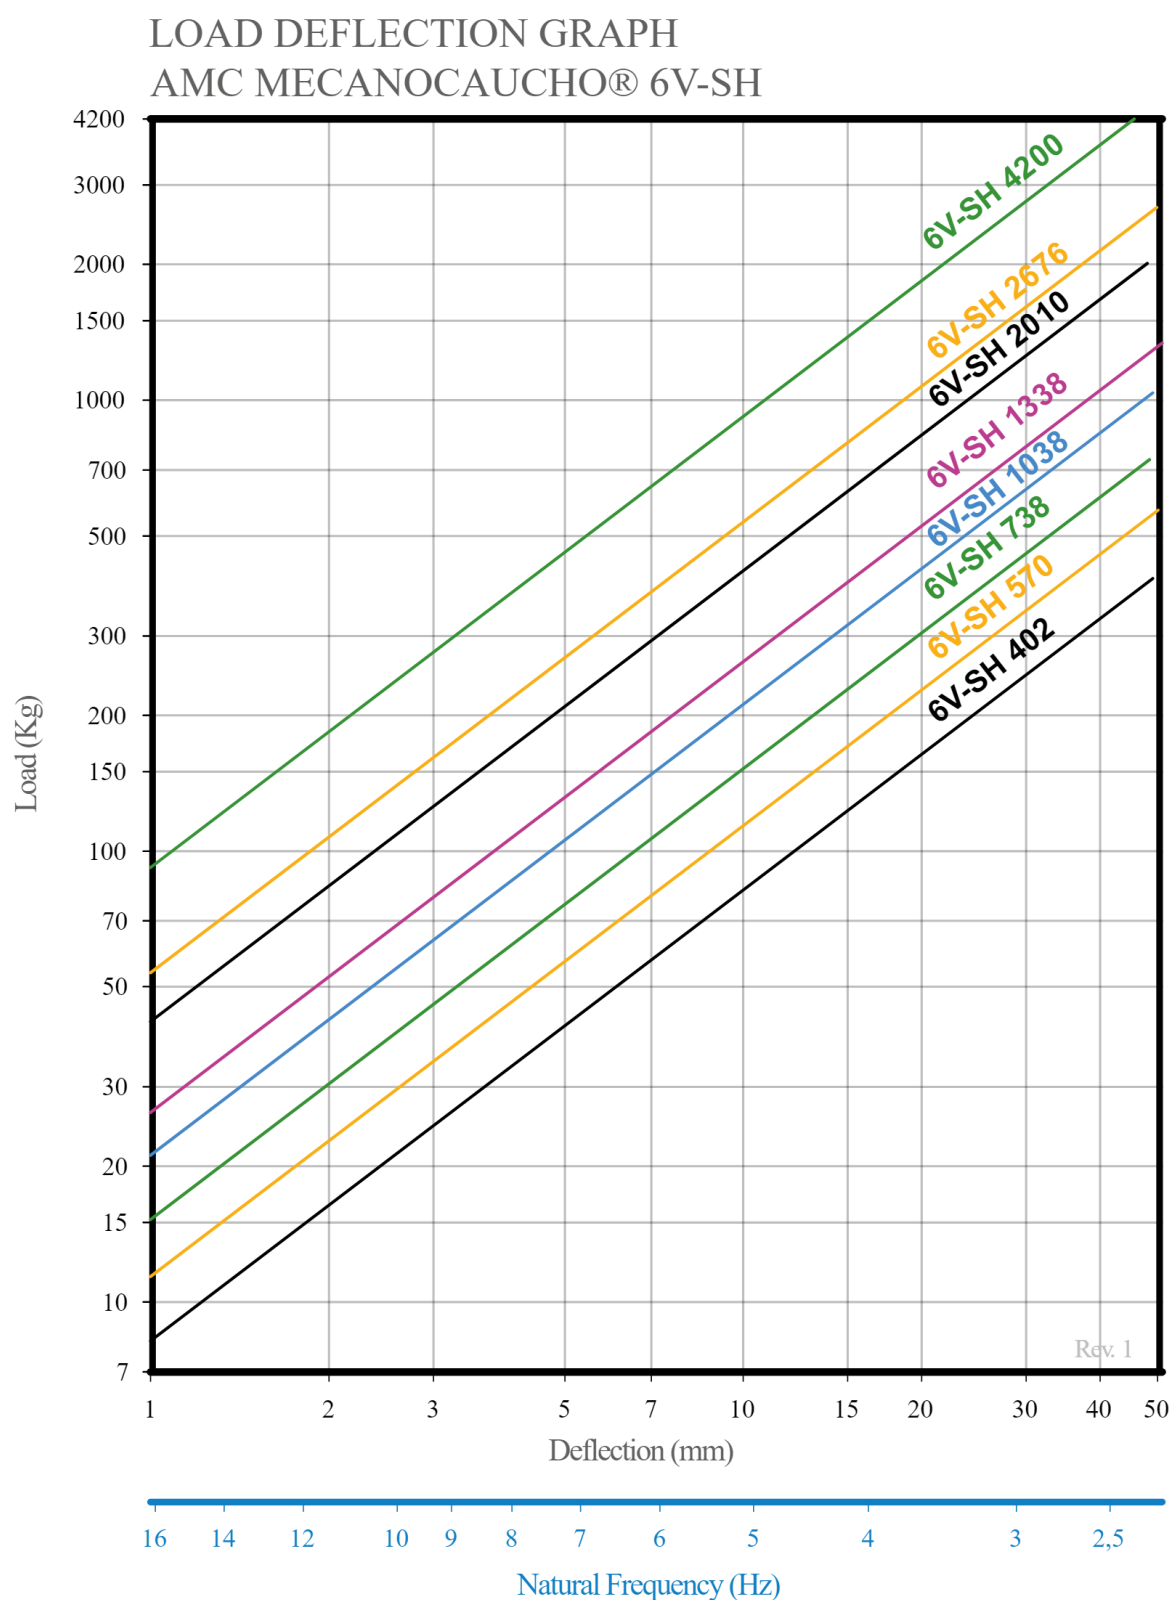

Technical characteristics

The mounts are able to reach low natural frequencies from 2 to 5 Hz. The spring combined with sylomer® is able to provide high isolation at low and medium frequencies.

The curves are showing the deflection and natural frequencies according to the load of the spring. Temperature working range from -30 to 70°. Short term higher temperatures are possible.