

2V-SR Spring Isolator

High-capacity spring isolator with Sylomer® base, offering up to 1.2 in (30 mm) static deflection and a natural frequency as low as 4 Hz.



The **AMC-MECANOCAUCHO® 2V-SR Spring Isolator** is designed for the **vibration isolation of machinery and equipment with high loads**, requiring a low natural frequency and effective low-frequency vibration isolation.


With a **static deflection of up to 1.2 in (30 mm)**, the springs provide **natural frequencies as low as 4 Hz**, ensuring effective low-frequency vibration isolation.

An **integrated leveling system** facilitates height adjustment and accurate leveling of the equipment during installation.

The 2V-SR Spring Isolator is supplied as standard with a **Sylomer® base**, which complements the action of the springs by reducing the transmission of **mid and high frequencies that may propagate through the steel springs**. The **springs + Sylomer® combination** therefore provides effective vibration isolation over a broader frequency range.

Drawings


2V-SR

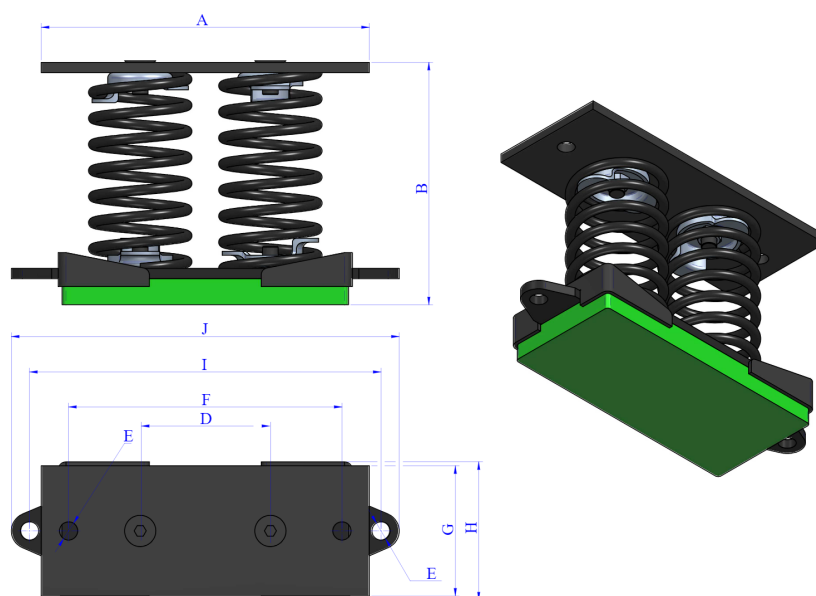

Type	Code	Max. Load (lbs)	Spring color	K(N/mm)	A(in)	B(in)	D(in)	E(in)	F(in)	G(in)	H(in)	I(in)	J(in)	Weight(lbs)
2V-SR	21322	882	BLACK	128	9.84	7.09	3.94	0.55	8.27	3.94	4.17	10.63	11.73	11
	21323	1763	BLACK	267	9.84	7.09	3.94	0.55	8.27	3.94	4.17	10.63	11.73	12
	21071	2865	BLACK	362	9.84	7.09	3.94	0.55	8.27	3.94	4.17	10.63	11.73	16
	21072	3526	BLACK	575	9.84	7.09	3.94	0.55	8.27	3.94	4.17	10.63	11.73	16
	21073	4408	BLACK	702	9.84	7.09	3.94	0.55	8.27	3.94	4.17	10.63	11.73	17
	21074	5290	BLACK	1007	9.84	7.09	3.94	0.55	8.27	3.94	4.17	10.63	11.73	18

Elastic properties

LOAD DEFLECTION GRAPHS AMC MECANOCAUCHO® 2V-SR

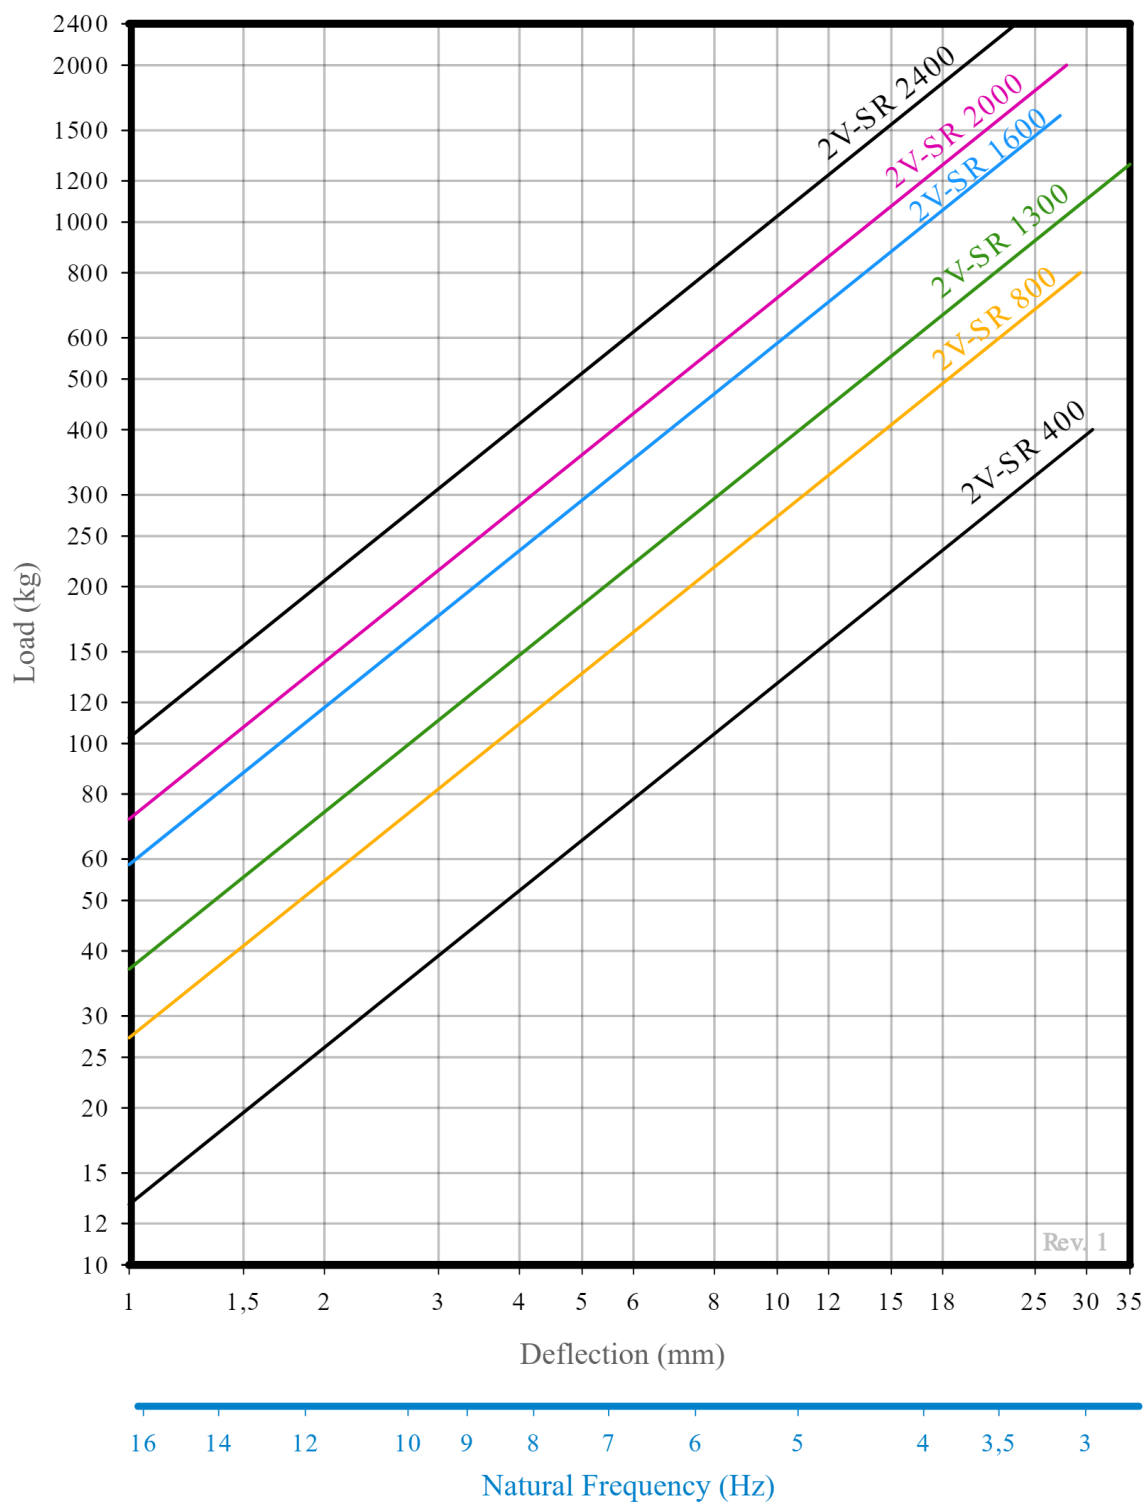

Technical characteristics

The mounts are able to reach low natural frequencies from 3 to 5 Hz. The spring combined with sylomer® is able to provide high isolation at low and medium frequencies.

The curves are showing the deflection and natural frequencies according to the load of the spring. Temperature working range from -30 to 70°. Short term higher temperatures are possible.