

4V-SR Spring Isolator

High-capacity spring isolator with Sylomer® base, offering up to 1.2 in (30 mm) static deflection and a natural frequency as low as 4 Hz.



The **AMC-MECANOCAUCHO® 4V-SR Spring Isolator** is designed for the **vibration isolation of machinery and equipment with high loads**, requiring a low natural frequency and effective low-frequency vibration isolation.


With a **static deflection of up to 1.2 in (30 mm)**, the springs provide **natural frequencies as low as 4 Hz**, ensuring effective low-frequency vibration isolation.

An **integrated leveling system** facilitates height adjustment and accurate leveling of the equipment during installation.

The 4V-SR Spring Isolator is supplied as standard with a **Sylomer® base**, which complements the action of the springs by reducing the transmission of **mid and high frequencies that may propagate through the steel springs**. The **springs + Sylomer® combination** therefore provides effective vibration isolation over a broader frequency range.

Drawings


4V-SR

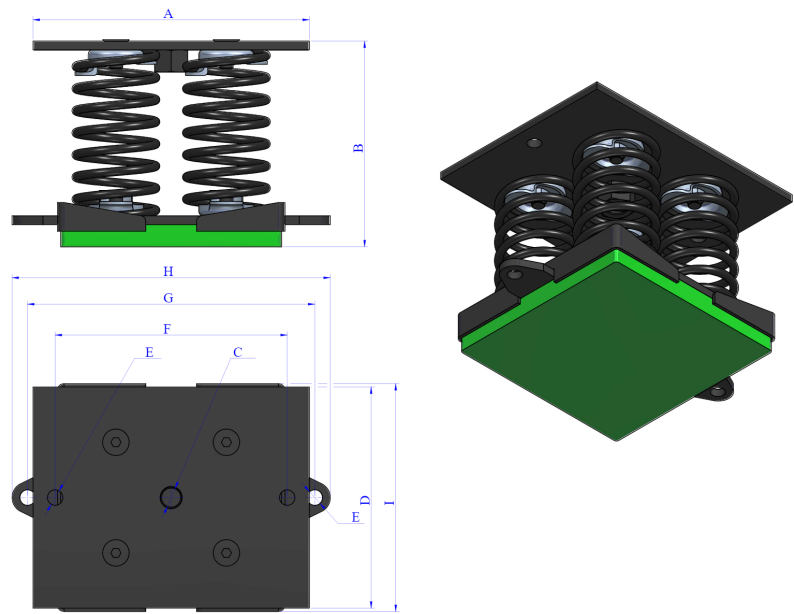

Type	Code	Max. Load (lbs)	Spring color	K(N/mm)	A(in)	B(in)	C(in)	D(in)	E(in)	F(in)	G(in)	H(in)	I(in)	Weight(lbs)
4V-SR	21326	1763	BLACK	256	9.84	7.09	M20	7.87	0.55	8.27	10.24	11.34	8.11	28
	21327	3526	BLACK	535	9.84	7.09	M20	7.87	0.55	8.27	10.24	11.34	8.11	23
	21081	5730	BLACK	724	9.84	7.09	M20	7.87	0.55	8.27	10.24	11.34	8.11	29
	21082	7053	BLACK	1149	9.84	7.09	M20	7.87	0.55	8.27	10.24	11.34	8.11	30
	21083	8816	BLACK	1404	9.84	7.09	M20	7.87	0.55	8.27	10.24	11.34	8.11	30
	21084	10579	BLACK	2013	9.84	7.09	M20	7.87	0.55	8.27	10.24	11.34	8.11	31

Elastic properties

LOAD DEFLECTION GRAPH
AMC MECANOCAUCHO® 4V-SR

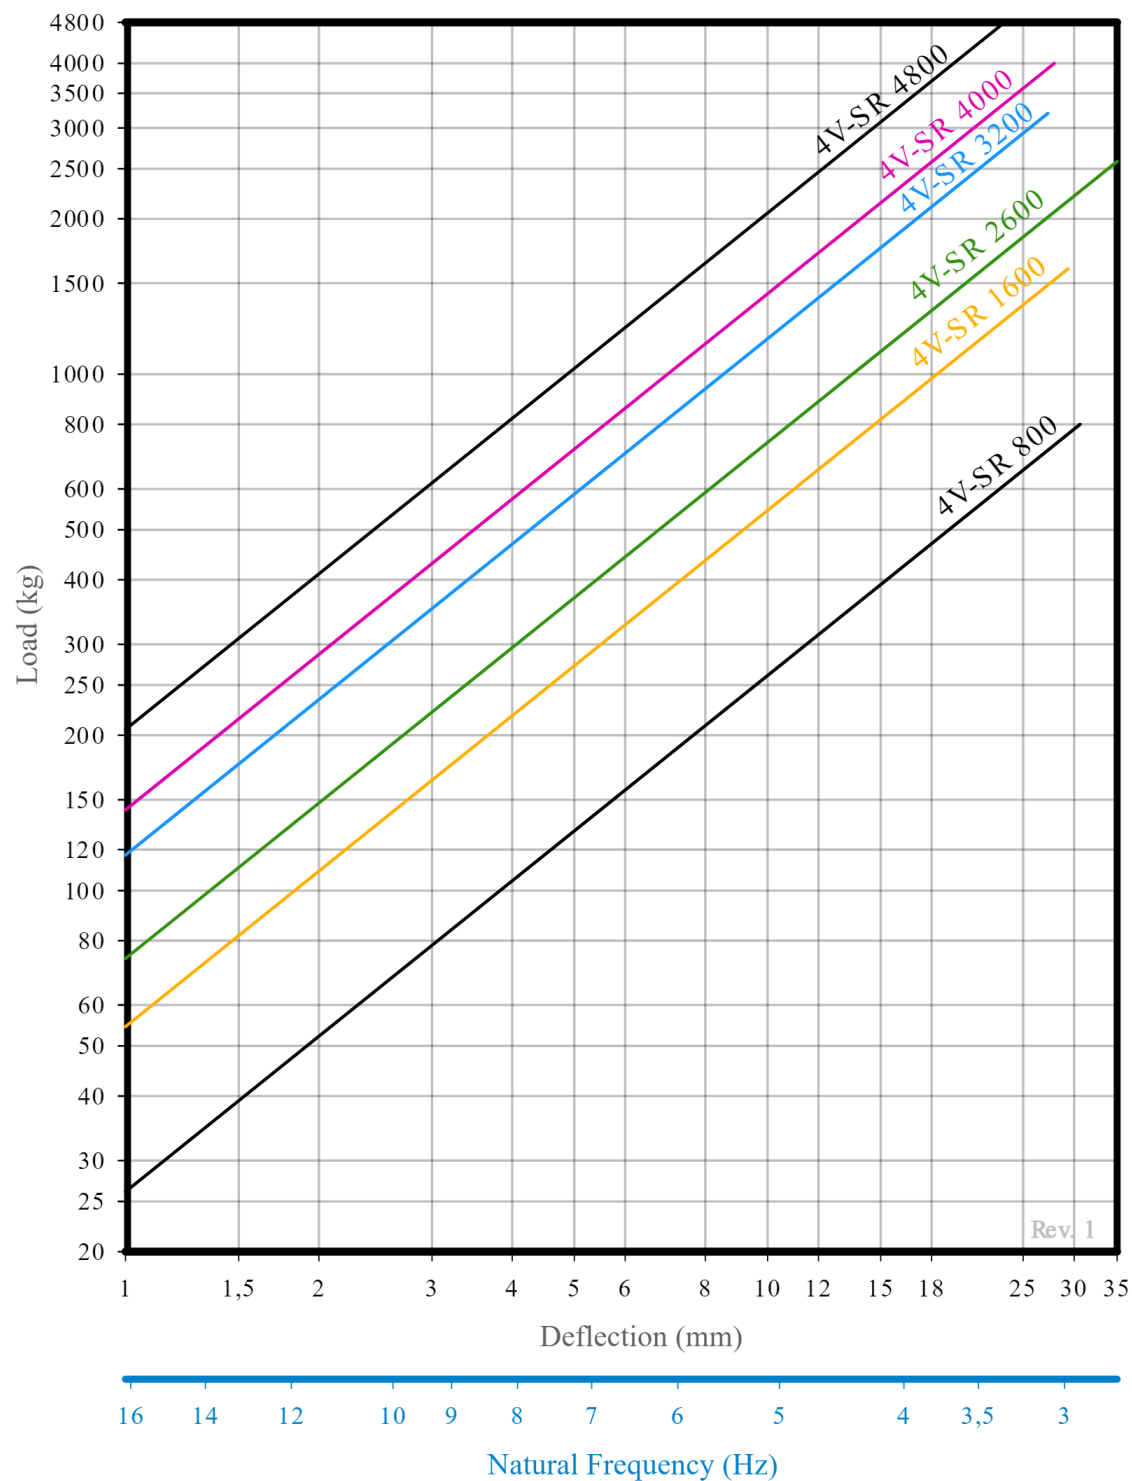

Technical characteristics

The mounts are able to reach low natural frequencies from 3 to 5 Hz. The spring combined with sylomer® is able to provide high isolation at low and medium frequencies.

The curves are showing the deflection and natural frequencies according to the load of the spring. Temperature working range from -30 to 70°. Short term higher temperatures are possible.