VT NT Hanger

VT NT spring hanger with NT fastening for suspended ceilings and machinery. Exceptional low-frequency vibration isolation.



AMC-MECANOCAUCHO® VT NT Hangers range is a range designed for suspension of acoustic ceilings and machinery that requires a very high isolation level.

These hangers are made of a high mechanical performance spring and incorporate a rubber bush conceived to avoid the acoustic bridges and the contact of a non aligned screw.

The metallic structure is very robust and it is supplied with an anti-corrosive zinc-plated coat.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13


sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 19/11/2026.

Drawings

VT NT 8 / VT NT 15 / VT NT 25 / VT NT 50 / VT NT 75 / VT NT 100 / VT NT 125 / VT NT 150R / VT NT 150 / VT NT 200 / VT NT 250 / VT NT 350 / VT NT 500 / VT NT 750

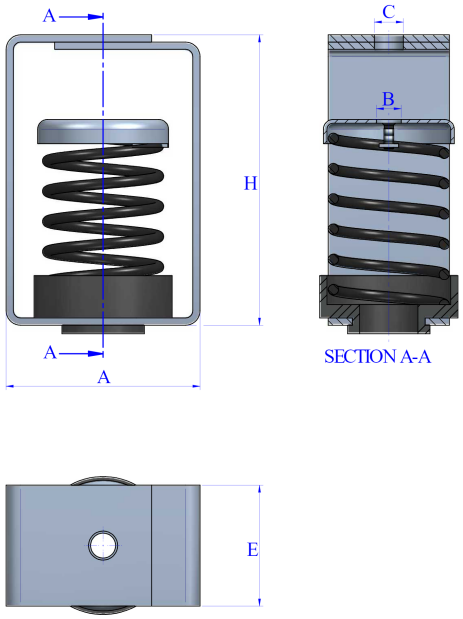

Type	Max. Permanent Load (kg)	Spring color	A(mm)	C(mm)	E(mm)	H(mm)	Code	B(mm)	Weight(kg)
VT NT 8	8	BLACK	80	12	50	120	20248	10,3	0.585
VT NT 15	15	BLACK	80	12	50	120	20273	10,3	0.64
VT NT 25	25	BLACK	80	12	50	120	20261	10,3	0.71
VT NT 50	50	BLUE	80	12	50	120	20262	10,3	0.7
VT NT 75	75	GREY	80	12	50	120	20263	10,3	0.72
VT NT 100	100	BEIGE	80	12	50	120	20264	10,3	0.778
VT NT 125	125	WHITE	80	12	50	120	20265	10,3	1.102
VT NT 150R	150	BLACK	80	12	50	120	20275	10,3	0.8
VT NT 150	150	BLUE	120	16	80	160	20266	16,2	2.079
VT NT 200	200	WHITE	120	16	80	160	20268	16,2	2.148
VT NT 250	250	BLACK	120	16	80	160	20269	16,2	2.148
VT NT 350	350	CREAM	120	16	80	160	20270	16,2	2.33
VT NT 500	500	LIGHT GREY	140	16	100	180	20267	16,8	4.614
VT NT 750	750	GREEN	140	16	100	180	20271	16,8	5.249


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 19/11/2026.


Elastic properties

LOAD DEFLECTION GRAPHS

AMC MECANOCAUCHO® VT NT 8 - VT NT 150R

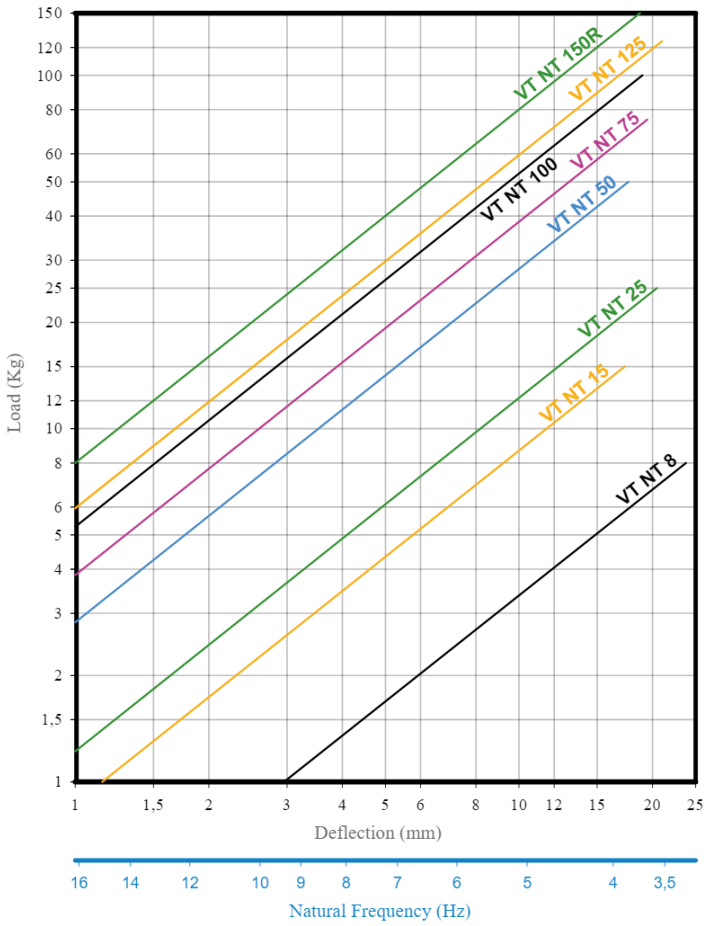

AMC MECANOCAUCHO® VT NT 150 - VT NT 750

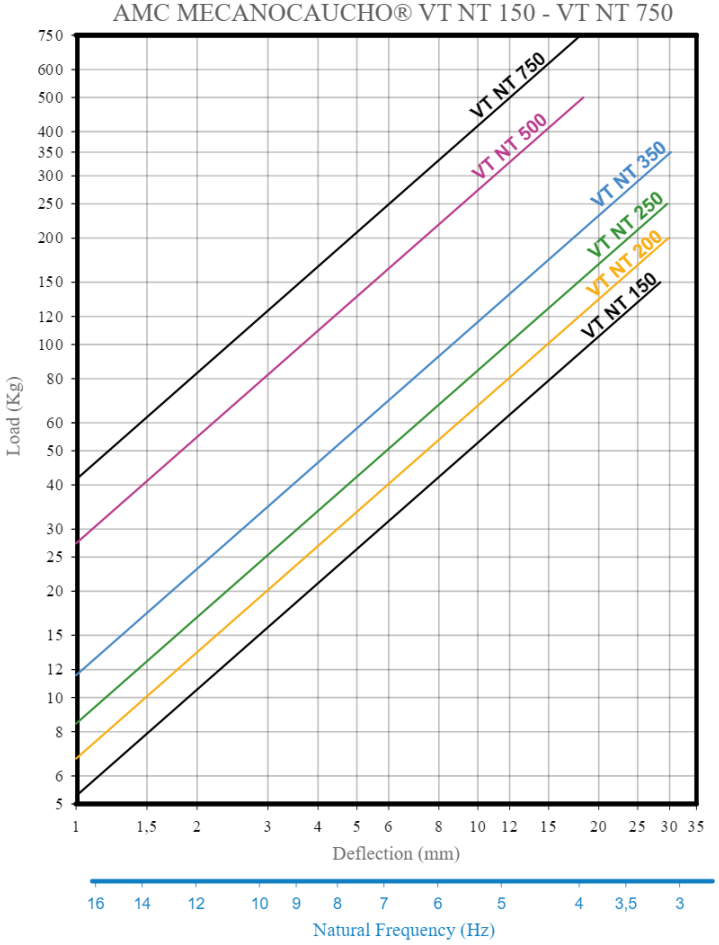

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 19/11/2026.

Technical characteristics

NEVER METAL TO METAL CONTACT

The hanger has a clearance that allows the threaded rod to swing within a 35° angle envelope to absorb irregularities in the ceiling.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain

Tel.: +34 843 74 00 13

sales@amcsa.es

www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 19/11/2026.