

Akustik Wall Up +Sylomer®

Resilient support for the acoustic decoupling of the top track of wall assemblies. Combination of rubber and Sylomer® for effective isolation over a wide frequency range.



The **Akustik Wall Up + Sylomer®** is designed to provide **acoustic decoupling at the top of wall assemblies**, creating a resilient connection between the metal framing and the ceiling.


The system combines **rubber and Sylomer®** to optimize dynamic behavior and reduce the transmission of vibrations and **structure-borne sound over a wide frequency range**.

Installed at the **top track of the framing**, it prevents a rigid connection with the supporting structure and helps **minimize acoustic bridges**, while maintaining the support and stability of the wall assembly.

Its robust and compact design facilitates installation and makes it particularly suitable for **high wall assemblies, studios, auditoriums, residential buildings, and soundproofing projects** requiring effective decoupling of the framing.


Drawings

Wall Up + Sylomer

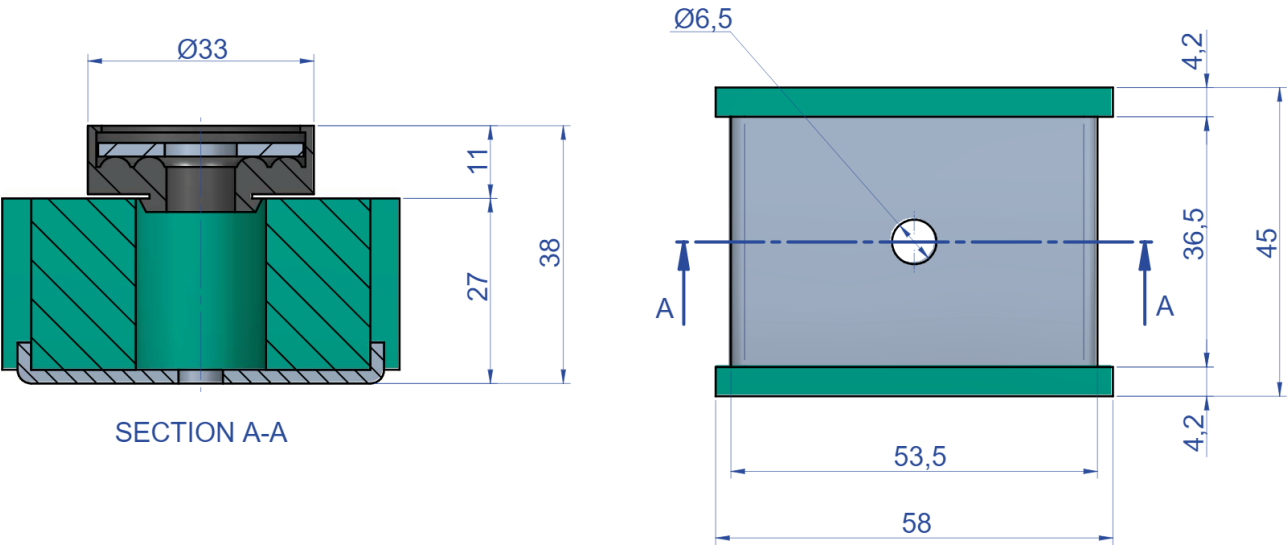


Type	Max. Load (lbs)	Code	Weight(lbs)
Wall Up + Sylomer	88	23836	0.27

Elastic properties

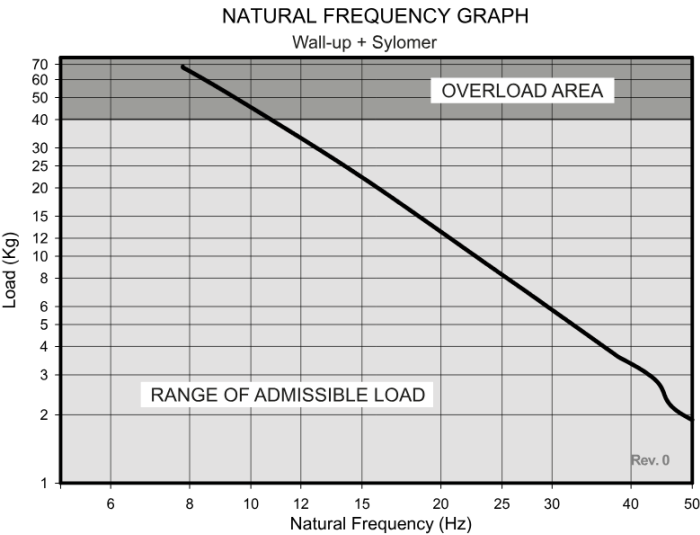

ZONA DE SOBRECARGA

RANGO DE CARGAS ADMISIBLES

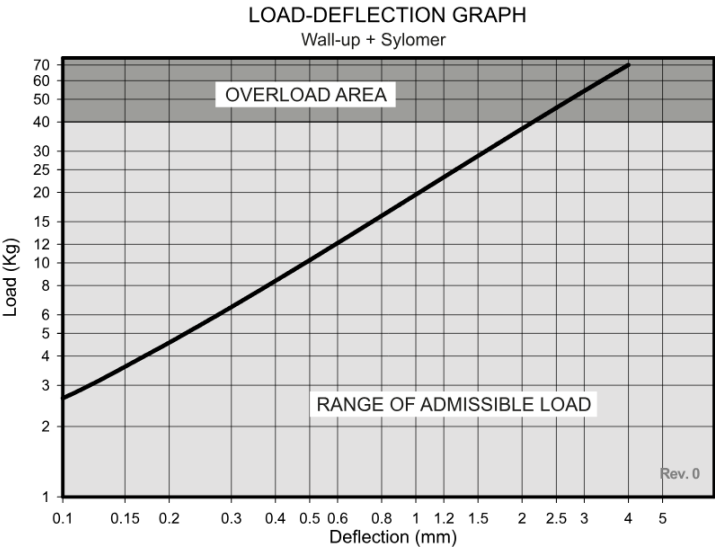

ZONA DE SOBRECARGA

RANGO DE CARGAS ADMISIBLES

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com