

EP 400 + Sylomer® Resilient Sway Brace

Resilient Sway Brace with two Sylomer® elements and metal bracket for attaching wall assembly frames. Effective isolation under tension, compression, and shear.



The **EP 400 + Sylomer® Resilient Sway Brace** is designed for the **acoustic decoupling of wall assemblies and their metal frames**, helping to reduce the transmission of vibrations and **structure-borne sound** to the supporting structure.


Its design combines **two Sylomer® resilient elements with a metal bracket**, allowing simple attachment of the frame while providing effective resilient decoupling. The sway brace can operate under **tension, compression, and shear**, making it particularly suitable for the different loads encountered in acoustic wall assemblies.

Its **robust, fail-safe metal construction** provides secure attachment and good mechanical strength. The Sylomer® provides optimized dynamic behavior, effectively reducing vibration transmission between the wall assembly and the supporting wall.

The EP 400 + Sylomer® is suitable for **studios, auditoriums, residential buildings, mechanical rooms, and soundproofing projects** requiring high-performance acoustic wall assemblies and effective decoupling of the supporting frame.

Drawings


EP 400 + Sylomer

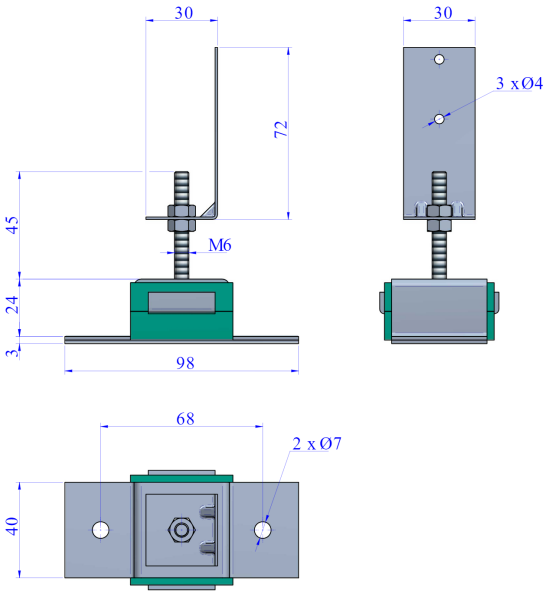


Type	SUMMARY	Max. Load (lbs)	Code	Weight(lbs)
EP 400 + Sylomer	It is secured to the wall by means of two holes. It has a male M6 metal insert and also an "L" welded nut for securing to the profile.	66	23705	0.42

Elastic properties

LOAD DEFLECTION GRAPH
EP Akustik+Sylomer®

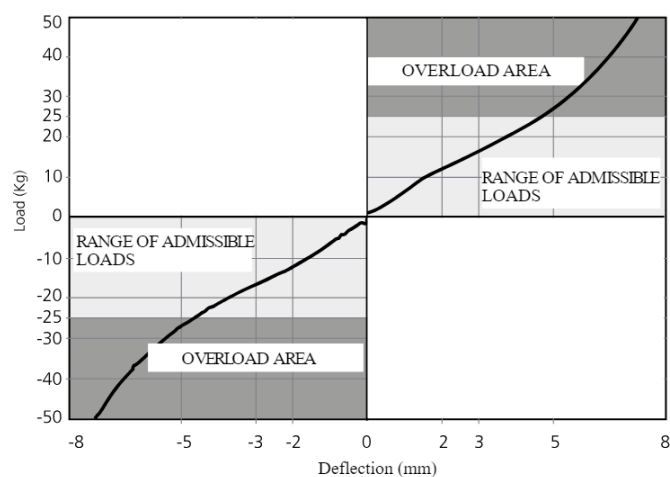

NATURAL FREQUENCY GRAPH
EP Akustik+Sylomer®

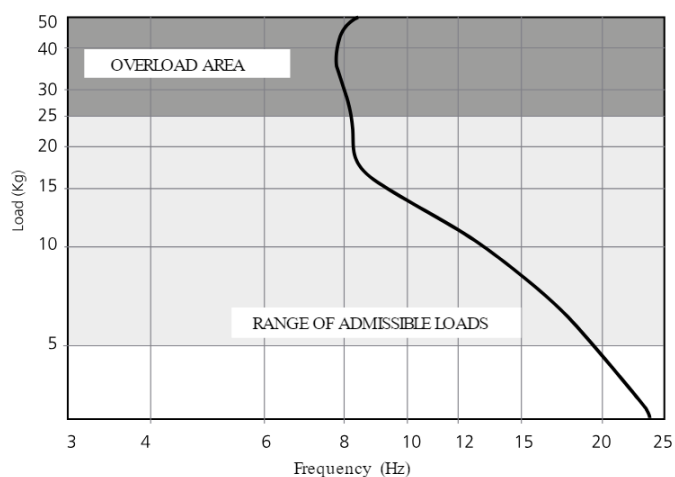

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com