

EP 500 + Sylomer® Resilient Wall Mount

Resilient wall mount with Sylomer® for acoustic decoupling of the bottom track of wall lining systems. Direct floor fixing and simple installation of the frame.



The **EP 500 + Sylomer® Resilient Wall Mount** is designed for **acoustic decoupling at the base of wall linings and partitions**, creating a resilient connection between the frame and the floor.


The mount is fixed directly to the floor and allows the **bottom track of the metal frame** to be securely attached. The Sylomer® element reduces the transmission of vibrations and **structure-borne sound** between the wall lining and the supporting structure, avoiding a direct rigid connection with the floor.

Its compact design facilitates integration into wall lining systems and provides **resilient decoupling of the frame**, particularly where high acoustic performance is required.

The EP 500 + Sylomer® is particularly suitable for **studios, residential buildings, auditoriums, plant rooms and soundproofing projects**, in both new-build and refurbishment applications.


Drawings

EP 500 + Sylomer s35

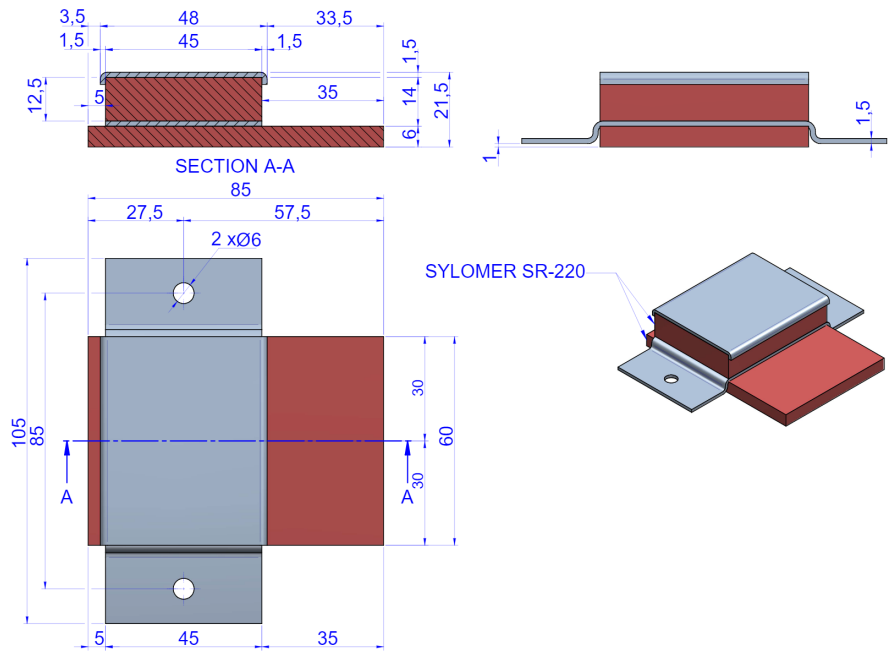



Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
EP 500 + Sylomer s35	They are secured by two "predrilled" and easy-to-cut pins to facilitate their installation.	60	23715	0.141

EP 500 + Sylomer s65

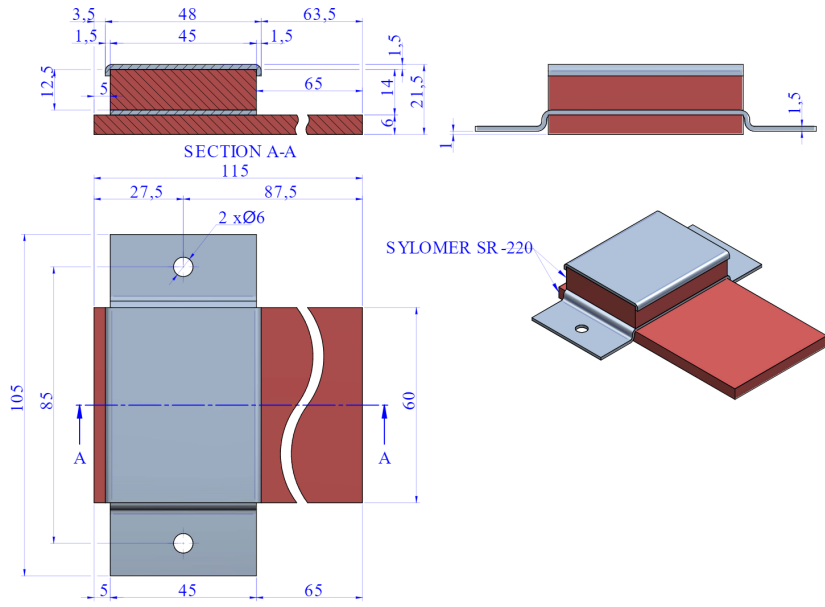

Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
EP 500 + Sylomer s65	They are secured by two "predrilled" and easy-to-cut pins to facilitate their installation.	60	23716	0.147

Elastic properties

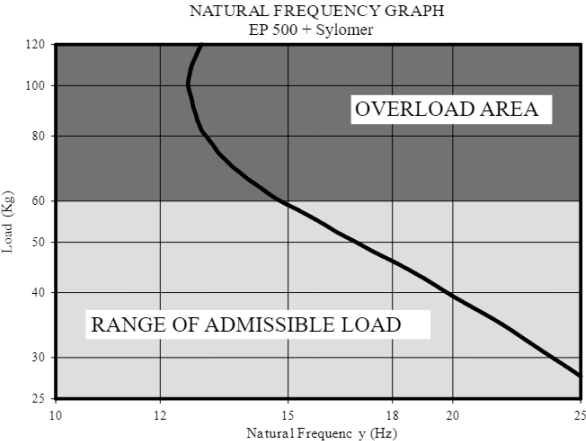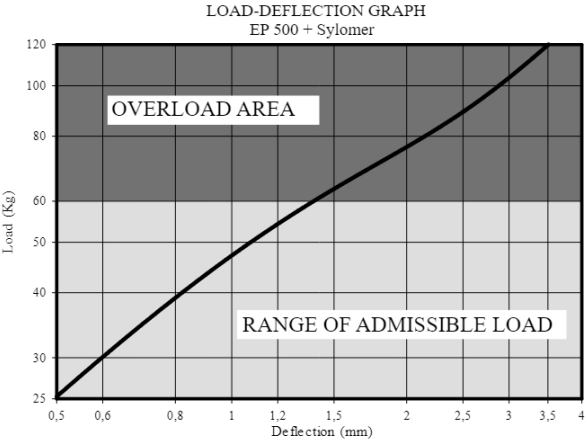

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com