EP 500 + Sylomer® Resilient Wall Mount

Resilient wall mount with Sylomer® for acoustic decoupling of the bottom track of wall lining systems. Direct floor fixing and simple installation of the frame.



The **EP 500 + Sylomer® Resilient Wall Mount** is designed for **acoustic decoupling at the base of wall linings and partitions**, creating a resilient connection between the frame and the floor.

The mount is fixed directly to the floor and allows the **bottom track of the metal frame** to be securely attached. The Sylomer® element reduces the transmission of vibrations and **structure-borne sound** between the wall lining and the supporting structure, avoiding a direct rigid connection with the floor.

Its compact design facilitates integration into wall lining systems and provides **resilient decoupling of the frame**, particularly where high acoustic performance is required.


The EP 500 + Sylomer® is particularly suitable for **studios, residential buildings, auditoriums, plant rooms and soundproofing projects**, in both new-build and refurbishment applications.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.


Drawings

EP 500 + Sylomer s35

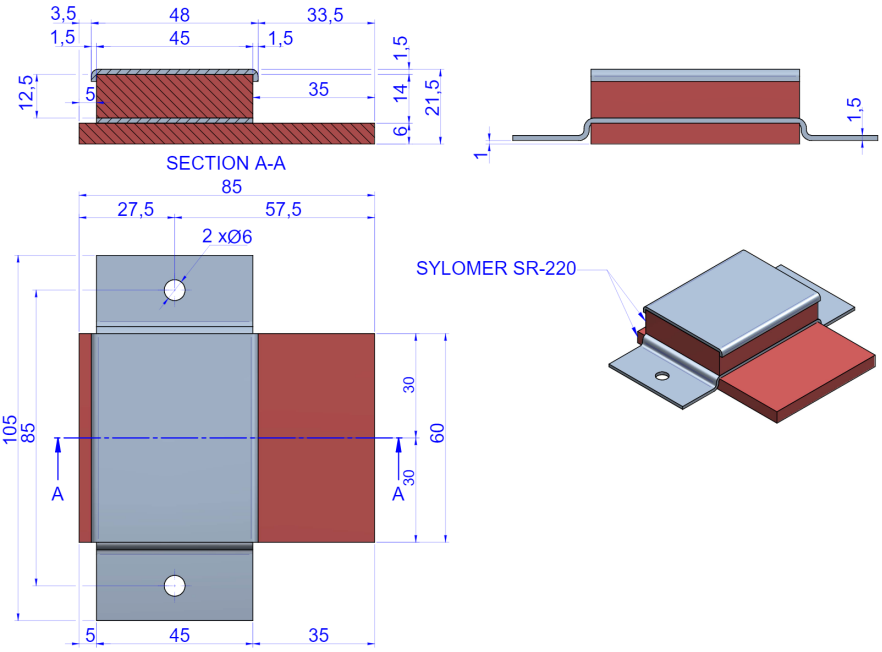

Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
EP 500 + Sylomer s35	They are secured by two “predrilled” and easy-to-cut pins to facilitate their installation.	60	23715	0.141

EP 500 + Sylomer s65

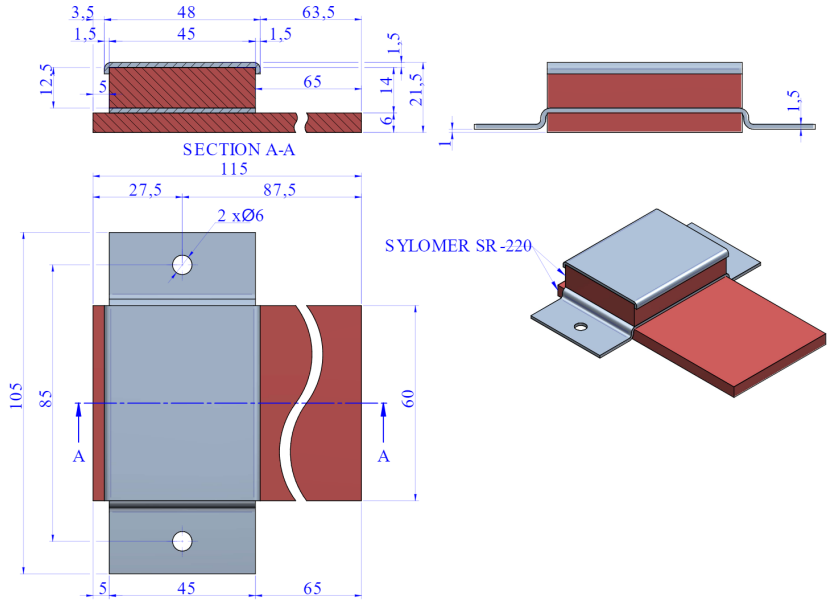



Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
EP 500 + Sylomer s65	They are secured by two “predrilled” and easy-to-cut pins to facilitate their installation.	60	23716	0.147

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Elastic properties

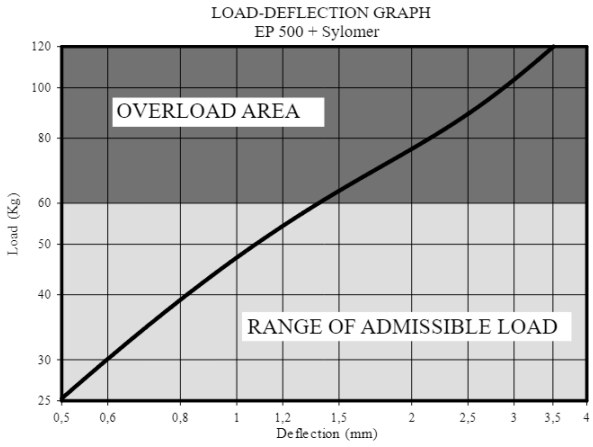

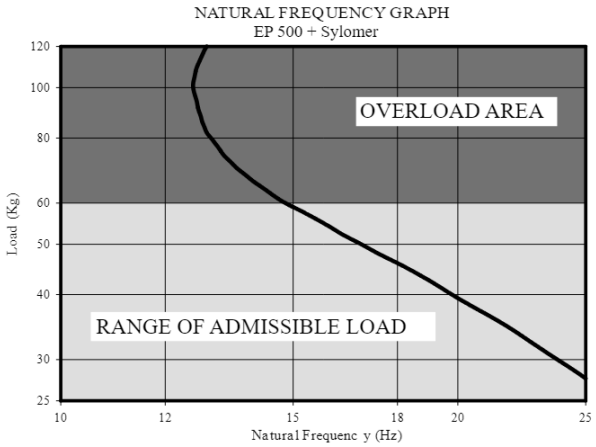

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.

Advantages

Easy Installation

This mount requires minimal structural modifications, making installation quick and straightforward.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

Improved isolation

It offers improved isolation compared with conventional anti-vibration mounts of similar geometry.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalogue without prior notice.
Document generated on 15/11/2026.