

EP 500 + Sylomer® Resilient Wall Mount

Resilient wall mount with Sylomer® for acoustic decoupling of the bottom track of wall assemblies. Direct floor attachment and simple installation of the metal framing.



The **EP 500 + Sylomer® Resilient Wall Mount** is designed for **acoustic decoupling at the base of wall assemblies and partitions**, creating a resilient connection between the framing and the floor.


The mount attaches directly to the floor and allows the **bottom track of the metal framing** to be securely attached. The Sylomer® element reduces the transmission of vibrations and **structure-borne sound** between the wall assembly and the supporting structure, avoiding a direct rigid connection with the floor.

Its compact design facilitates integration into wall assemblies and provides **resilient decoupling of the framing**, particularly where high acoustic performance is required.

The EP 500 + Sylomer® is particularly suitable for **studios, residential buildings, auditoriums, mechanical rooms and soundproofing projects**, in both new construction and renovation applications.


Drawings

EP 500 + Sylomer s35

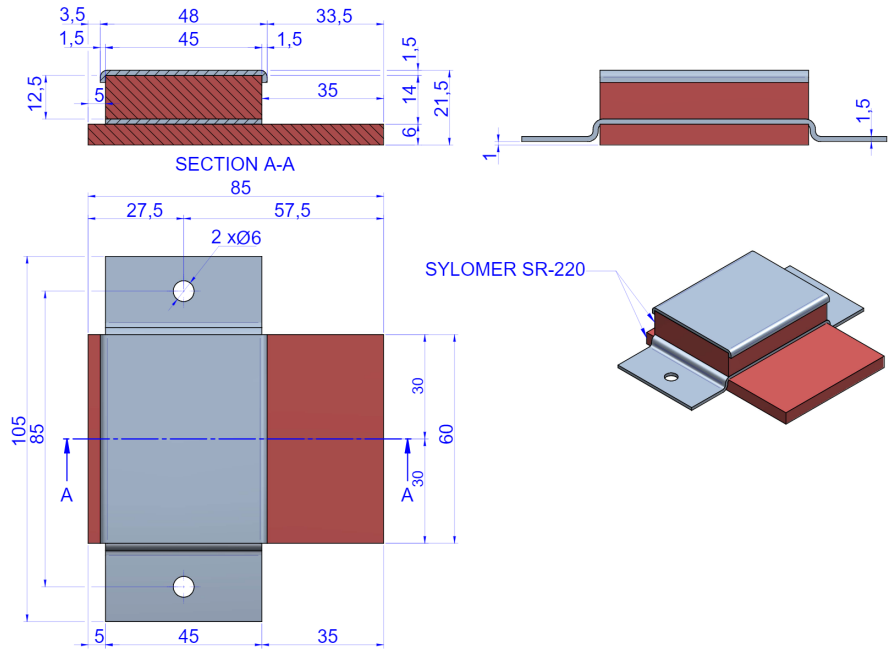



Type	SUMMARY	Max. Load (lbs)	Code	Weight(lbs)
EP 500 + Sylomer s35	They are secured by two "predrilled" and easy-to-cut pins to facilitate their installation.	132	23715	0.31

EP 500 + Sylomer s65

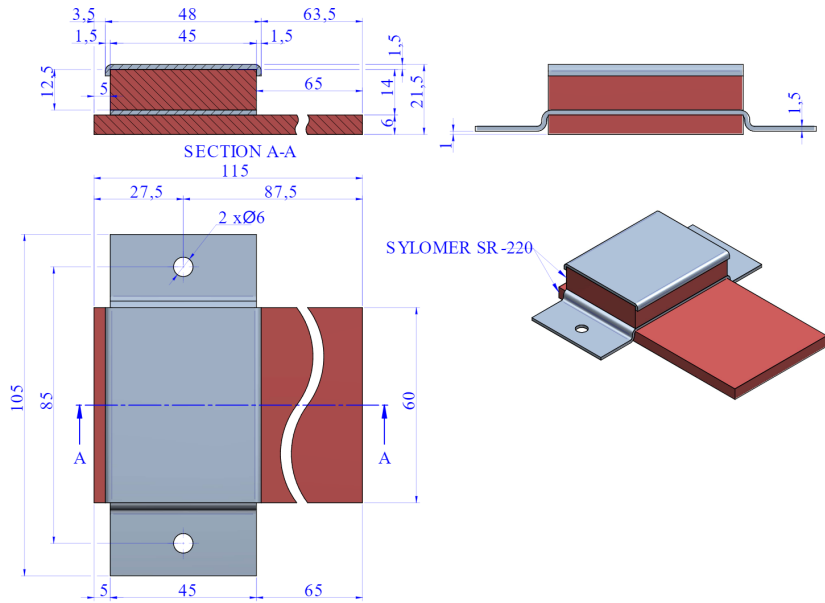

Type	SUMMARY	Max. Load (lbs)	Code	Weight(lbs)
EP 500 + Sylomer s65	They are secured by two "predrilled" and easy-to-cut pins to facilitate their installation.	132	23716	0.32

Elastic properties

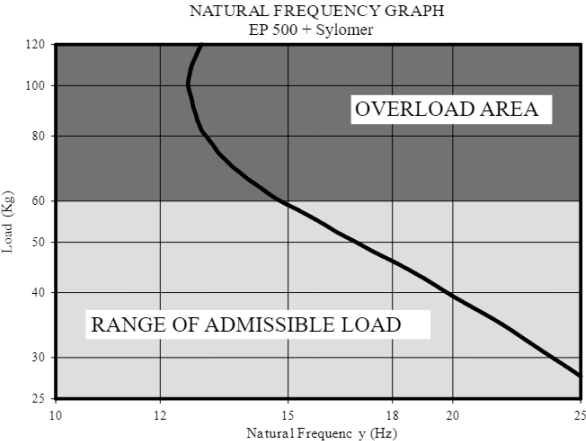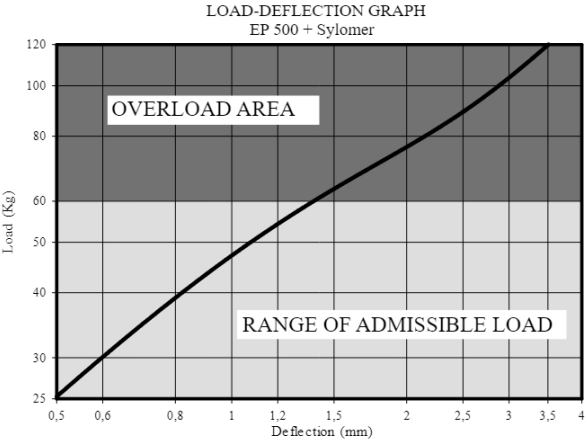

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com