


EP 600 + Sylomer® Resilient Wall Tie

Resilient wall tie with Sylomer® for the acoustic decoupling of wall lining frames. Reduces acoustic bridges and the transmission of structure-borne sound.

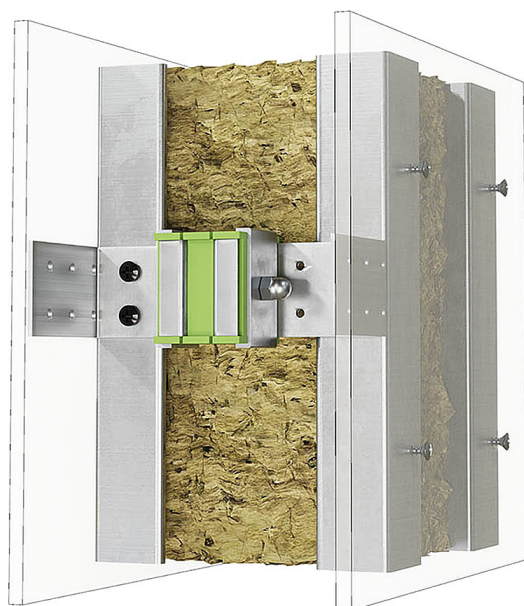

The **EP 600 + Sylomer® Resilient Wall Tie** is designed for the **acoustic decoupling of wall linings and their metal frames**, creating a resilient connection between the frame and the supporting wall.


The **Sylomer® elements** provide resilient decoupling of the frame, effectively reducing the transmission of vibrations and **structure-borne sound**, while minimising acoustic bridges at the fixing points.

Its design provides a **simple and robust connection for the metal frame** while maintaining the resilient decoupling required to achieve high acoustic performance. The elastic properties of Sylomer® also ensure stable and durable performance over time.

The EP 600 + Sylomer® is particularly suitable for **studios, residential buildings, auditoriums, plant rooms and soundproofing projects**, in both new-build and refurbishment applications.





Drawings

EP 600 + Sylomer

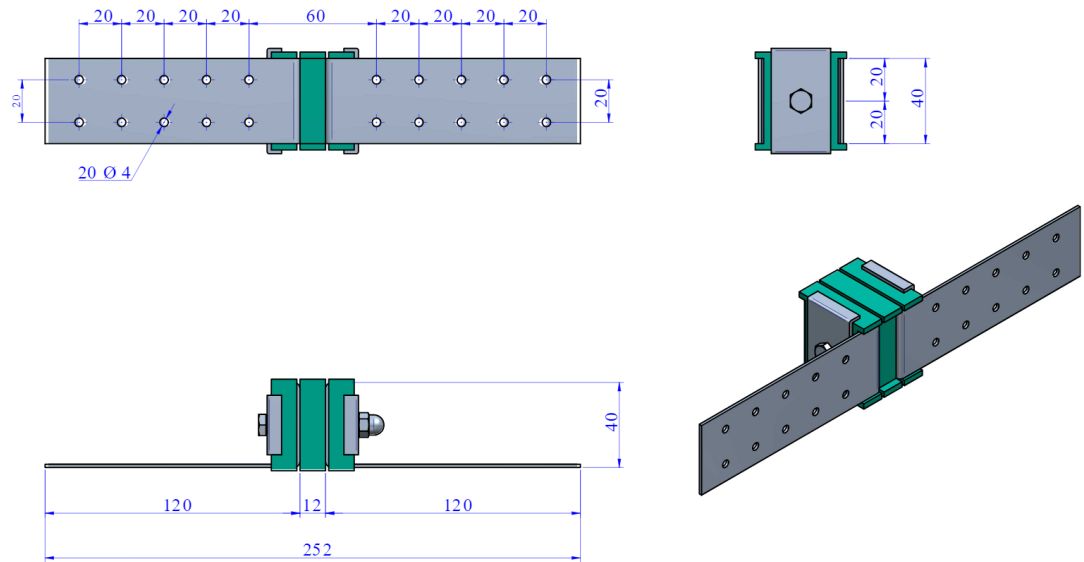

Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
EP 600 + Sylomer	They are secured by two "predrilled" and easy-to-cut pins to facilitate their installation.	30	23707	0.24


EP 650 + Sylomer

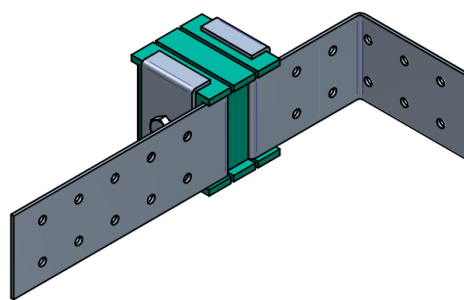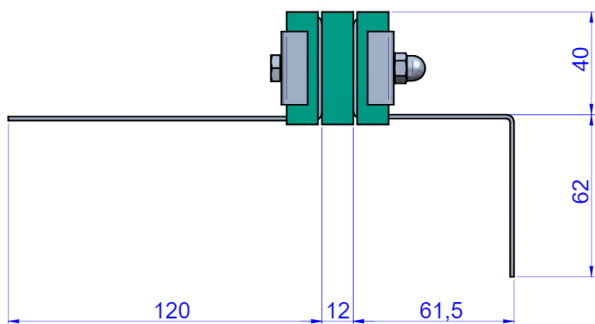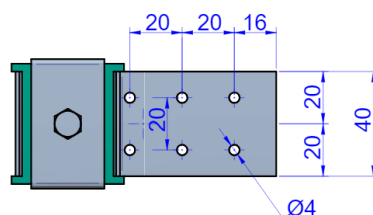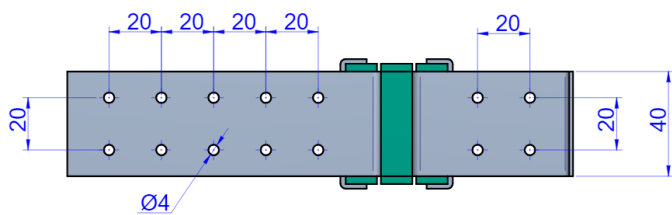


Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
EP 650 + Sylomer	They are secured by two “predrilled” and bent pins to facilitate their installation. This principle can be used to make a wide range of variants. Contact us if you require a product more adapted to your building technique.	30	23709	0.24

Elastic properties

LOAD DEFLECTION GRAPH
EP Akustik+Sylomer®

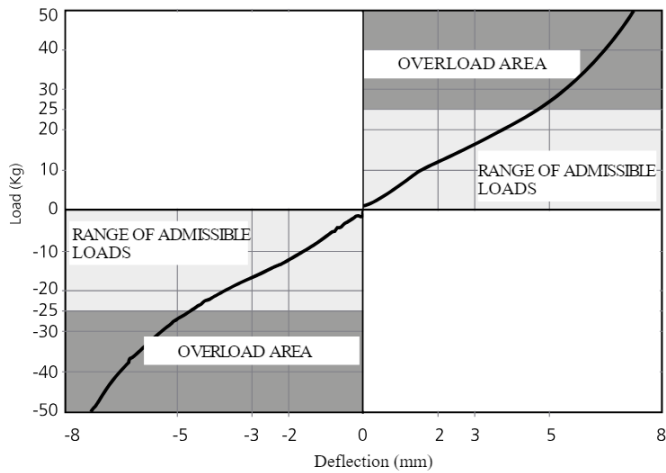

NATURAL FREQUENCY GRAPH
EP Akustik+Sylomer®

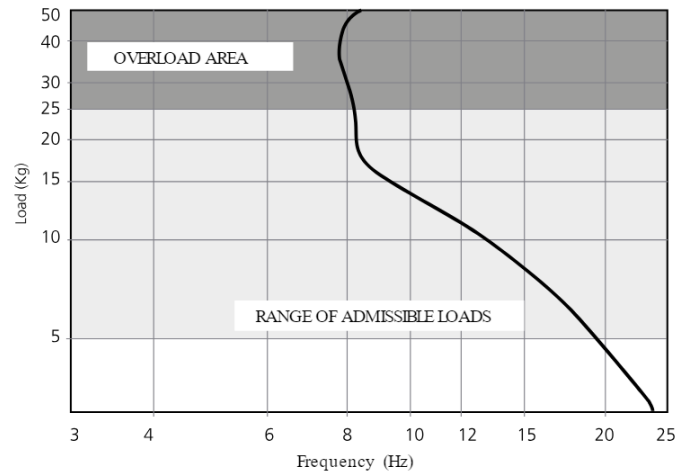

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com