


EP 600 + Sylomer® Resilient Sway Brace

Resilient sway brace with Sylomer® for the acoustic decoupling of wall framing. Reduces acoustic bridges and the transmission of structure-borne sound.

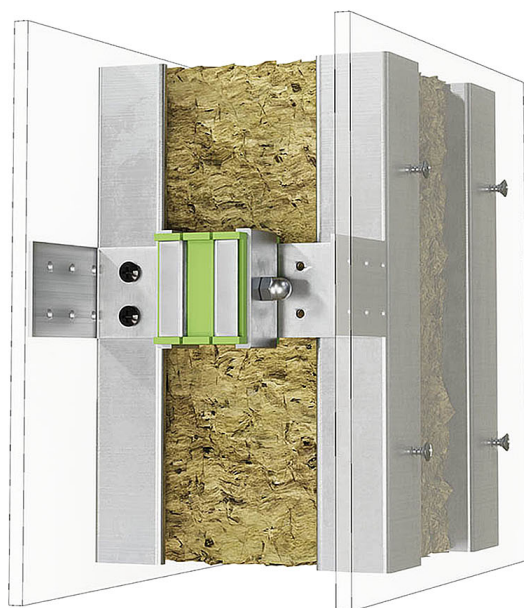

The **EP 600 + Sylomer® Resilient Sway Brace** is designed for the **acoustic decoupling of wall assemblies and their metal framing**, creating a resilient connection between the framing and the supporting wall.


The **Sylomer® elements** provide resilient decoupling of the framing, effectively reducing the transmission of vibrations and **structure-borne sound**, while minimizing acoustic bridges at the attachment points.

Its design provides a **simple and robust connection for the metal framing** while maintaining the resilient decoupling required to achieve high acoustic performance. The elastic properties of Sylomer® also ensure stable and durable performance over time.

The EP 600 + Sylomer® is particularly suitable for **studios, residential buildings, auditoriums, mechanical rooms and soundproofing projects**, in both new construction and renovation applications.


Drawings

EP 600 + Sylomer

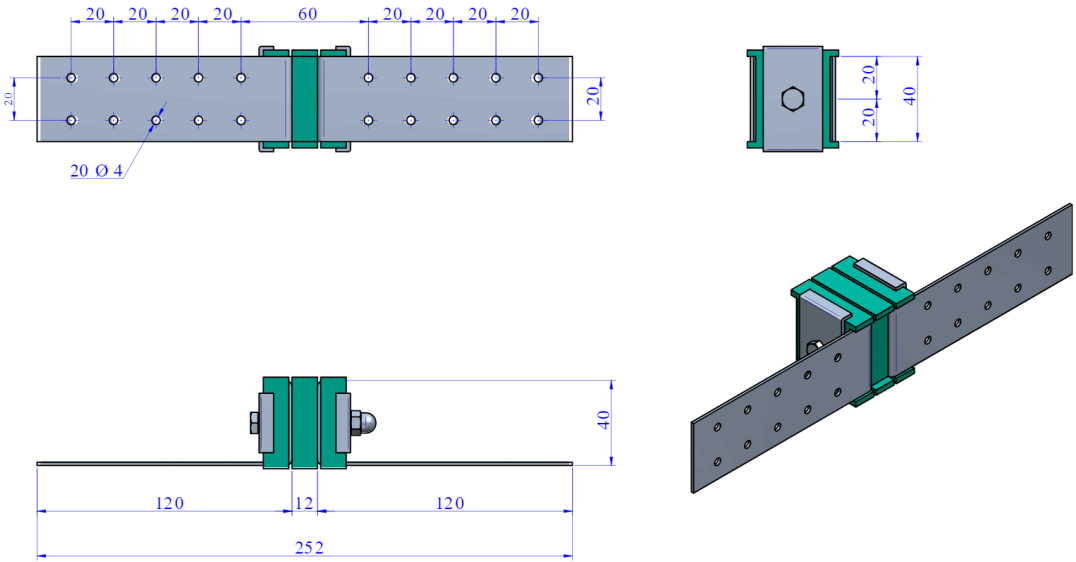

Type	SUMMARY	Max. Load (lbs)	Code	Weight(lbs)
EP 600 + Sylomer	They are secured by two "predrilled" and easy-to-cut pins to facilitate their installation.	66	23707	1


EP 650 + Sylomer

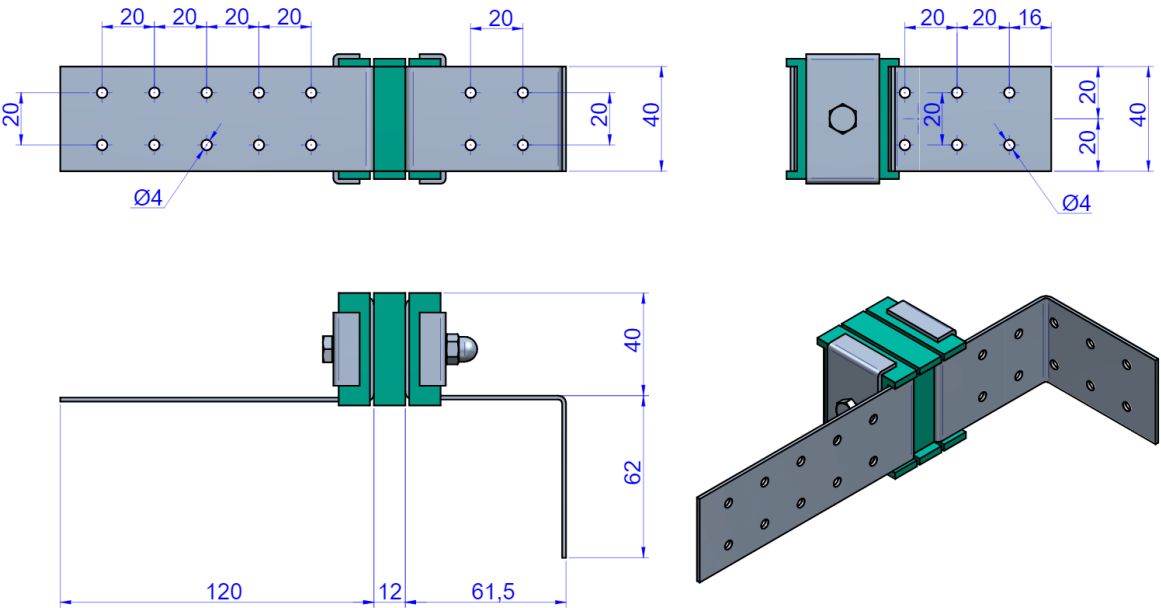


Type	SUMMARY	Max. Load (lbs)	Code	Weight(lbs)
EP 650 + Sylomer	They are secured by two "predrilled" and bent pins to facilitate their installation. This principle can be used to make a wide range of variants. Contact us if you require a product more adapted to your building technique.	66	23709	1

Elastic properties

LOAD DEFLECTION GRAPH
EP Akustik+Sylomer®

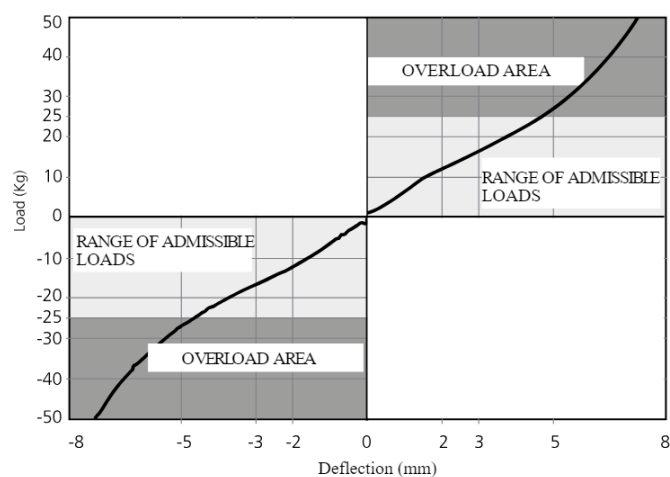

NATURAL FREQUENCY GRAPH
EP Akustik+Sylomer®

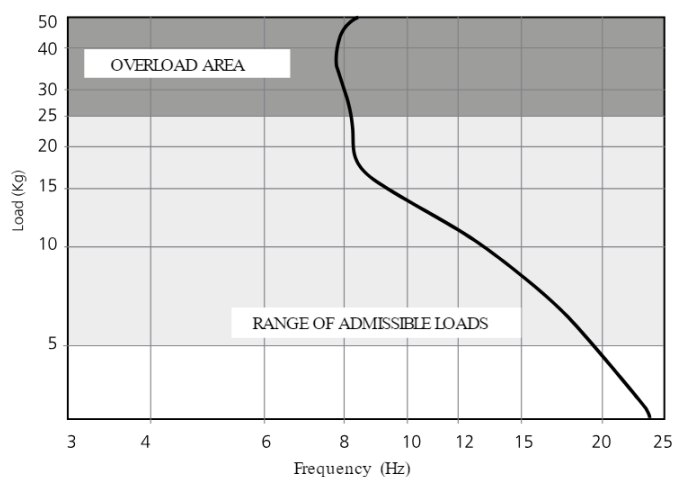

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com