


EP 700 +Sylomer®

Resilient Wall Tie with Sylomer® for direct attachment of wall assemblies and acoustic ceilings. Fast and compact installation without threaded rods.

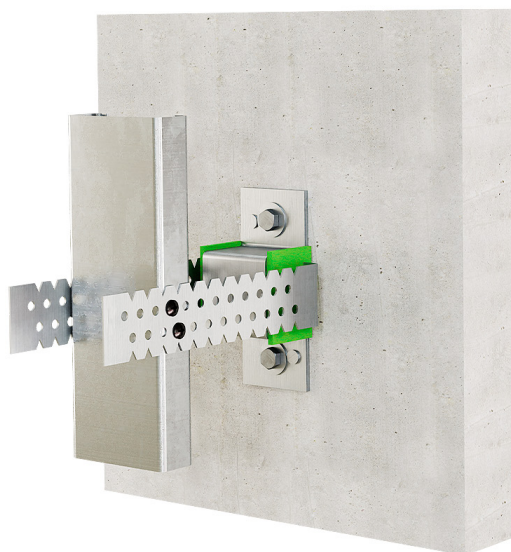

The **EP 700 + Sylomer® Resilient Wall Tie** is designed for the **acoustic decoupling of wall assemblies and ceilings**, helping to reduce the transmission of vibrations and **structure-borne sound** through the structure.


The **Sylomer® resilient element** provides effective decoupling between the supporting frame and the main structure, helping to improve the acoustic performance of the wall or ceiling.

Thanks to its **direct attachment without threaded rods**, the EP 700 + Sylomer® allows for simple, fast, and compact installation. It is particularly suitable for applications where **available installation height is limited**.

The Resilient Wall Tie is particularly suitable for **wood structures and ceilings**, where it can be attached directly using two screws, as well as for wall assemblies and acoustic ceilings requiring effective acoustic decoupling.


Drawings

EP 700 + Sylomer®15 / EP 700 + Sylomer 30 / EP 700 + Sylomer 75

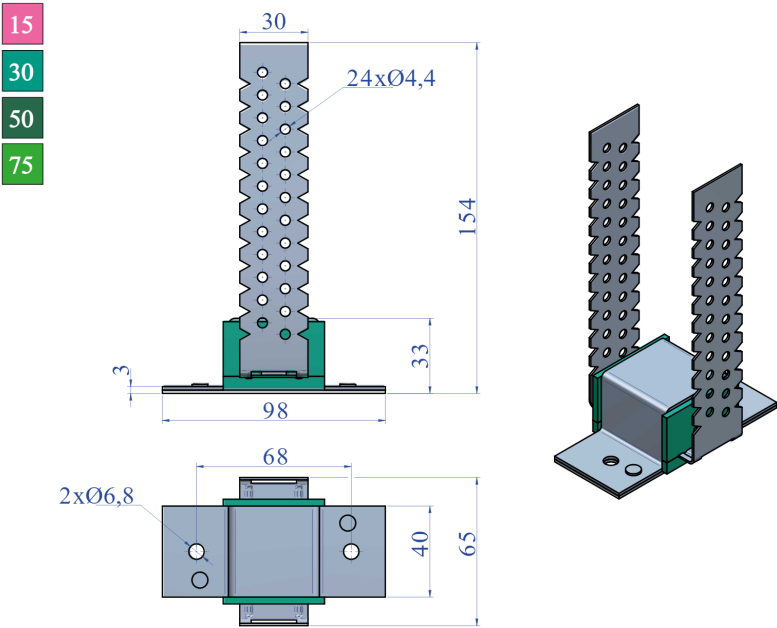

Type	Code	Max. Load(lbs)	Weight(lbs)
EP 700 + Sylomer®15	23727	33	0.44
EP 700 + Sylomer 30	23711	66	0.46
EP 700 + Sylomer 75	23712	165	0.48


EP 700 + sylomer 50

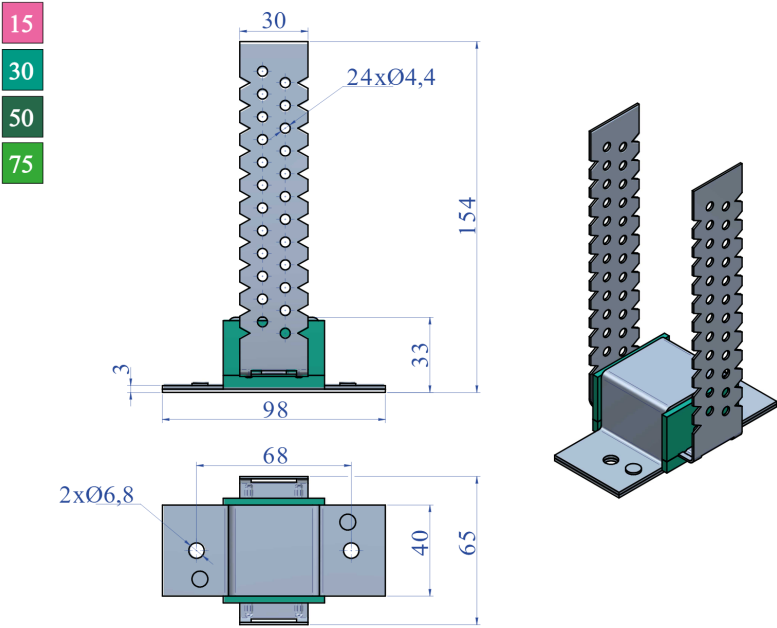


Type	SUMMARY	Code	Max. Load(lbs)	Weight(lbs)
EP 700 + sylomer 50	They are secured by two "predrilled" and bent pins to facilitate their installation. This principle can be used to make a wide range of variants. Contact us if you require a product more adapted to your building technique.	23728	242	1

Elastic properties

LOAD DEFLECTION GRAPHS

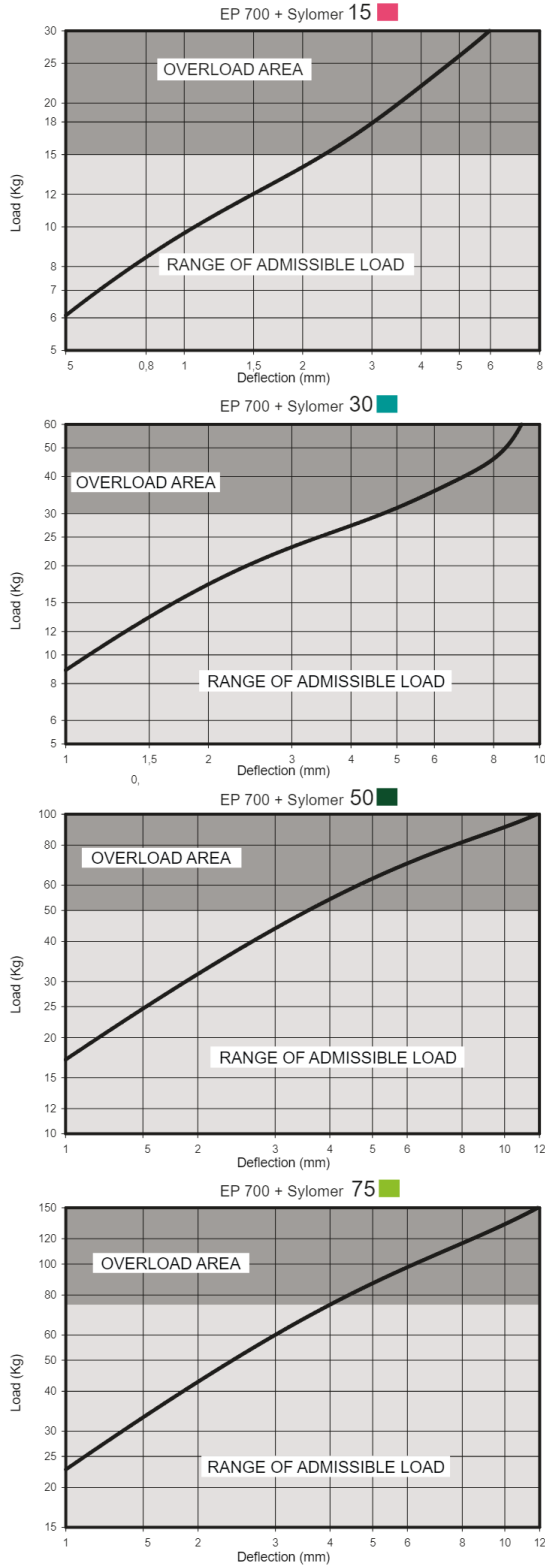

NATURAL FREQUENCY GRAPHS

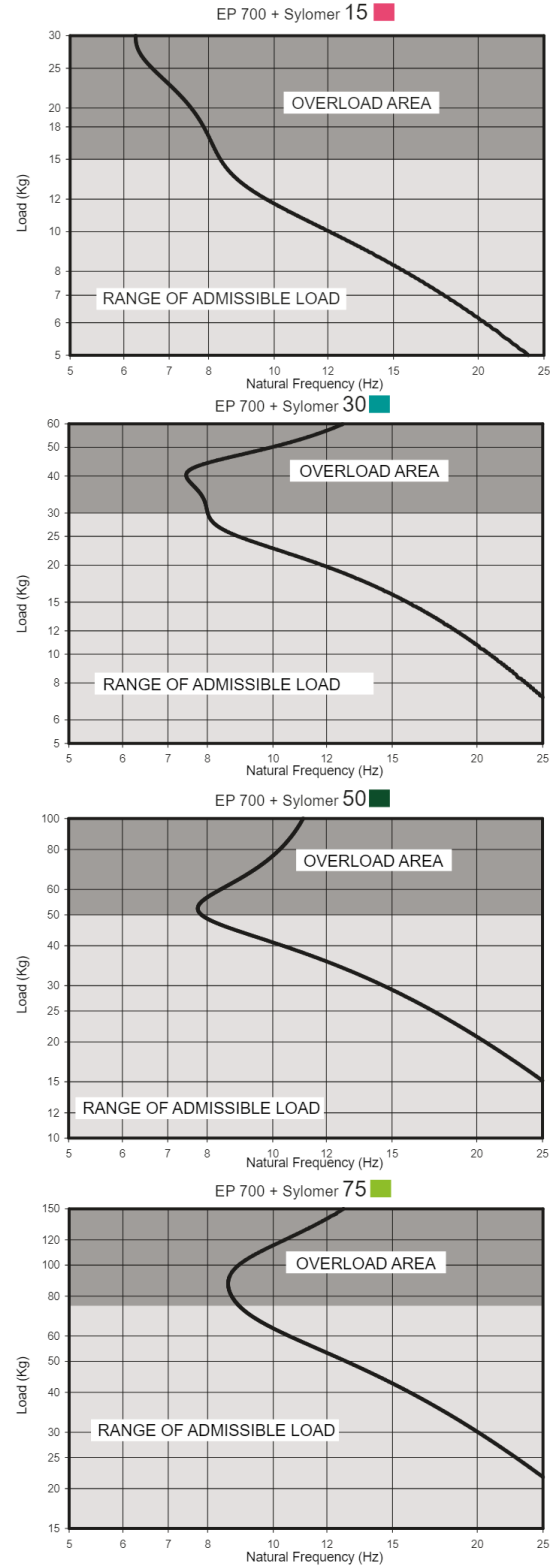

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com