

EP + Sylomer® LMR Resilient Wall Tie

Resilient Wall Tie with Sylomer® for the acoustic decoupling of wall linings. Two resilient elements with different characteristics accommodate a wide range of loads.



The **EP + Sylomer® LMR Resilient Wall Tie** is designed for the **acoustic decoupling of wall linings and their supporting frames**, reducing the transmission of vibrations and **structure-borne sound** through the structure.


Its design incorporates **two Sylomer® elements with different characteristics**, allowing its resilient behaviour to accommodate a wide range of loads while providing effective acoustic decoupling.

Its **robust metal construction** provides reliable fixing and good mechanical strength. The **fail-safe design** provides additional safety in applications subject to high mechanical requirements.

The EP + Sylomer® LMR can also be used for the **resilient decoupling of vertical pipework and lightweight ducts**, where the transmission of vibrations and structure-borne sound to the structure needs to be reduced.

Drawings


EP + Sylomer® LMR

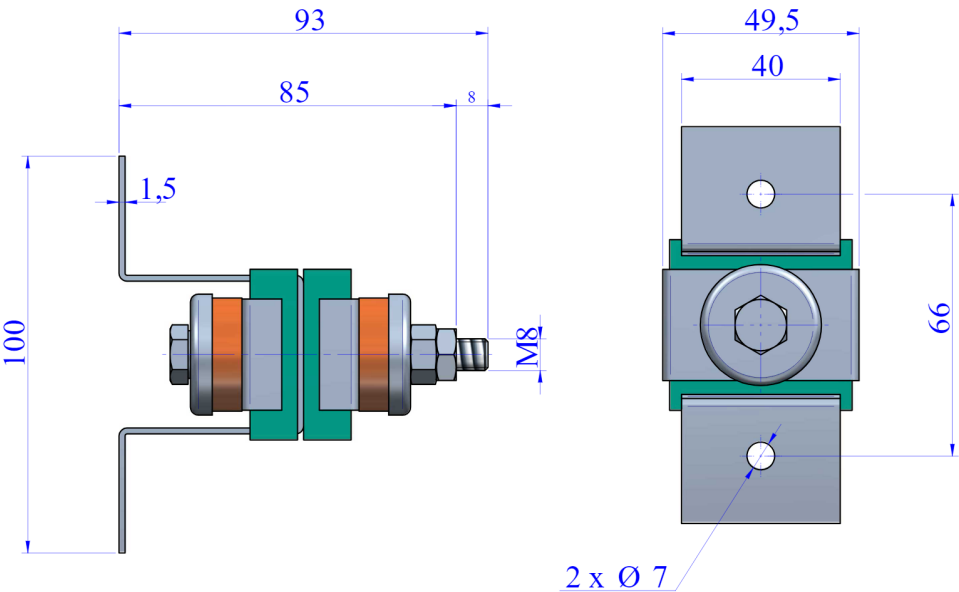


Type	Weight(kg)	Code
EP + Sylomer® LMR	0.233	23724

Elastic properties

LOAD-DEFLECTION CURVE
EP + SYLOMER LMR

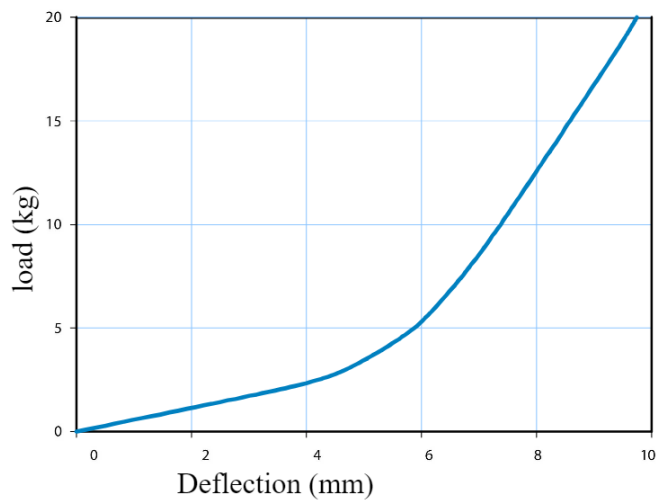

NATURAL FREQUENCY
EP + SYLOMER LMR

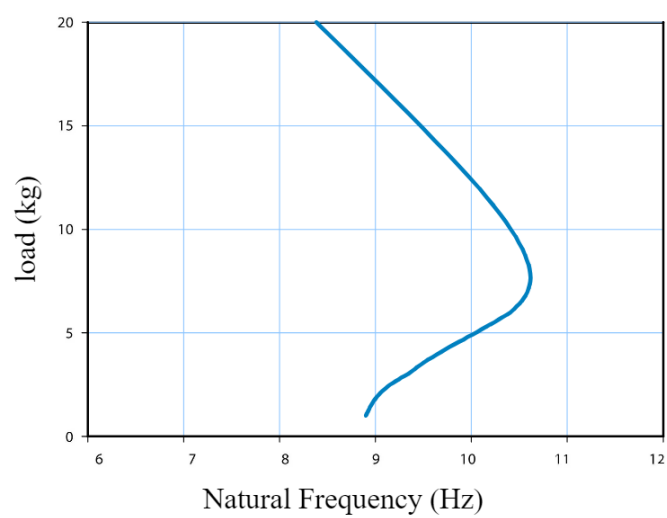

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com