

NF Adjustable Machine Mounts

Height-adjustable anti-vibration machine mounts with an oil-resistant NBR rubber pad, designed for installation without floor anchoring.



The **AMC-MECANOCAUCHO® NF Adjustable Machine Mounts** are designed to support and isolate **light and heavy industrial machinery** where **floor anchoring is not required**.

Their **height-adjustment system** allows the machine to be easily levelled while providing **elastic decoupling between the equipment and the floor**, helping to reduce the transmission of **vibration and structure-borne noise**.

NF mounts also incorporate a **tilting system** that allows them to accommodate **uneven or slightly inclined floors**, ensuring proper support of the machine.

The elastic element is manufactured from **nitrile butadiene rubber (NBR)**, providing **good resistance to oils** and making the mounts suitable for a wide range of industrial environments.

Drawings

NF-65 / NF-85 / NF-100 / NF-130 / NF-160 / NF-200 / NF-250

FIG. 1


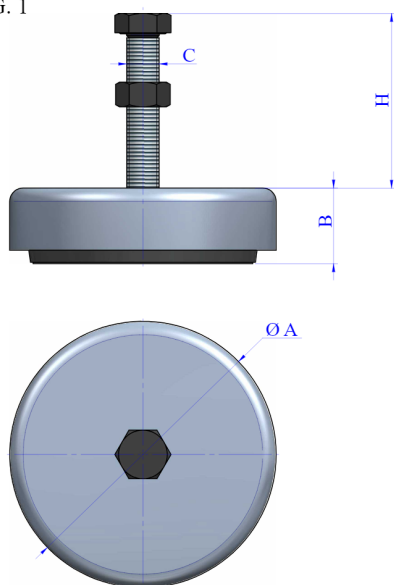


FIG. 2

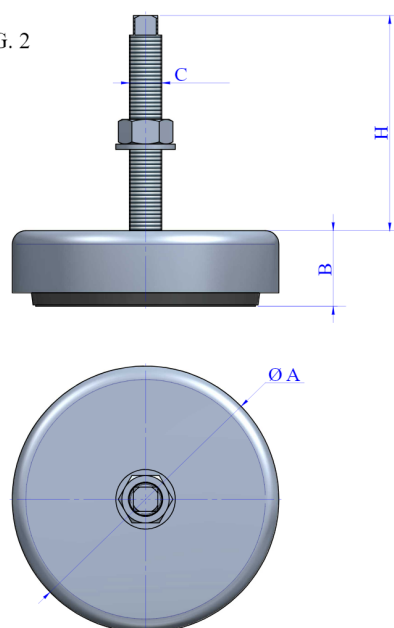

Type	Deflection(mm)	A(mm)	B Min.(mm)	B Max.(mm)	B (mm) Reglaje	Max. static load (Kg)	Weight(gr)	Code	C(mm)	H (mm) Min.	H (mm) Máx.	Fig.
NF-65	2	65	27	34	7	320	349	142001	M-12x1,75	105	110	1
								142017	M-12x1,75	78	85	2
NF-85	2	85	33	46	13	650	732	142002	M-16x2	114	127	1
								142018	M-16x2	82	95	2
NF-100	2	100	35	48	13	980	960	142003	M-16x2	120	130	1
								142019	M-16x2	82	95	2
NF-130	3	130	45	58	13	2500	1675	142004	M-20x2,5	130	140	1
								142023	M-16x1,5	67	80	2
								142028	M-16x1,5	99	112	2
NF-160	3	160	53	66	13	4000	3397	142005	M-20x2,5	130	140	1
								142024	M-20x1,5	62	75	2
								142026	M-20x1,5	135	145	2
NF-200	3	200	55	68	13	5000	4958	142006	M-24x3	158	176	1
NF-250	3	250	67	85	18	7000	8575	142007	M-30x2	94	117	2