

ST

Inclined marine exhaust mount designed to accommodate thermal expansion of the exhaust pipe whilst providing vibration isolation



The **ST AMC-MECANOCAUCHO® marine exhaust mounts** are designed to provide **elastic support for exhaust pipes** whilst allowing the movement caused by **thermal expansion and contraction**.

Their inclined configuration accommodates longitudinal movement of the exhaust pipe whilst limiting the transmission of **vibration, structure-borne noise and mechanical loads** to the vessel structure.

The mount also incorporates a **fail-safe mechanical restraint**, designed to withstand tensile and compressive loads and keep the exhaust pipe securely supported under the dynamic loads encountered on board.

ST mounts are particularly suitable for **marine engine and generator exhaust systems** where the installation must combine **vibration isolation, freedom for thermal expansion and mechanical safety**.

Drawings

TYPE A

TYPE A FIG 1


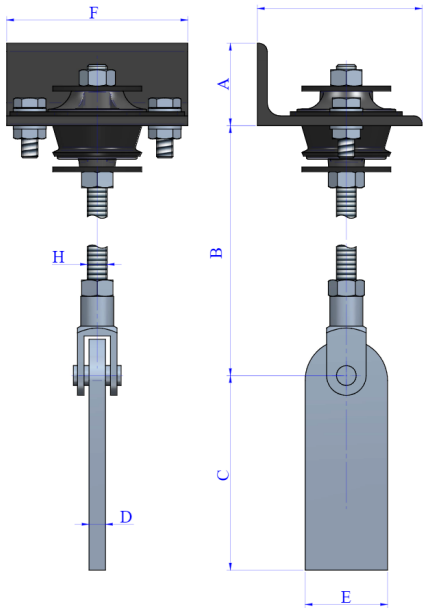



FIG 2

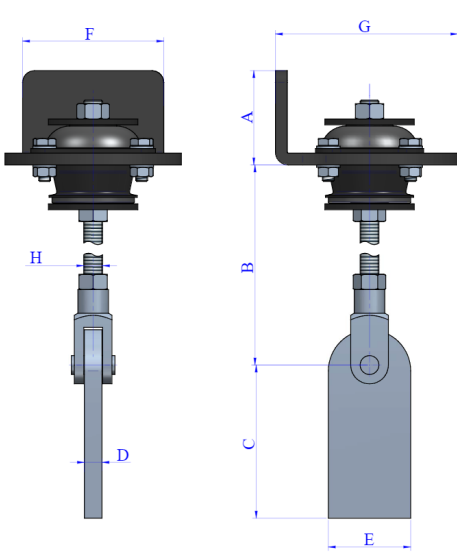

Type	Code	Descrip.	Max. Load (kg)	A(mm)	Shore	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)	I(mm)	Fig.
TYPE A	709101	ST-100 45Sh	75	50	45 Sh	325	118	10	50	110	100	M12	-	1
	709105	ST-100 60Sh	140	50	60 Sh	325	118	10	50	110	100	M12	-	1
	709111	ST-150 45Sh	100	50	45 Sh	325	118	10	50	110	100	M12	-	1
	709115	ST-150 60Sh	180	50	60 Sh	325	118	10	50	110	100	M12	-	1
	709121	ST-250 40Sh	140	80	40 Sh	477	130	15	70	120	120	M16	-	2
	709125	ST-250 60Sh	300	80	60 Sh	477	130	15	70	120	120	M16	-	2
	709131	ST-500 60Sh	500	80	60 Sh	477	130	15	70	120	120	M16	-	2
	709135	ST-500 70Sh	750	80	70 Sh	477	130	15	70	120	120	M16	-	2

TYPE B


TYPE B

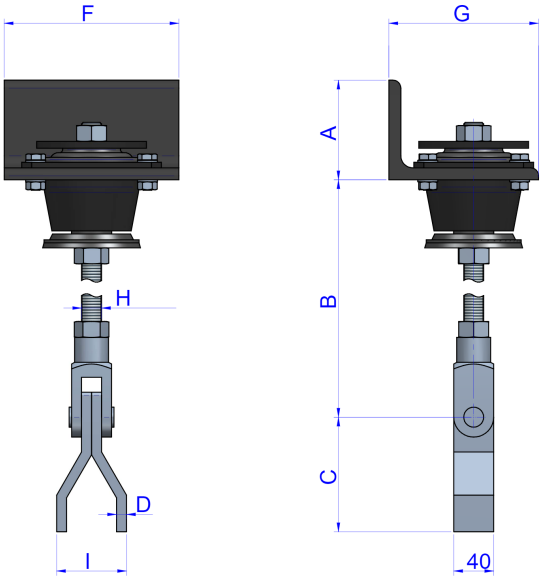

Type	Code	Descrip.	Max. Load (kg)	A(mm)	Shore	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)	I(mm)
TYPE B	709141	ST-1000 65Sh	1100	100	65 Sh	485	115	10	40	175	150	M20	50
	709145	ST-1000 75Sh	1560	100	75 Sh	485	115	10	40	175	150	M20	50



TYPE C

TYPE C

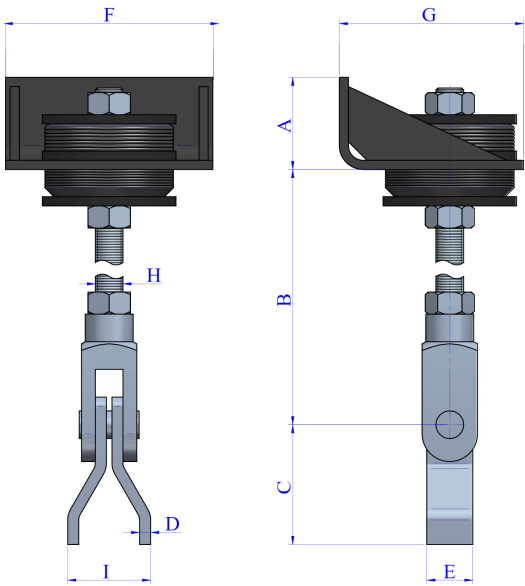

Type	Code	Descrip.	Max. Load (kg)	A(mm)	Shore	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)	I(mm)
TYPE C	709151	ST-2000 60Sh	2000	100	60 Sh	500	130	12	50	225	200	M30	66

Elastic properties

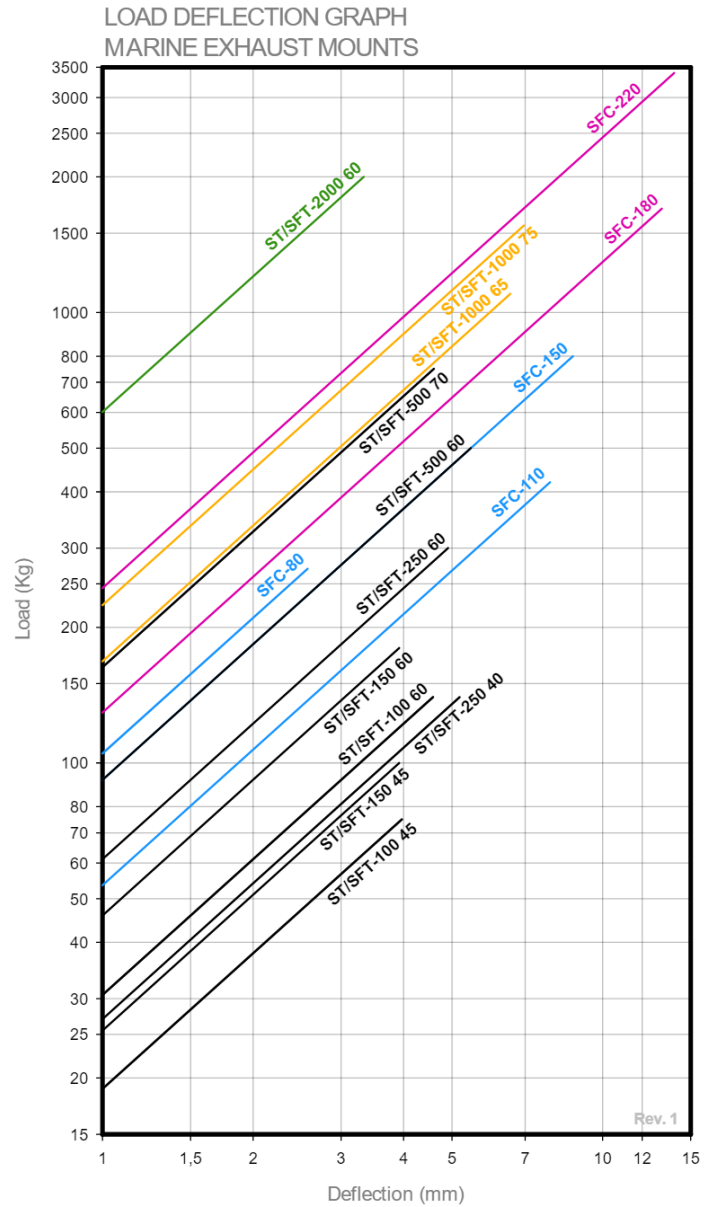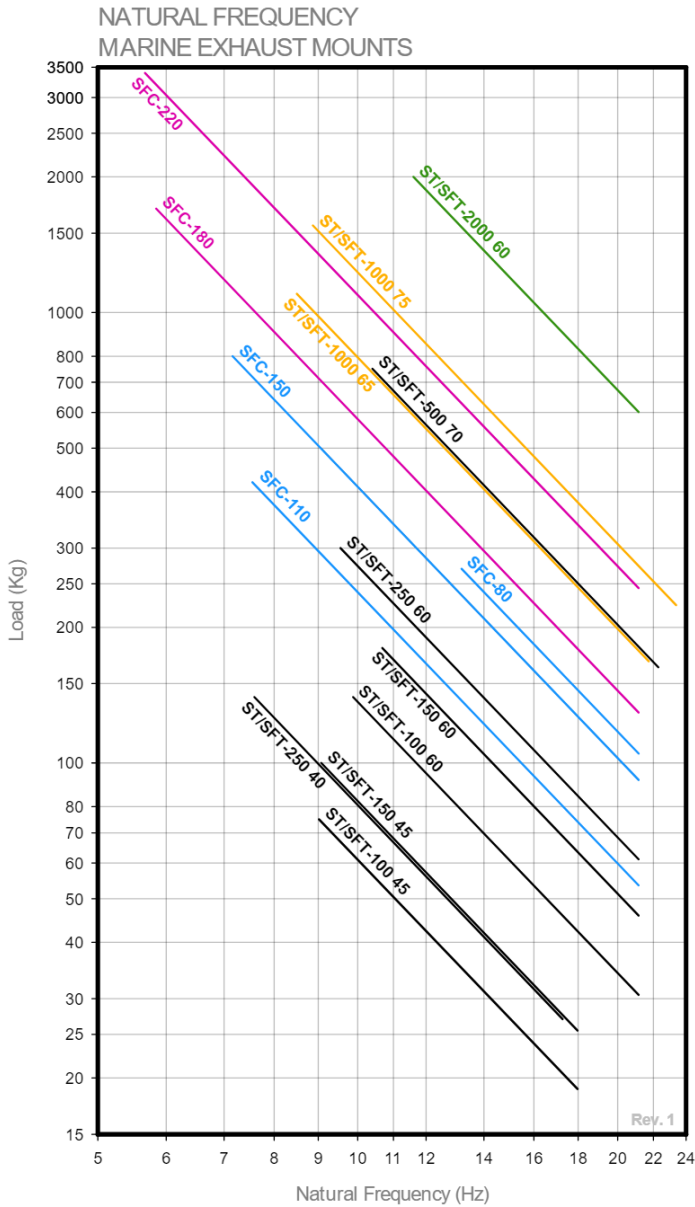

Technical characteristics

Their particular design allows the duct to displace when exposed to thermal expansions and contractions. There are 11 different models to suit hanging loads from 40Kg to 2000Kg.

All the **ST Marine Exhaust mounts** are equipped with interlocking metal parts to withstand to high compression and traction loads. This failsafe feature provides an extra safety for the application.