
EP 700 +Sylomer®

Resilient Wall Tie with Sylomer® for direct attachment of wall assemblies and acoustic ceilings. Fast and compact installation without threaded rods.

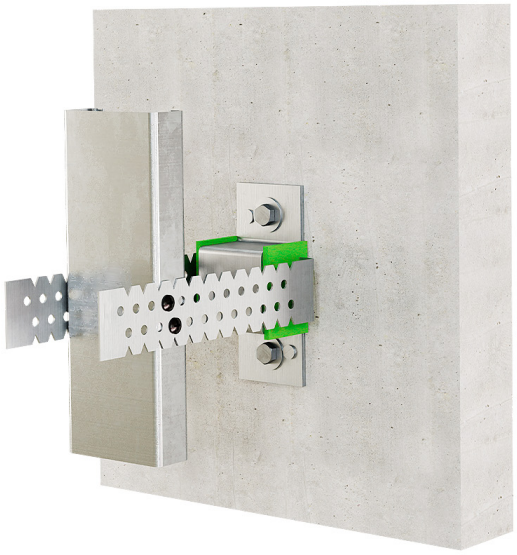

The **EP 700 + Sylomer® Resilient Wall Tie** is designed for the **acoustic decoupling of wall assemblies and ceilings**, helping to reduce the transmission of vibrations and **structure-borne sound** through the structure.

The **Sylomer® resilient element** provides effective decoupling between the supporting frame and the main structure, helping to improve the acoustic performance of the wall or ceiling.

Thanks to its **direct attachment without threaded rods**, the EP 700 + Sylomer® allows for simple, fast, and compact installation. It is particularly suitable for applications where **available installation height is limited**.


The Resilient Wall Tie is particularly suitable for **wood structures and ceilings**, where it can be attached directly using two screws, as well as for wall assemblies and acoustic ceilings requiring effective acoustic decoupling.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

Drawings

EP 700 + Sylomer®15 / EP 700 + Sylomer 30 / EP 700 + Sylomer 75

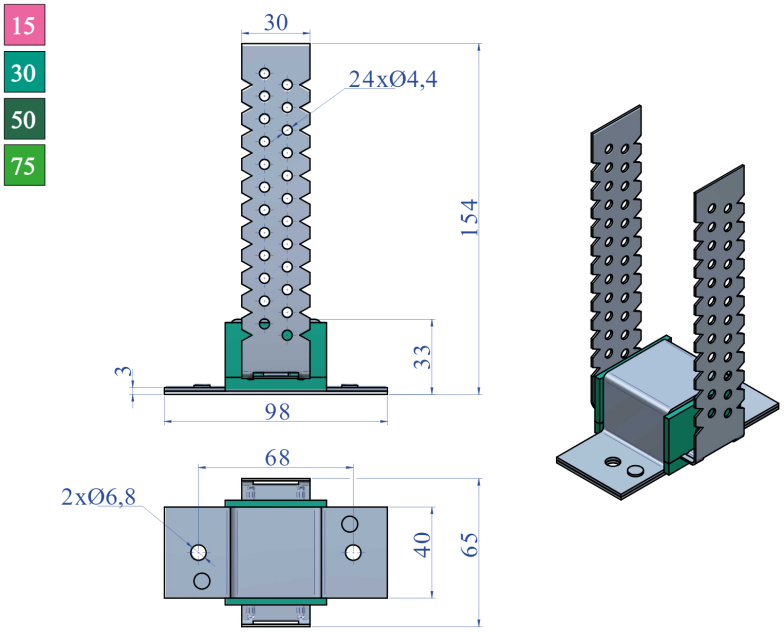


Type	Code	Max. Load(lbs)	Weight(lbs)
EP 700 + Sylomer®15	23727	33	0.44
EP 700 + Sylomer 30	23711	66	0.46
EP 700 + Sylomer 75	23712	165	0.48

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

EP 700 + sylomer 50

15
30
50
75

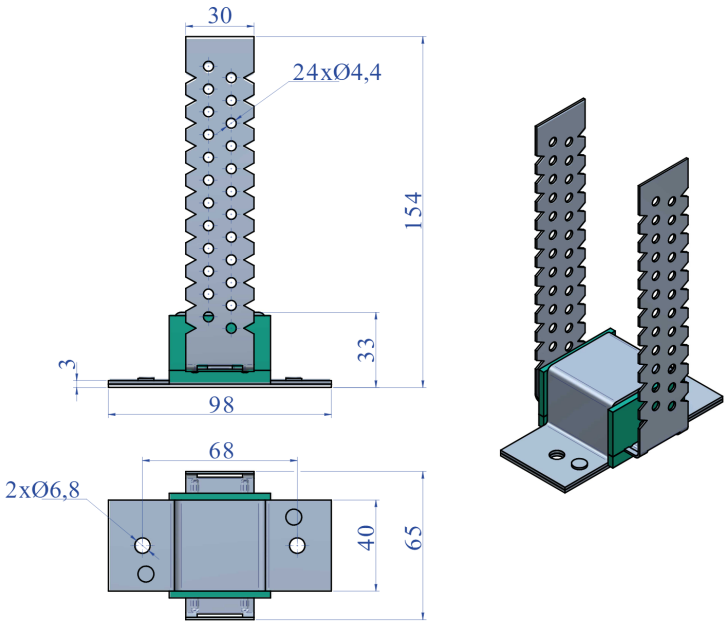

Type	SUMMARY	Code	Max. Load(lbs)	Weight(lbs)
EP 700 + sylomer 50	They are secured by two “predrilled” and bent pins to facilitate their installation. This principle can be used to make a wide range of variants. Contact us if you require a product more adapted to your building technique.	23728	242	1


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.


Elastic properties

LOAD DEFLECTION GRAPHS


EP 700 + Sylomer 15

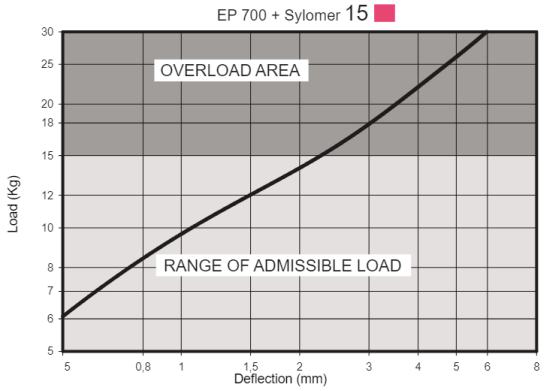


EP 700 + Sylomer 30

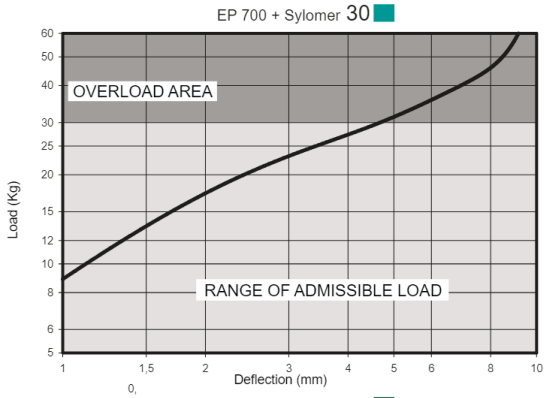

EP 700 + Sylomer 50

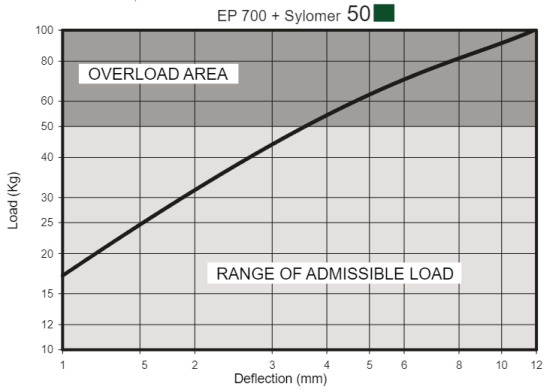


EP 700 + Sylomer 75

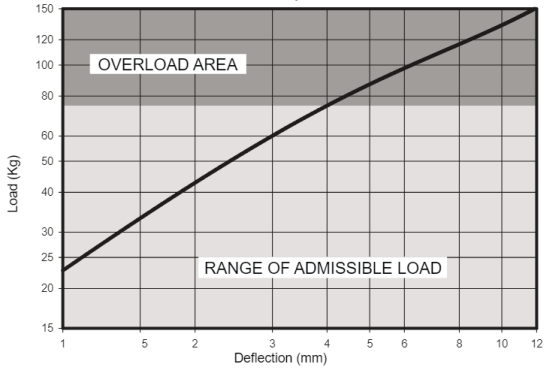


NATURAL FREQUENCY GRAPHS


EP 700 + Sylomer 15

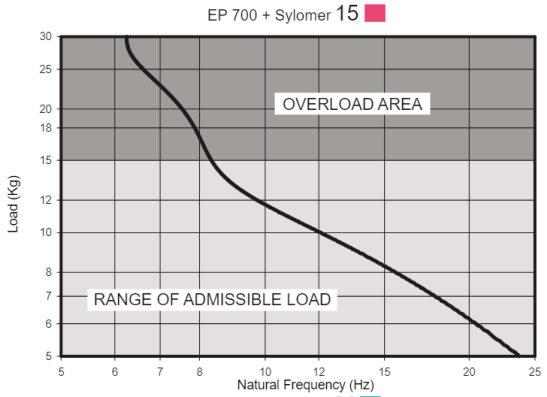


EP 700 + Sylomer 30

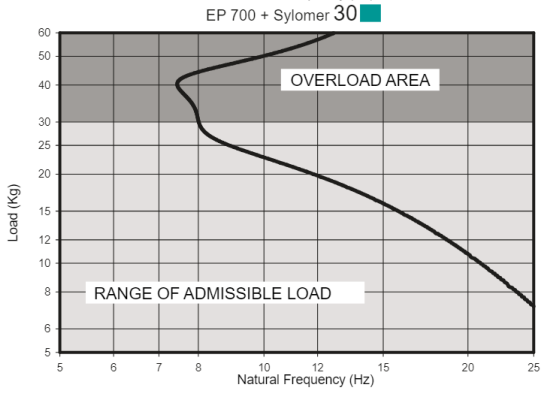

EP 700 + Sylomer 50

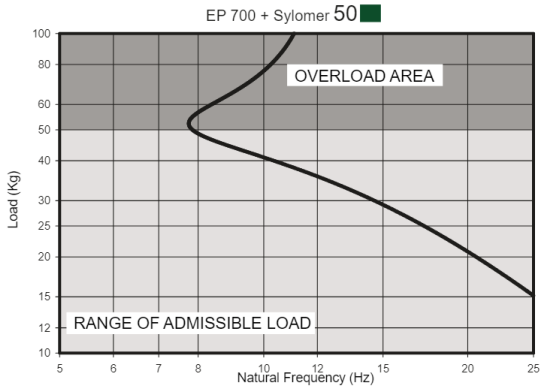

EP 700 + Sylomer 75

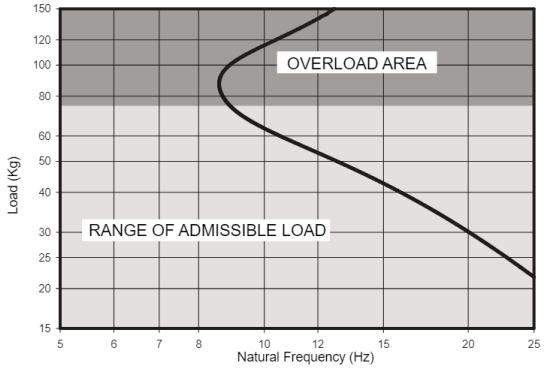

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.

Advantages

Easy installation

This mount requires no major modifications to the structure for installation.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

Improved isolation

It offers improved isolation compared to conventional anti-vibration mounts of similar geometry.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 16/11/2026.