KIT AKUSTIK HVAC M8

Kit of 16 vibration isolation hangers for M8 threaded rod, designed for elastic decoupling of ventilation ducts and HVAC equipment.



The **AMC-MECANOCAUCHO® AKUSTIK HVAC M8 Kit** includes **16 vibration isolation hangers**, specifically designed for the elastic suspension of **ventilation ducts, ductwork, and HVAC equipment**.

Their elastomer elements provide **vibration isolation between the suspended installation and the building structure**, helping to reduce the transmission of vibration and **structure-borne noise**.

The connection for **M8 threaded rod** allows easy integration into conventional suspension systems and provides simple and quick installation.

Thanks to their **low stiffness**, the AKUSTIK HVAC M8 hangers provide a **low natural frequency**, resulting in effective vibration isolation and reduced vibration transmission into the building structure.


Each kit is supplied in a bag containing 16 units, providing a practical and cost-effective solution for ventilation and HVAC installations.


AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com


In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 19/11/2026.

Drawings

AKUSTIK HVAC M8

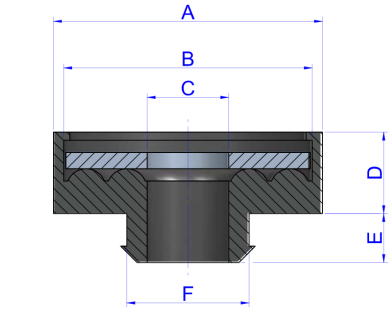



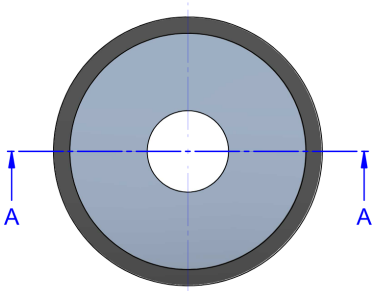

Type	A(in)	B(in)	C(in)	D(in)	E(in)	F(in)	Code	Descrip.	Max. Load(lbs)	Weight(lbs)
AKUSTIK HVAC M8	Ø27	Ø25	Ø8,5	0.39	0.24	Ø11,5	649115	100 uds.	33	3
							649116	1200 uds.	33	35

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 19/11/2026.