


Mini Anti-Seismic Spring Isolator

Compact anti-seismic spring isolator for low-frequency vibration isolation, with an integrated seismic restraint system.

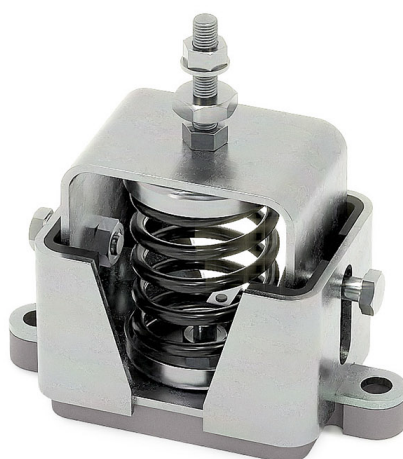

The **AMC-MECANOCAUCHO® Mini Anti-Seismic Spring Isolator** is designed to provide **effective low-frequency vibration isolation** while offering mechanical protection of the equipment under seismic loads.


Its compact design incorporates a **high-deflection steel spring**, providing a **low natural frequency** and effectively reducing the transmission of vibration from the equipment to the supporting structure.

Under normal operating conditions, the spring has the freedom of movement required for effective vibration isolation. Under exceptional or seismic loads, the **integrated seismic restraint system** limits excessive equipment movement while helping maintain its mechanical integrity.

Thanks to its **compact dimensions**, the Mini range is particularly suitable for installations with **limited available space** and mechanical equipment requiring both **low-frequency vibration isolation and seismic protection**.


Drawings

ANTI-SEISMIC MINI + SYLOMER

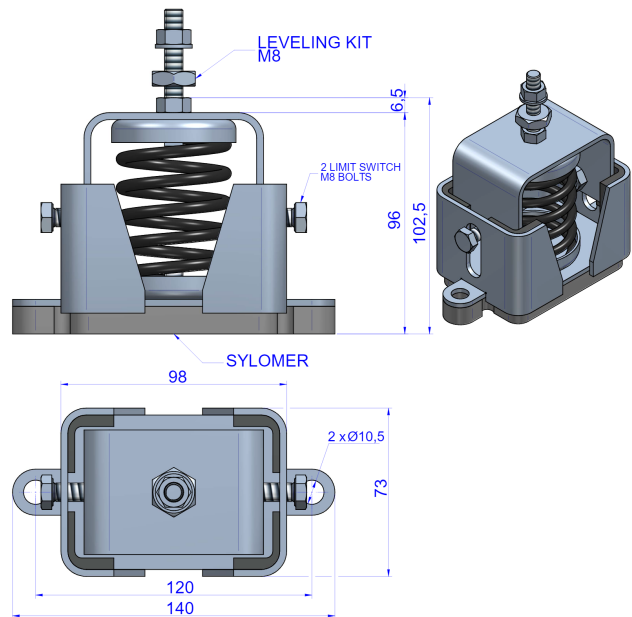


Type	Code	Spring color	Max. Load (lbs)	K(N/mm)	Weight(lbs)
ANTI-SEISMIC MINI + SYLOMER	21224	BLACK	18	3,3	2
	21222	BLACK	33	8,5	2
	21261	BLACK	55	12	2
	21262	BLUE	110	28	2
	21263	GREY	165	38	3
	21264	BEIGE	220	52	3
	21265	WHITE	276	58	3
	21266	BLACK	331	79	3
	21267	RED	551	130	2

ANTI-SEISMIC MINI

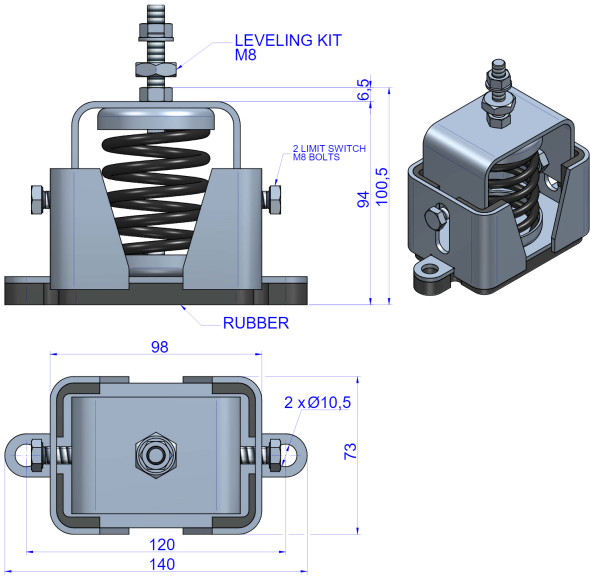

Type	Code	Spring color	Max. Load (lbs)	K(N/mm)	Weight(lbs)
ANTI-SEISMIC MINI	21278	BLACK	18	3,3	2
	21270	BLACK	33	8,5	2
	21271	BLACK	55	12	2
	21272	BLUE	110	28	2
	21273	GREY	165	38	3
	21274	BEIGE	220	52	3
	21275	WHITE	276	58	3
	21276	BLACK	331	79	3
	21277	RED	551	130	2

Elastic properties

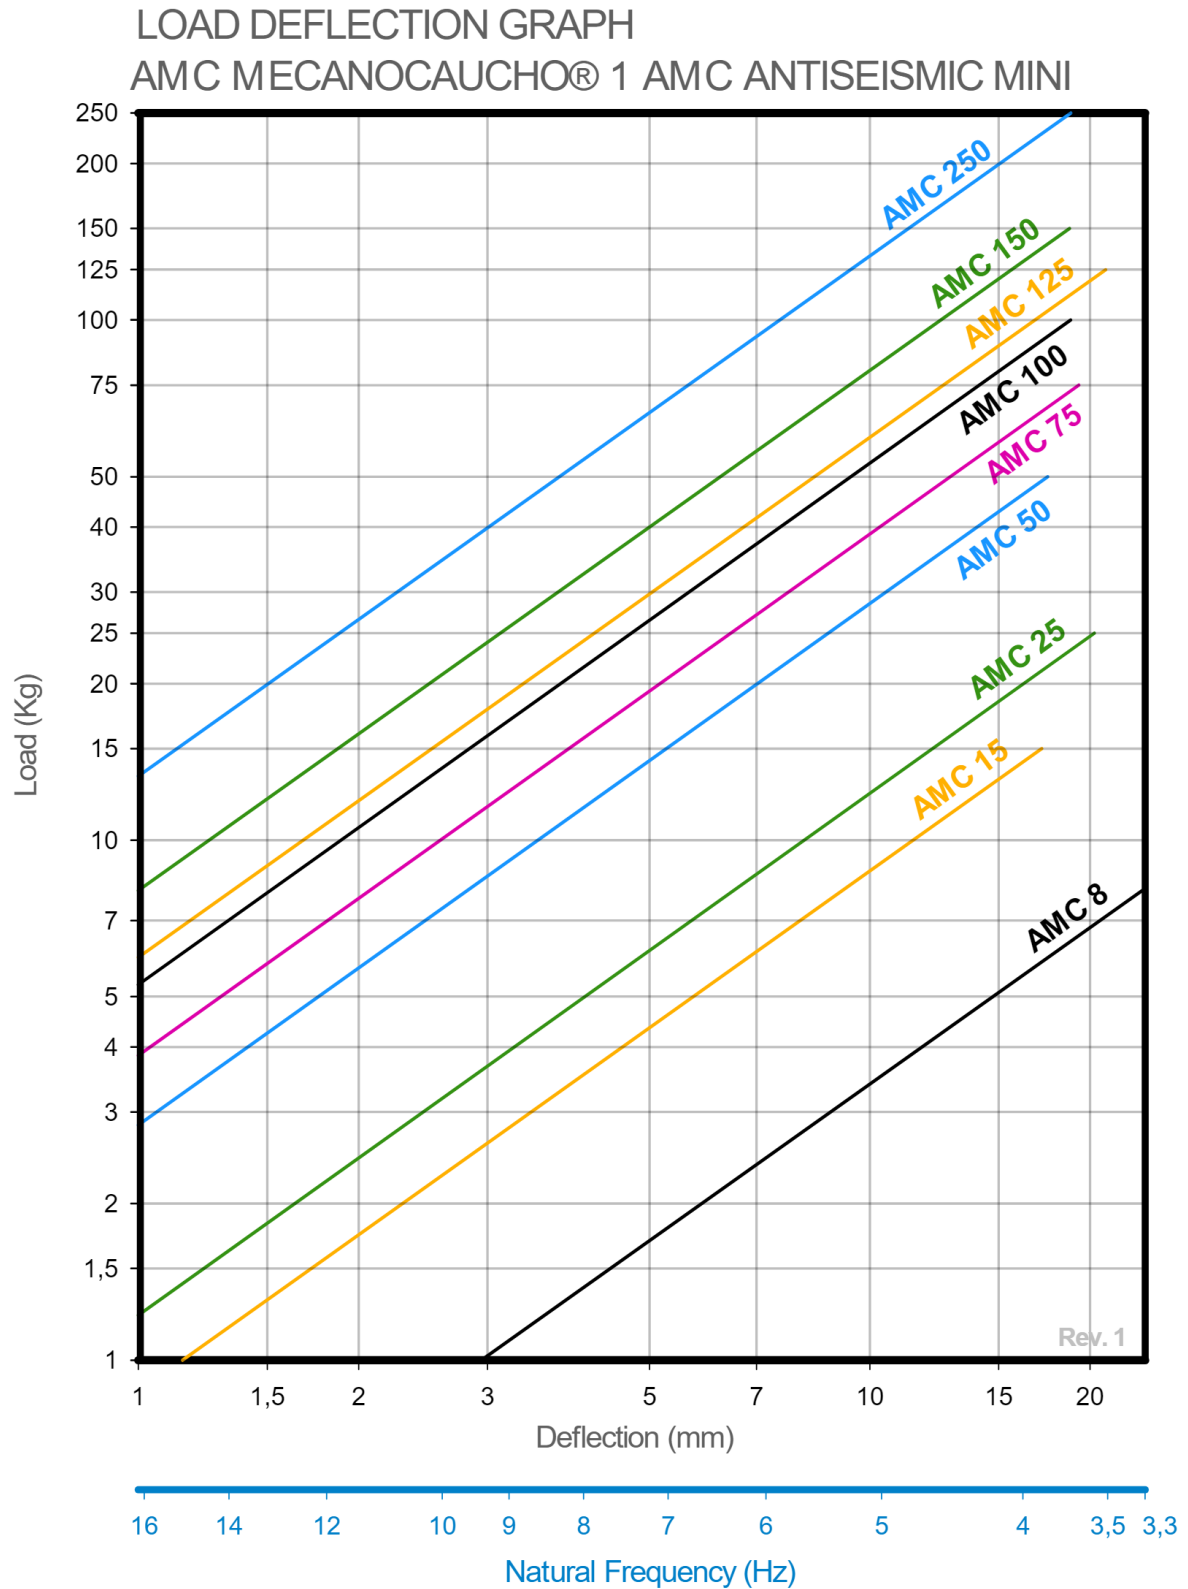

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com