


# Akustik + Sylomer® Floor Mount – Structural noise Isolator for Floating Floors

Vibration-damping support with a 'U' profile for 50 mm battens. Ideal for floating wooden floors, with leveling and direct fixing to the floor.

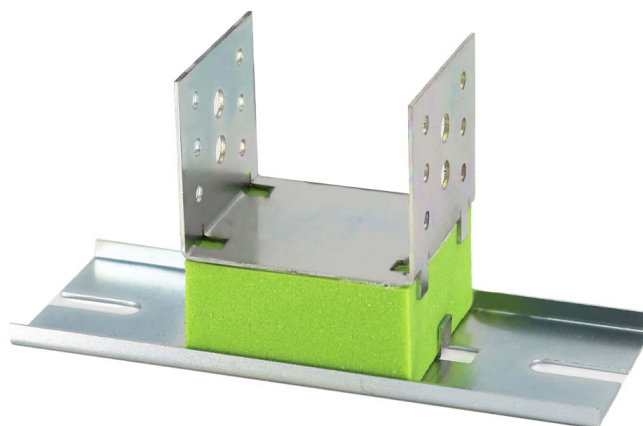

The **Akustik + Sylomer® Floor Mounts** are designed to provide **point-supported acoustic decoupling for floating floors** constructed on a batten system. Their low height allows particularly shallow floor build-ups.


As with all products in the **AMC Akustik range**, correct loading is essential to achieve optimum **structure-borne and impact sound isolation**. The Floor Mounts are therefore available in different load ratings, from **25 to 100 kg per mount**.

Under the appropriate load, **natural frequencies of up to 12 Hz** can be achieved, effectively reducing the transmission of structure-borne sound through the building structure and providing a **high level of impact sound reduction**.

According to measurements carried out by independent testing laboratories, **Akustik + Sylomer® Floor Mounts can provide an improvement in impact sound insulation of up to 30 dB**.



# Drawings

## Akustik+Sylomer® 25 Floor Mount

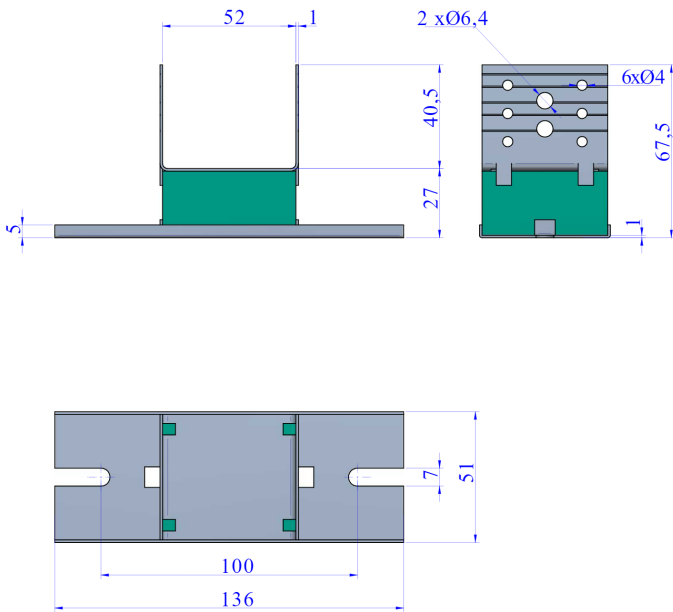



| Type                            | SUMMARY                                                 | Code  | Max. Load(lbs) | Weight(lbs) | Thickness(in) |
|---------------------------------|---------------------------------------------------------|-------|----------------|-------------|---------------|
| Akustik+Sylomer® 25 Floor Mount | Mounts for installing wooden floors with batten system. | 23562 | 55             | 0.29        | 0.98          |

## Akustik+Sylomer® 30 Floor Mount

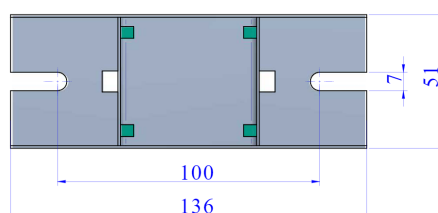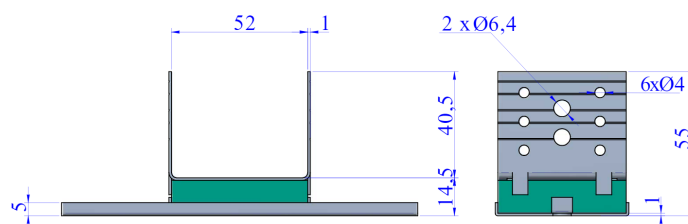


| Type                            | SUMMARY                                                 | Code  | Max. Load(lbs) | Weight(lbs) | Thickness(in) |
|---------------------------------|---------------------------------------------------------|-------|----------------|-------------|---------------|
| Akustik+Sylomer® 30 Floor Mount | Mounts for installing wooden floors with batten system. | 23561 | 66             | 0.27        | 0.47          |

## Akustik+Sylomer® 40 Floor Mount

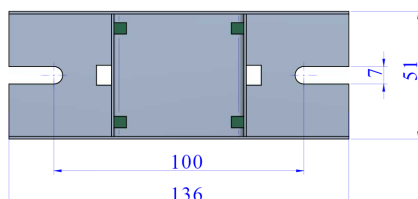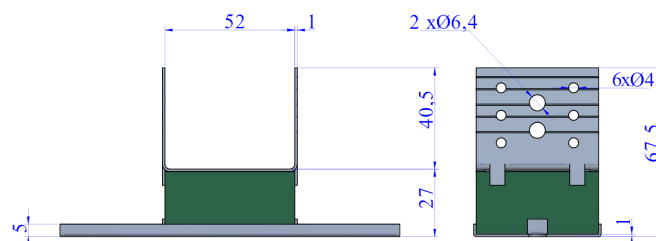


| Type                            | SUMMARY                                                 | Code  | Max. Load(lbs) | Weight(lbs) | Thickness(in) |
|---------------------------------|---------------------------------------------------------|-------|----------------|-------------|---------------|
| Akustik+Sylomer® 40 Floor Mount | Mounts for installing wooden floors with batten system. | 23261 | 88             | 0.29        | 0.98          |

## Akustik+Sylomer® 75 Floor Mount

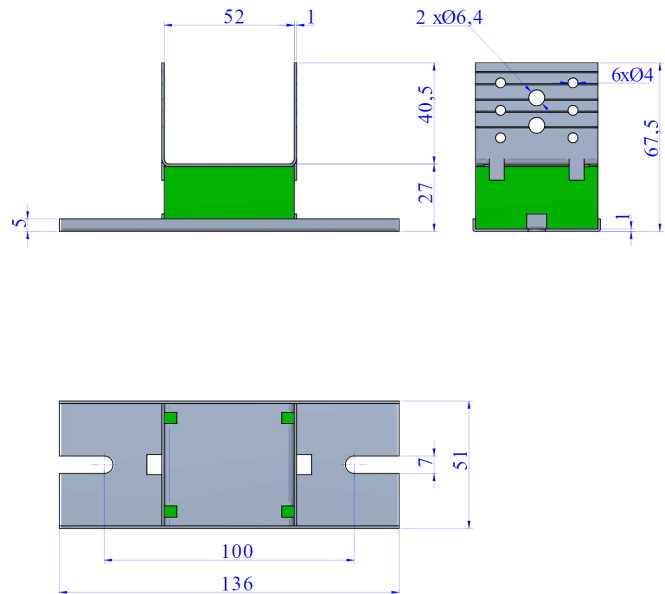


| Type                            | SUMMARY                                                 | Code  | Max. Load(lbs) | Weight(lbs) | Thickness(in) |
|---------------------------------|---------------------------------------------------------|-------|----------------|-------------|---------------|
| Akustik+Sylomer® 75 Floor Mount | Mounts for installing wooden floors with batten system. | 23564 | 165            | 0.28        | 0.98          |

## Akustik+Sylomer® 100 Floor Mount

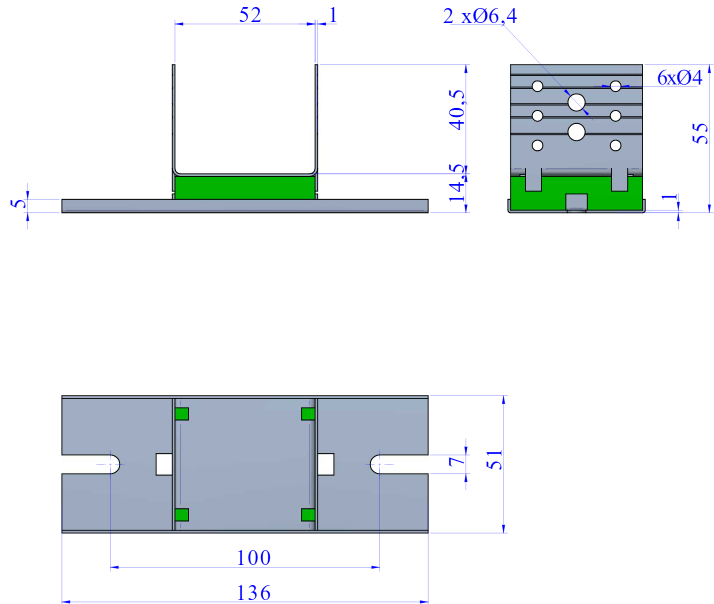

| Type                             | SUMMARY                                                 | Code  | Max. Load(lbs) | Weight(lbs) | Thickness(in) |
|----------------------------------|---------------------------------------------------------|-------|----------------|-------------|---------------|
| Akustik+Sylomer® 100 Floor Mount | Mounts for installing wooden floors with batten system. | 23563 | 220            | 0.28        | 0.47          |

## Elastic properties

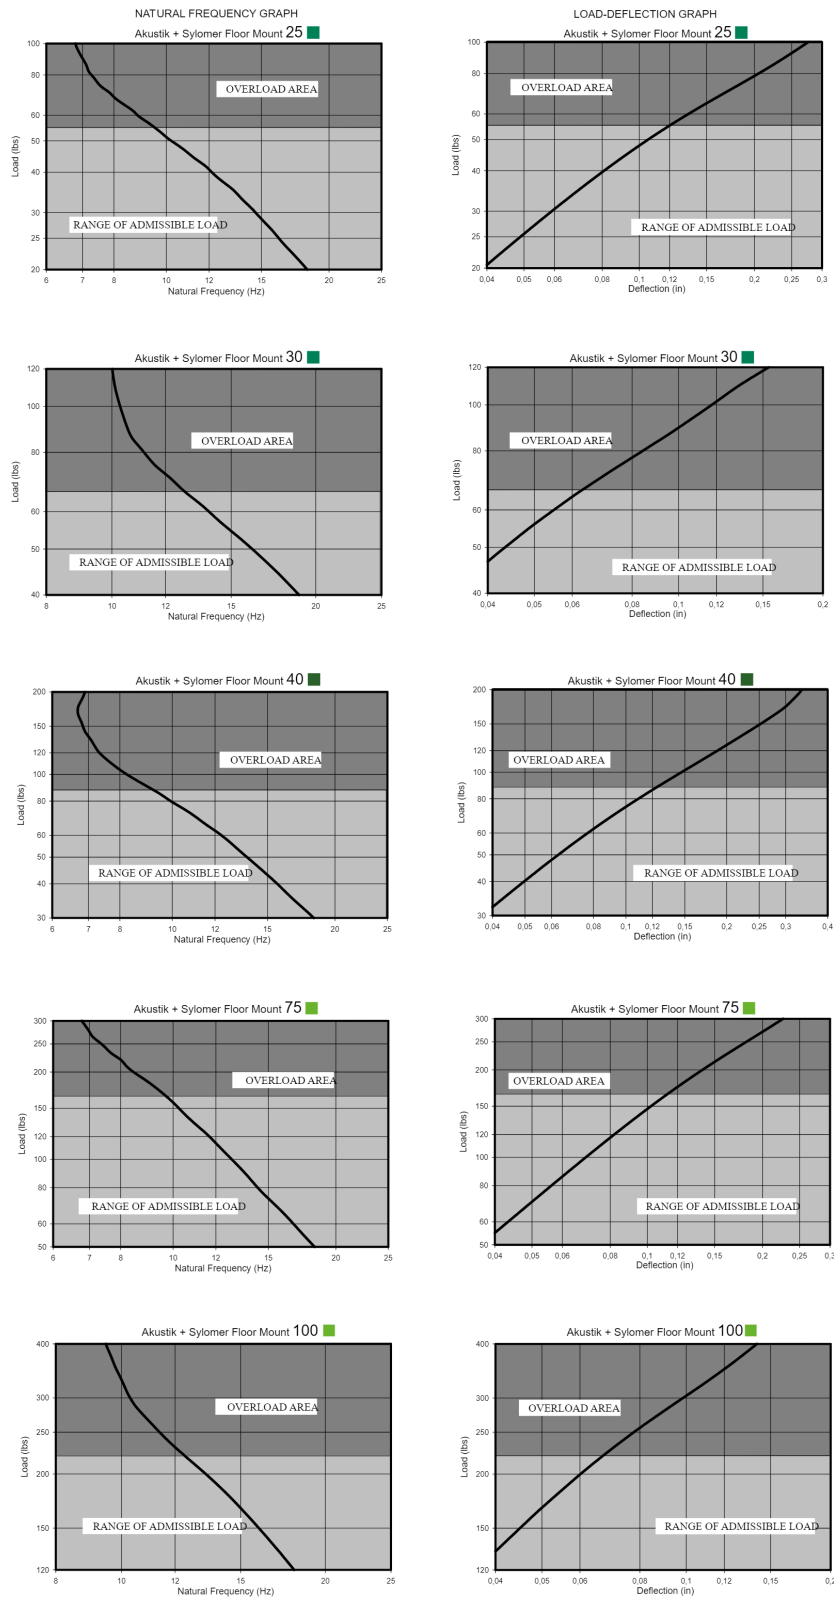

**AMC MECANOCAUCHO**

Industrialdea Zona A - Pab. 35.  
Asteasu E-20159, Gipuzkoa  
Spain



Tel.: +34 843 74 00 13  
Fax: +34 943 69 62 19



[sales@amcsa.es](mailto:sales@amcsa.es)



[www.mecanocaucho.com](http://www.mecanocaucho.com)  
[www.akustik.com](http://www.akustik.com)