Akustik + Sylomer® Channel Clip

Acoustic Channel Clip with Sylomer® for metal furring channels. Quick clip-on and screw attachment with a low-profile design.

The **Akustik + Sylomer® Channel Clip** is an acoustic clip designed for the **decoupling of metal framing in wall assemblies and suspended ceilings**, with direct attachment of the furring channels.

Its design allows **quick and easy installation of the channel**, which is mechanically retained and then secured with a screw. Its low-profile design enables high-performance acoustic wall assemblies and ceilings while **minimizing the loss of space**.

The **Sylomer® resilient elements** provide decoupling between the metal framing and the supporting structure, effectively reducing the transmission of vibrations and **structure-borne sound**, as well as minimizing acoustic bridges at the attachment points.

Its robust **fail-safe metal construction** ensures reliable and durable attachment. The Channel Clip is particularly suitable for **acoustic wall assemblies, suspended ceilings, studios, residential buildings, auditoriums, and soundproofing projects**, in both new construction and renovation applications.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 07/11/2026.

Drawings

Akustik + Sylomer® Channel Clip 15

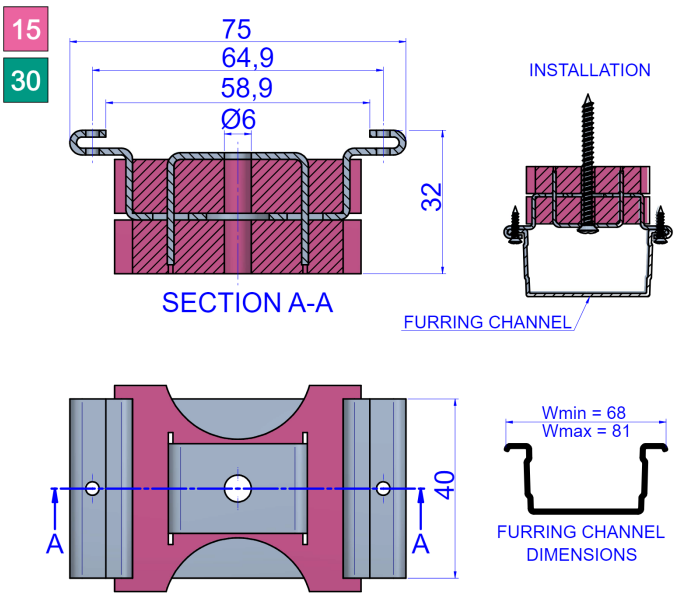

Type	Code	Max. Load(lbs)	Weight(lbs)
Akustik + Sylomer® Channel Clip 15	23271	33	0.18

Akustik + Sylomer® Channel Clip 30

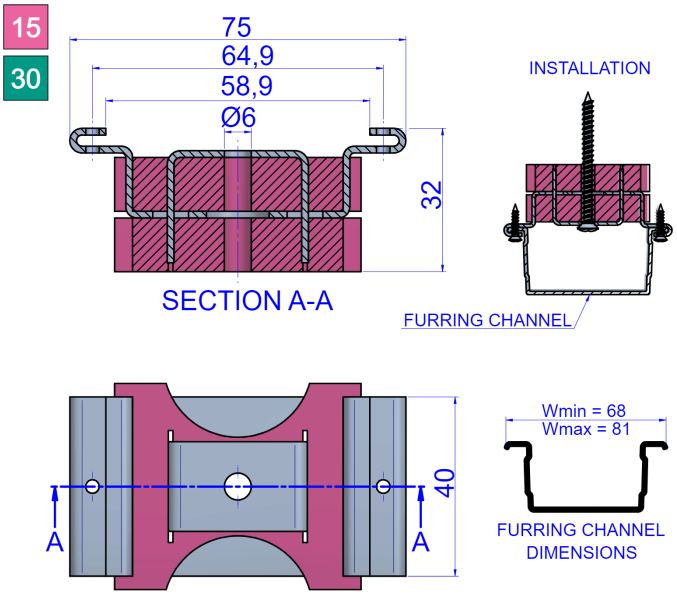

Type	Code	Max. Load(lbs)	Weight(lbs)
Akustik + Sylomer® Channel Clip 30	23319	66	0.19

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 07/11/2026.

Elastic properties

LOAD-DEFLECTION GRAPH
Akustik + Sylomer Channel Clip 15

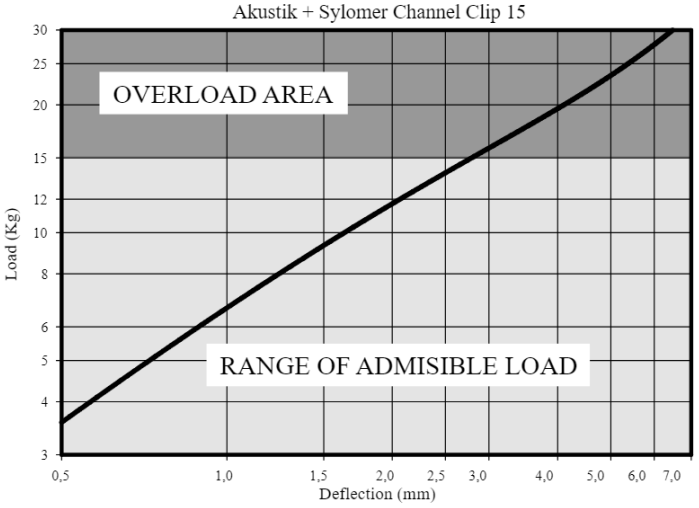

NATURAL FREQUENCY GRAPH
Akustik + Sylomer Channel Clip 15

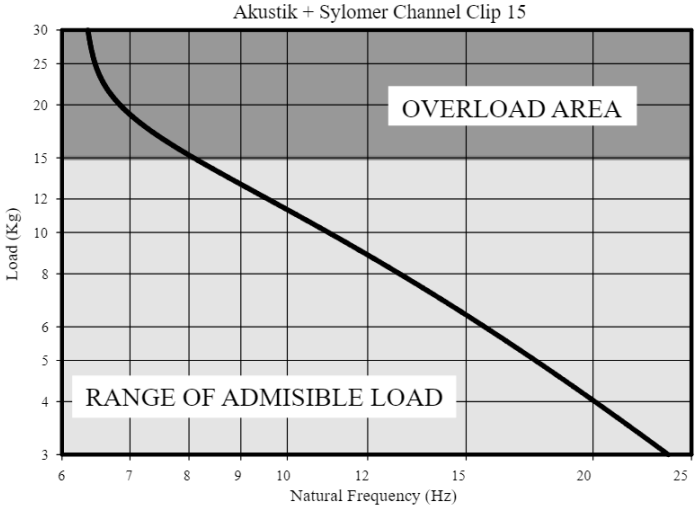

LOAD-DEFLECTION GRAPH
Akustik + Sylomer Channel Clip 30

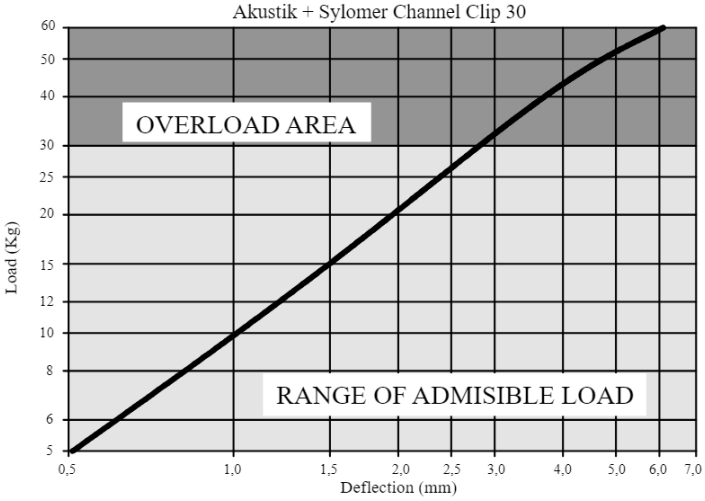

NATURAL FREQUENCY GRAPH
Akustik + Sylomer Channel Clip 30

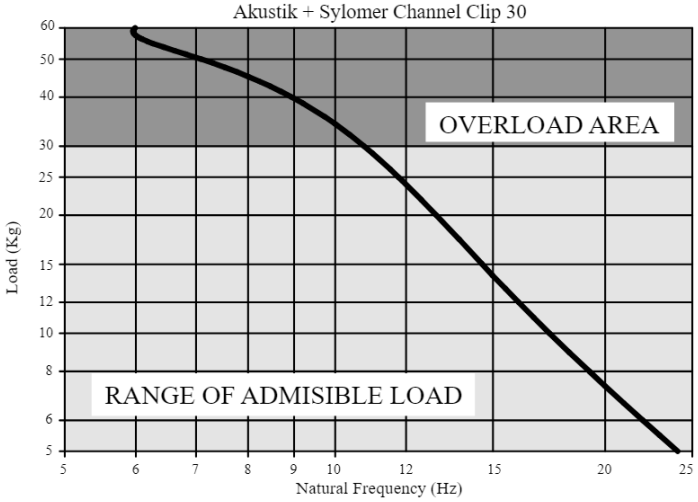

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 07/11/2026.

Advantages

Easy installation

This mount requires no major modifications to the structure for installation.

Incorporates Sylomer® elastomer, highly effective for isolating both high and low frequencies

Sylomer® provides high isolation across a wide frequency range and is particularly effective at high frequencies, effectively eliminating the transmission of structure-borne noise.

Secure ceiling anchorage

With more than one attachment point to the overhead slab, it is particularly reliable for anchors with low load-bearing capacity.

AMC MECANOCAUCHO
Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain
Tel.: +34 843 74 00 13
sales@amcsa.es
www.mecanocaucho.com

In order to adapt its products to the state of the art, Aplicaciones Mecánicas del Caucho, S.A. reserves the right to modify the conception and manufacture of the materials presented in this catalog without prior notice.
Document generated on 07/11/2026.