

EP + Sylomer® Resilient Wall Tie

Resilient Wall Tie with two Sylomer® elements. Available with M6 and M8 male or female fixings for effective isolation under both tensile and compressive loads.



The **EP + Sylomer® Resilient Wall Tie** is designed for the **acoustic decoupling of wall linings and their supporting frames**, helping to reduce the transmission of vibrations and **structure-borne sound** through the structure.


Its design incorporates **two Sylomer® resilient elements**, providing effective isolation under both **tensile and compressive loads**. It is available with different **M6 and M8 male or female fixing configurations**, facilitating its integration into different construction systems.

Its **robust, fail-safe metal construction** provides good mechanical strength and secure fixing, particularly in applications subject to high mechanical requirements.

The EP + Sylomer® can also be used for the **resilient decoupling of vertical pipework and lightweight ducts**, helping to reduce the transmission of vibrations to the building structure.



Drawings

EP + Sylomer Type B M6

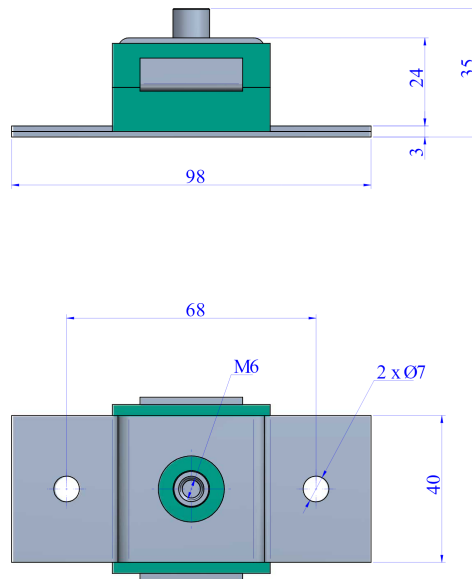



Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
EP + Sylomer Type B M6	It is secured to the wall by means of two holes. It has a female M6 metal insert.	30	23701	0.167

EP + Sylomer Type B M8

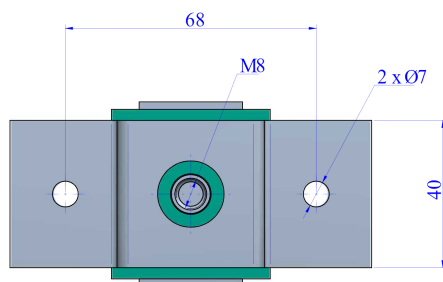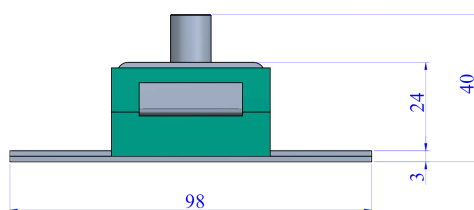


Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
EP + Sylomer Type B M8	It is secured to the wall by means of two holes. It has a female M8 metal insert.	30	23720	0.167

EP + Sylomer Type A M6

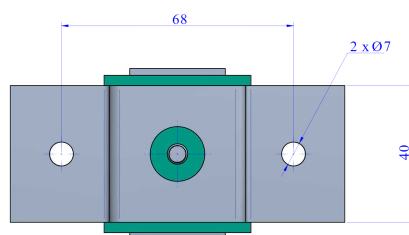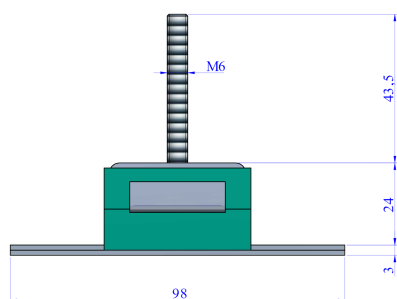

Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
EP + Sylomer Type A M6	It is secured to the wall by means of two holes. It has a female M6 metal insert.	30	23703	0.163


EP + Sylomer Type A M8

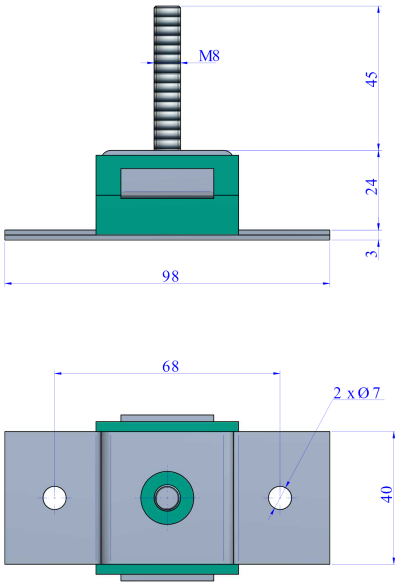


Type	SUMMARY	Max.Load (kg)	Code	Weight(kg)
EP + Sylomer Type A M8	It is secured to the wall by means of two holes. It has a female M8 metal insert.	30	23702	0.163

Elastic properties

LOAD DEFLECTION GRAPH
EP Akustik+Sylomer®

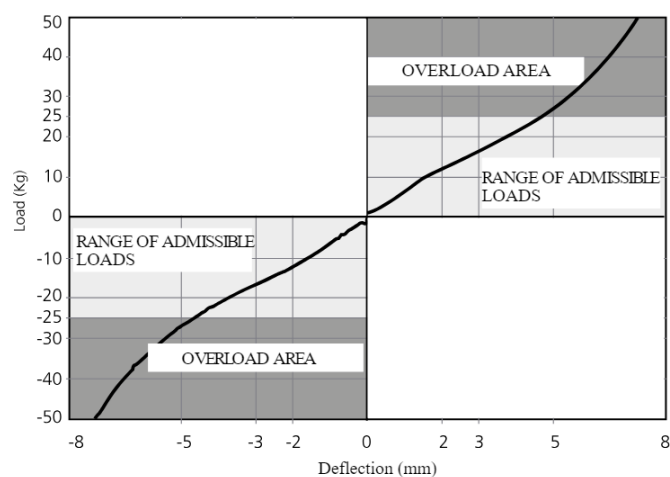

NATURAL FREQUENCY GRAPH
EP Akustik+Sylomer®

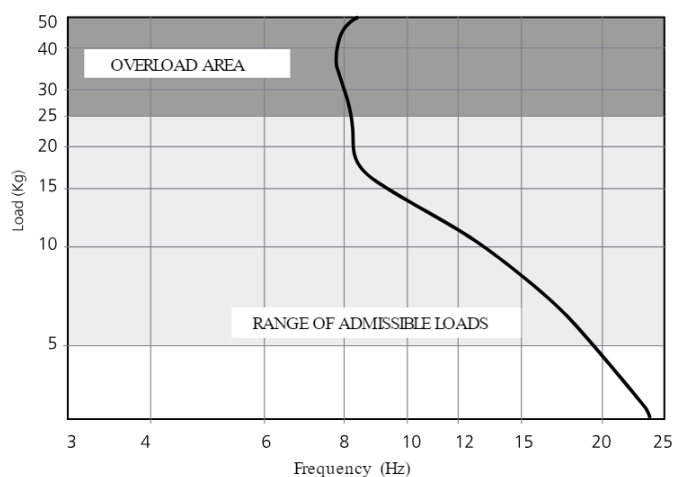

AMC MECANOCAUCHO

Industrialdea Zona A - Pab. 35.
Asteasu E-20159, Gipuzkoa
Spain



Tel.: +34 843 74 00 13
Fax: +34 943 69 62 19



sales@amcsa.es



www.mecanocaucho.com
www.akustik.com